

# MSR Gold™ FastFit

## MSR Gold™ 1500 FastFit 1CT



MSR Gold™ FastFit – easy lamp replacement in seconds. All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen and Ceramic ST lamps, switching between lamp technologies can be done quickly and easily.

### Product data

#### • General Characteristics

System Description	FastFit
Cap-Base	PGJX50
Cap-Base Information	PGJX50
Execution	-
Operating Position	any
Main Application	Entertainment
Life to 50% failures	750 hr
EM	

#### • Electrical Characteristics

Lamp Wattage	1500 W
Lamp Wattage Technical	1500 W
Lamp Current	15.3 A
Ignition Supply Voltage	198 (min) V
Dimmable	Yes

#### • Light Technical Characteristics

Color Rendering Index	80 Ra8
Color Temperature	6000 K
Color Temperature Technical	6000 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	333 -
Luminous Flux Lamp EM	100600 (min), 120000 (nom) Lm

Luminous Efficacy Lamp EM	80 Lm/W
---------------------------	---------

#### • Product Dimensions

Overall Length C	128 (max) mm
Diameter D	28 (max) mm
Width F	41 mm
Light Center Length L	64 (min), 65 (nom), 66 (max) mm
Arc Length O	5.5 mm


#### • Luminaire Design Requirements

Pinch Temperature	500 (max) C
Bulb Temperature	950 (max) C

#### • Product Data


Order code	928107305114
Full product code	928107305114
Full product name	MSR Gold™ 1500 FastFit 1CT
Order product name	MSR Gold 1500 FastFit 1CT/8
Pieces per pack	1
Packing configuration	8
Packs per outerbox	8
Bar code on pack - EAN1	8727900908541
Bar code on outerbox - EAN3	8727900908558
Logistic code(s) - 12NC	928107305114
Net weight per piece	0.131 kg

Dimensional drawing





MSR GOLD™ 1500, 2000(/2), 2500/2

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR GOLD 1500 FastFit	-	-	-	128	28	-	-	41	-	64	65	66	5.5



Photometric data

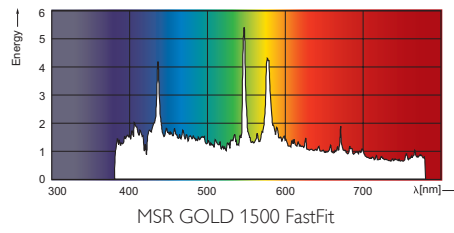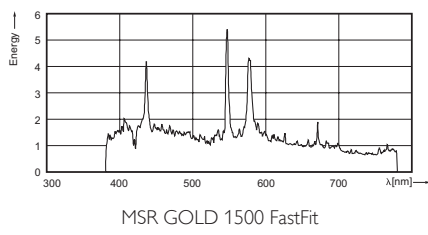

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, June 7  
data subject to change