

Part number

# PE 3264 PI



## Brief description:

bulkhead mounting housings, sockets, 3 poles + PE, 32 (A.C.), 380 ÷ 415V, 6 red, inclined, IP44

Product description		Approvals / Standards	
<b>Model</b>	sockets	<b>Reference standard</b>	EN 60309-1 and -2
<b>Version</b>	PLUSO, plugs and socket-outlets	<b>Quality mark</b>	
<b>Series</b>	PE...PI	<b>General ordering information</b>	
<b>Product type</b>	flush-mounting	<b>EAN13 code</b>	8015747067294
<b>Style</b>	inclined	<b>Packaging Information</b>	
<b>Family</b>	plugs and socket-outlets	<b>Packaging length</b>	330,00 mm
<b>Size</b>	socket fixing centre distance 77 x 85 mm	<b>Packaging height</b>	175,00 mm
<b>N. of poles</b>	3 poles +	<b>Packaging width</b>	295,00 mm
<b>Clock position</b>	6	<b>Packaging weight</b>	2,50 kg
<b>Technical data</b>		<b>Packaging volume</b>	17,04 dm <sup>3</sup>
<b>Current</b>	32 A	<b>Packaging description</b>	Carton box
<b>Voltage</b>	380 ÷ 415 V	<b>Packaging quantity</b>	10 Pcs
<b>Frequency</b>	50 and 60 Hz.	<b>Packaging EAN code</b>	8015747067300
<b>Operating temperature range (min, max)</b>	-40°C ... +125°C		
<b>Material</b>	thermoplastic		
<b>IP degree of protection</b>	IP44		
<b>Further technical details</b>			
<b>Weight</b>	202,00 g		


Part number

# PE 3264 PI



Catalogue drawings

(16 / 32A) PE ... PI

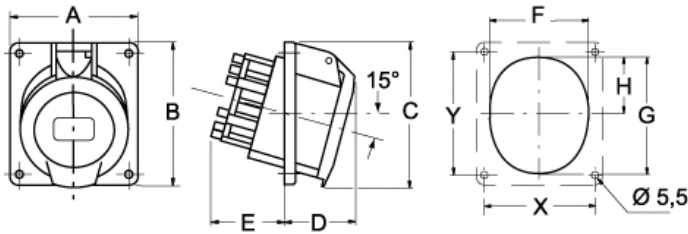

PE ... PI	A	B	C	D	E	F	G	H	X	Y
<b>16A</b> 2P+⊕	64	82	82	38	46	52	62	30	52	60
3P+⊕	64	82	82	42	47	57	65	28	52	60
3P+N+⊕	92	100	100	43	47	66	78	37,5	77	85
<b>32A</b> 2P+⊕	92	100	100	40	55	68	76	35,5	77	85
3P+⊕	92	100	100	40	55	68	76	35,5	77	85
3P+N+⊕	92	102	102	43	55	74	86	39,5	77	85

## Notes

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PI types (IP44), spring lid
- PEW...PI types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)