


BEAM ANGLE: 50°

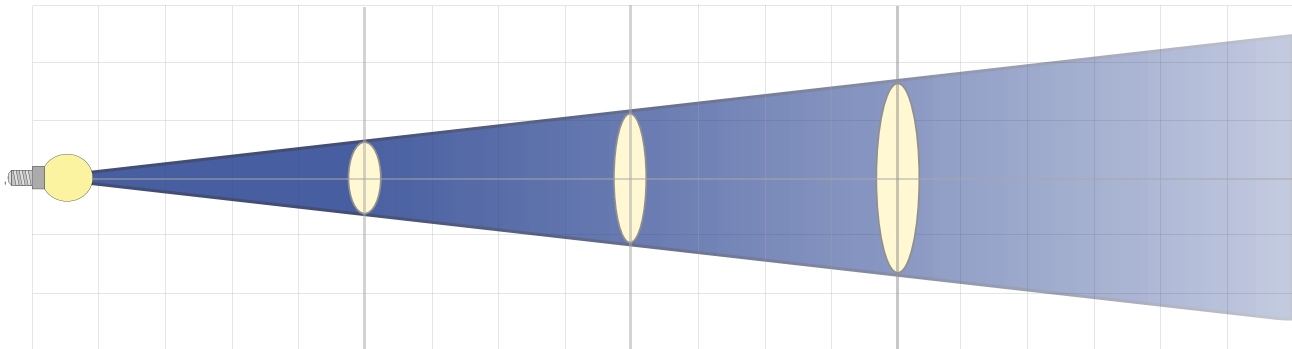

DIAMETER (m)	3m	5m	7m
Lux	3139	1753	760
SPOT DIAMETER (m)	11	18	26

### B2FC 600W FULL COLOR NEW LED LUX DATA

Illumination (lux)	3m	5m
R	341.2lx	155.9lx
G	965lx	426.7lx
B	175lx	76.2lx
RGB	845.8lx	361lx
W	3139lx	1753lx
RGBW	3748lx	1588lx

Color Temperature (k)	3m	5m
R	1000k	1000k
G	7325k	7325k
B	100000k	100000k
RGB	100000k	100000k
W	6374k	6374k
RGBW	8419k	8419k

Wave length (nm)	3m	5m
R	626.7(nm)	626.7(nm)
G	533.7(nm)	533.7(nm)
B	459.1(nm)	459.1(nm)
RGB	467.2(nm)	467.2(nm)
W	479.9(nm)	479.9(nm)
RGBW	427.1(nm)	427.1(nm)

Ra	3m	5m
R	10(Ra)	10(Ra)
G	-27.3	-27.3
B	-59.6	-59.6
RGB	52.2(Ra)	52.2(Ra)
W	86.3(Ra)	86.3(Ra)
RGBW	90(Ra)	90(Ra)

Rated power (W)	
R	159W
G	222W
B	228W
RGB	351W
W	653W
RGBW	716W

Strobe power(W)
1200W