

HALOLINE Standard

Double ended halogen lamps with tube base



Areas of application

- Ideal for emphasizing and accentuating buildings
- General illumination
- Entrance lighting
- Pathway lighting
- Garden lighting
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Outdoor applications only in suitable luminaires

Product benefits

- Brilliant accent light
- No transformer required
- Contains no mercury

Product features

- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Color temperature: 3,000 K
- Burning position: p15

Product family datasheet


Technical data

Product description	Electrical data				Photometrical data		Light technical data		Dimensions & weight		Lifespan
	Nominal wattage	Nominal voltage	Rated wattage	Power factor λ	Color temperature	Color rendering index Ra	Starting time	Warm-up time (60 %)	Diameter	Overall length	Nominal lamp life time
HALOLINE 750 W 230 V R7S ¹⁾	750.00 W	230 V	750.00 W	1.00	2900 K	100	0.0 s	0.00 s	12.0 mm	185.7 mm	2000 h

Product description	Rated lamp life time	Number of switching cycles	Lumen main. fact. at end of nom. life time	Additional product data			Capabilities		Certificates & standards
				Base (standard designation)	Mercury content	Mercury-free	Burning position	Dimmable	Energy efficiency class
HALOLINE 750 W 230 V R7S ¹⁾	2000 h	50000	0.80	R7s	0.0 mg	Yes	p15	Yes	C

Product description	Energy consumption	Country specific categorizations	
		ILCOS	
HALOLINE 750 W 230 V R7S ¹⁾	750 kWh/1000h	HDG-750-230-R7s-191,1	

¹⁾ Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

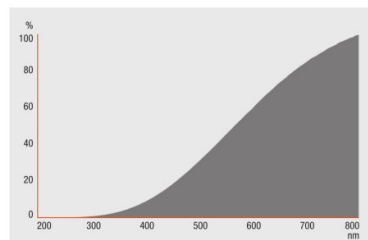

Product family datasheet

HALOLINE 750 W 230 V R7S

HALOLINE 750 W 230 V R7S

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300004167	HALOLINE 750 W 230 V R7S	Shipping carton box 12	245 mm x 85 mm x 112 mm	2.33 dm ³	353.40 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product family datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.