

PRODUCT CATALOGUE

MI/DJ PAGE 2



PRODUCT CATALOGUE

PRO PAGE 178



PRODUCT **CATALOGUE** MI/DJ





Cameo® is a brand of the Adam Hall Group.



ADAM HALL GROUP BRANDS



DISTRIBUTION BRANDS



Here at **Cameo®**, our mission is to make smart, innovative and high-quality lighting technology accessible to a wide audience. Because all of our products are developed in Germany at our headquarters near Frankfurt am Main, we are able to respond quickly and spontaneously to the wishes and suggestions of our customers. In this way, we can be confident that all of the passion invested into our products will ensure that they consistently meet the current and future requirements of our customers. Functionality and design go hand-in-hand during development, and this enables us to be one hundred percent behind each of our products.

cameolight.com

Cameo® is a brand of the Adam Hall Group.



facebook.com/cameolightandsound
youtube.com/cameolightandsound
blog.adamhall.com







TABLE OF **CONTENT**

CONTROLLERS	7
LED MOVING HEADS	13
PIXEL MAPPING	27
THEATRE SPOTLIGHTS	31
LED STANDARD PAR CANS.....	37
LED FLAT PARS	49
LED STUDIO PARS	61
LED OUTDOOR FIXTURES	79
LED BARS	83
LASERS.....	91
LED STROBES	99
LED LIGHT EFFECTS.....	107
LED SCANNERS	127
LED LIGHT SETS	135
FOG MACHINES	149
ACCESSORIES	155
LASER ACCESSORIES.....	163
ICON LEGENDS.....	166
REGISTER.....	170




CONTROLLERS

Cameo offers a selection of hardware and software for convenient remote control of DMX fixtures and intelligent lighting systems in live and installed applications.

Our **DVC4 USB-to-DMX interface** and the **free D4 software package for Windows and macOS** provide a fully featured solution that turns your computer into a customizable controller to create light shows with real-time visualization and live editing. Pre-programmed shows can be stored and run directly from the DMX interface in standalone Mode.

Compact, easily portable and intuitive to operate Cameo lighting desks are perfect for DJs, clubs, bars and small to medium lighting rigs. **The 54-Channel Control 54** handles up to nine fixtures or fixture groups and comes with direct access buttons for a variety of colours, functions and Modes while the entry level **Control 6 features** six Channel Faders and an overall master. For hands-free operation the range includes a rugged 4-switch foot controller with bright LED indicators.

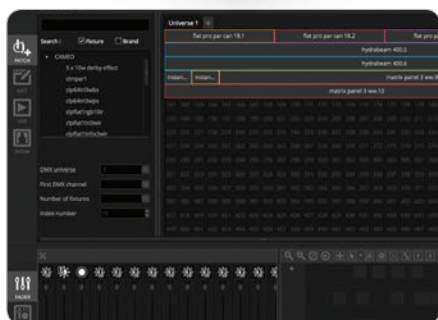

DVC 4

512-CHANNEL DMX INTERFACE AND CONTROL SOFTWARE PACKAGE

FEATURES

- ▶ Built-in flash memory for 256 DMX channels in Standalone Mode
- ▶ User friendly and intuitive Cameo DMX lighting software package by Daslight running on Windows and macOS for free download
- ▶ Software includes more than 15,000 fixture libraries, or create your own using the integrated ScanLibrary editor
- ▶ Create hundreds of amazing pixel and video effects plus moving head and scanner positions with the powerful XEEL engine
- ▶ Trigger scenes and control levels with a multi-touch screen, iOS / Android or MIDI/DMX controller
- ▶ Synchronize your show with the BPM or pulse of the music via the included audio analyzer or MIDI clock
- ▶ Design your show and pre-render your lighting effects with the real-time 3D visualization tool



SPECIFICATIONS

Product Number:	CLDVC4
Product Type:	USB To DMX Interface
Live Channels:	512
Standalone Channels:	256
Software Mode:	Full Cameo D 4 / Full Daslight DVC 4
Inputs:	Mini USB
Outputs:	XLR 3-Pin Female
Memory:	20 K

Dry Contact Ports:	8
Operating Voltage:	USB
Width:	78 mm
Height:	27 mm
Depth:	88 mm
Accessories (included):	USB to Mini USB cable
Weight:	0.2 kg



CONTROL 54

54-CHANNEL DMX CONTROLLER

- ▶ 54-Channel DMX controller
- ▶ For up to 9 fixtures or fixture groups
- ▶ Compatible with all RGB, RGBW, RGBWA and RGBWA+UV fixtures
- ▶ 6 smooth faders for Red, Green, Blue, White, Amber and UV intensity control
- ▶ 9 colour presets with direct-access buttons
- ▶ Direct access to Auto or Manual Modes, Blackout, Colour Jump, Colour Fade, Strobe and Sound Activation with sensitivity control
- ▶ Powered by included adapter or 9 V battery
- ▶ Ideal for DJs, nightclubs, lounges, bars etc.



SPECIFICATIONS

Product Number:	CLCONTROL54
Product Type:	DMX Mixers
Number Of DMX Channels	54
Control:	USITT DMX 512 Protocol
Features:	Auto Mode, Blackout, Colour Jump, Colour Macros, Manual Control, Stroboscope, Colour Fade, Music Control
DMX Output:	XLR 3-Pin Female
Controls:	22 Control Buttons, 6x Channel Faders, Controller For Microphone Sensitivity, On / Off Switch

Indicators:	LC Display
Operating Voltage:	External Power Supply, 9 V Block, 9 - 12 V DC
Colour:	Grey
Material	Metal
Width:	316 mm
Height:	63 mm
Depth:	140 mm
Accessories (included):	9 V Block, Power Supply
Weight:	1.5 kg



CONTROL 6

6-CHANNEL DMX CONTROLLER

- ▶ 6-Channel DMX controller
- ▶ Battery operation possible
- ▶ External Power Supply included
- ▶ Rugged metal housing



SPECIFICATIONS

Product Number:	CLCONTROL6
Product Type:	DMX Mixers
Number Of DMX Channels:	6
DMX Output:	XLR 3-Pin Female
Controls:	Master Fader, 6x Channel Faders
Indicators:	Power LED

Operating Voltage:	9 V Block, External Power Supply, 9 - 12 V DC
Width:	167 mm
Height:	56 mm
Depth:	134 mm
Accessories (Included):	9 V block, Power Supply, AC Adapter
Weight:	1 kg




LED MOVING HEADS

The LED moving head is a multifunctional headlight which can be freely adjusted. If you need a headlight that can be shifted around every axis and has an integrated colour changing system – here it is. It is also equipped with a variety of gobos to project creative patterns. Whatever amount of light is needed, with an LED moving head the light emission can be adjusted with a shutter or dimmer. Shine a light at discotheques, concerts, TV productions, theatres, or fashion events – the LED moving head can be used virtually everywhere where professional lighting is used.

Featuring

OSRAM

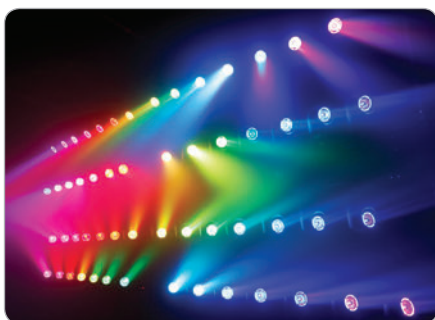

Unlimited
pan & tilt
rotation

MOVO® BEAM 100

UNLIMITED ROTATION BEAM MOVING HEAD WITH LED RING

FEATURES

- ▶ Ultra-bright 60 W Osram RGBW LED for saturated primary colours, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED surround with single pixel control
- ▶ 2 high-speed motors for ultra-fast continuous pan and tilt
- ▶ Fantastic automated Modes
- ▶ 4 selectable dimming curves
- ▶ 3 DMX Modes and standalone, master or slave operation
- ▶ 2.5" TFT display and touch sensitive buttons for intuitive configuration
- ▶ Omega Mounting bracket included



SPECIFICATIONS

Product Number:	CLMB100
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	60 W OSRAM (Approx. 50.000 operating hours)
Refresh Rate:	1,000 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 15-Channel
DMX Functions:	Auto Programs, Colour Ring Macro Speed, Dimmer Fine, PAN, PAN Unlimited Rotation, Pan/ Tilt Fine, PAN/ TILT Macros, Pan/ Tilt Speed, RGBW, Stroboscope, TILT, TILT Unlimited Rotation, Colour Fade, Colour Jump, Colour Macro, Colour Ring Macro, Dimmer, Dimmer Colour Ring, Dimmer Curve, RGB Ring 1-4, Strobe Colour Ring

PAN / TILT Movement:	Unlimited 540° / 270°
Standalone Modes:	Static Mode, Auto Programs
Controls:	Enter, Value Up, Mode, Value Down
Indicators:	2.5" TFT display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	130 W
Power Connector:	Blue and White Power I/O
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	157,000 lx @ 1m
Luminous Flux:	1,480 lm
Dimensions (W x H x D):	210 x 299 x 210mm
Weight:	5.2 kg

Featuring

OSRAM



MOVO® BEAM Z 100

NEW

UNLIMITED ROTATION BEAM MOVING HEAD
WITH LED RING AND ZOOM

FEATURES

- ▶ Ultra-bright 60 W OSRAM RGBW LED for saturated primary colours, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED ring with single pixel control
- ▶ 2 high-speed, high torque motors for ultra-fast unlimited pan and tilt
- ▶ Motor zoom with 4° to 30° range
- ▶ Spectacular automated modes
- ▶ 4 selectable dimming curves
- ▶ 3 DMX modes, standalone or master/slave operation
- ▶ 2.5" TFT display and touch panel for intuitive configuration
- ▶ Omega mounting bracket included



SPECIFICATIONS

Product Number:	CLMBZ100
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	60 W OSRAM (Approx. 50.000 operating hours)
Refresh Rate:	1,000 Hz
Dispersion:	4 - 30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	16-channel, 5-channel, 36-channel
DMX Functions:	PAN, colour jump, Colour Ring Macro Speed, Pan/Tilt Speed, Zoom, colour fade, Pan/Tilt Macros, TILT UNLIMITED ROTATION, auto programs, Pan/Tilt fine, TILT, PAN UNLIMITED ROTATION, Stroboscope, Dimmer Fine, Strobe Colour Ring, Dimmer Curve, RGBW, Colour Ring Macro, Dimmer Colour Ring, RGB Ring 1-4, colour macro

PAN / TILT Movement:	Unlimited
Standalone Modes:	Static Mode, Auto Programs
Controls:	Enter, Value Up, Mode, Value Down
Indicators:	2.5" TFT display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	140 W
Power Connector:	Blue and White Power I/O
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	8500 lx @ 3 m
Luminous Flux:	1,220 lm
Dimensions (W x H x D):	210 x 299 x 210mm
Weight:	6.5 kg

Featuring



CREE 
LEDs

HYDRABEAM 100 RGBW

ULTRA-FAST MOVINGHEAD
WITH 10 W CREE RGBW LED



- ▶ Compact ultra-fast moving head
- ▶ Powerful 10 W Cree RGBW LED
- ▶ 5 Modes of DMX control
- ▶ Standalone, master and slave capability
- ▶ 4 effective automated operating Modes
- ▶ Built-in microphone for sound activation
- ▶ 4-button LED Display for easy menu navigation and setting

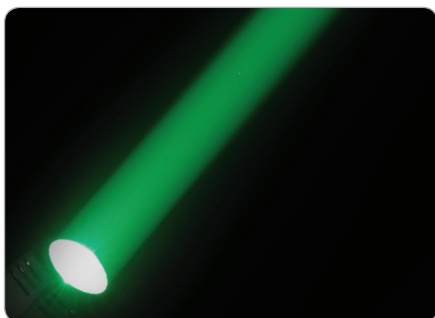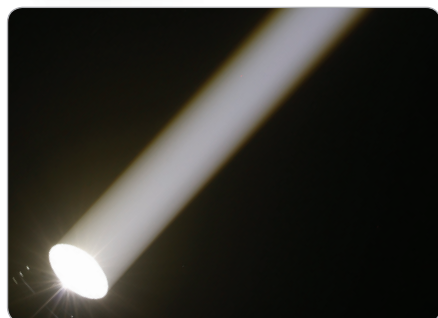

SPECIFICATIONS

Product Number:	CLHB100RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	10 W
Dispersion:	4.5 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3, 6, 9, 12, 14-Channel
DMX Functions:	Dimmer, Strobe, TILT, Colour Change, PAN
PAN / TILT Movement:	540° / 270°
High Speed Strobe:	20 Hz

Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	20 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	blue 4,100 lx @ 1 m, green 27,000 lx @ 1 m, red 7,000 lx @ 1 m
Dimensions (W x H x D):	100 x 240 x 160 mm
Weight:	1 kg

Featuring

CREE 
LEDs


AVAILABLE WITH COLD-WHITE
LED AND RGBW LED

HYDRABEAM 300 W / 300 RGBW

LIGHTING SYSTEM WITH
3 ULTRA-FAST 10 W CREE
RGBW QUAD LED MOVING HEADS





- ▶ Triangular moving head fixture
- ▶ 3 individually controllable ultra fast heads
- ▶ Ultra bright white 10 W Lumi-Engin LEDs / 10W high power Cree RGBW Quad-LEDs
- ▶ Universal mounting options
- ▶ Omega bracket and detachable Pole mount included
- ▶ 16 effective automated operating Modes
- ▶ 5 DMX Modes
- ▶ 4-button LED Display for easy manual control

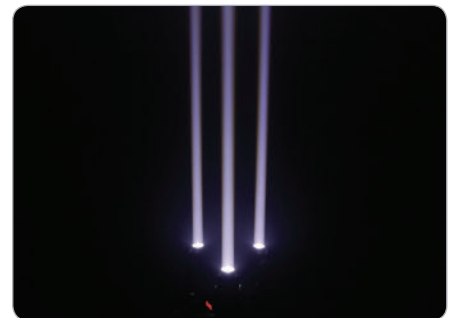

SPECIFICATIONS

Product Number:	CLHB300W / CLHB300RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	White / RGBW
Number Of LEDs:	3
LED Type:	10 W
Dispersion:	4.5 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6, 10, 12, 22, 27-Channel / 6, 10, 16, 26, 36-Channel
DMX Functions:	Dimmer, Colour Change, TILT, Strobe, PAN
PAN/TILT Movement:	540° / 270°
High Speed Strobe:	20Hz

Standalone Modes:	Sound Control, Auto Run
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	60 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	92,000 lx @ 1 m / R=9,600 lx @ 1 m, G=22,400 lx @ 1 m, B=4,650 lx @ 1 m, W=w31,000 lx @ 1 m
Dimensions (W x H x L):	380 x 240 x 380 mm
Weight:	5.5 kg

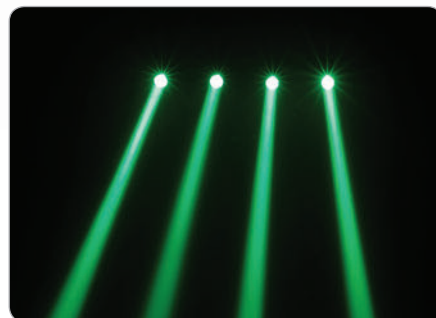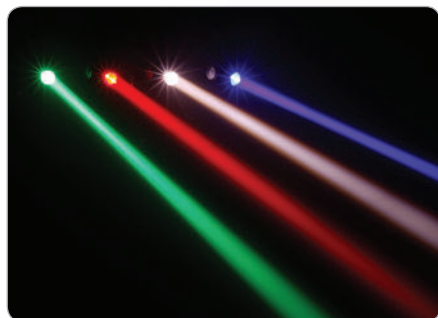

HYDRABEAM 4000 RGBW

NEW

LIGHTING SYSTEM WITH 4 ULTRA-FAST 32 W RGBW
QUAD LED MOVING HEADS

FEATURES

- ▶ Lighting system with 4 individually controllable moving heads
- ▶ Ultra fast 540° pan and 270° tilt
- ▶ Powerful 32 W RGBW Quad LEDs
- ▶ Universal mounting options
- ▶ 2 Omega brackets and pole mount adapter included
- ▶ Blue and grey Power Twist plus 3 and 5-Pin DMX connectors
- ▶ Easy daisy chaining and power linking
- ▶ 5 DMX modes, sound activation and automatic operation
- ▶ 16 exciting auto-run programs
- ▶ 4-button LC colour display for intuitive configuration



SPECIFICATIONS

Product Number:	CLHB4000RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	4
Refresh rate:	6000 Hz
LED Type:	32 W
Dispersion:	2.5 °
DMX Input / Output:	XLR 3-pin male / female, XLR 5-pin male / female
RDM:	no
Protocols:	USITT DMX-512
DMX Mode:	6, 10, 19, 32, 56-Channel
DMX Functions:	Auto programs, Colour change, Dimmer, PAN, strobe, TILT
Wireless DMX:	no
PAN movement:	540
TILT movement:	270
High Speed Strobe:	1 - 20 Hz
Standalone modes:	Auto run, sound control

Controls:	Enter, LCD display, mode, Value Down, Value Up
Indicators:	colour LC display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	220 W
When 110V / 240 V, how many pcs can be connected:	3 / 5
Power connector:	blue Power Twist male
Power through connector:	grey Power Twist female
Max. output current:	11 A
Housing material:	ABS plastic, metal
Cabinet colour:	Black
Protection class IP:	IP20
Cooling:	low-noise fan
Illuminance:	blue 9600lx @ 1m, green 42400lx @ 1m, red 17900lx @ 1m, white 67200lx @ 1m
Maximum Ambient Temperature:	0 - 40° C
Dimensions (W x H x L):	1000 x 270 x 90 mm
Weight:	11.6 kg

AVAILABLE WITH COLD-WHITE
LED AND RGBW LED

Featuring

CREE 
LEDs

HYDRABEAM 400 W / 400 RGBW

LIGHTING SET WITH 4 ULTRA-FAST
10 W CREE QUAD LED MOVING HEADS

- ▶ Bar with 4 ultra-fast moving heads
- ▶ Each moving head can be controlled individually
- ▶ Powerful 10 W Cree RGBW or Cold White Quad LEDs
- ▶ Universal mounting options
- ▶ 2 Omega brackets and a removable tripod flange included
- ▶ 16 effective automated operating Modes
- ▶ Simple operation using the four buttons and LED Display



SPECIFICATIONS

Product Number:	CLHB400W / CLHB400RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	White / RGBW
Number Of LEDs:	4
LED Type:	10 W / 10 W Cree
Dispersion:	4.5 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6, 10, 15, 28-Channel / 6, 10, 19, 32-Channel
DMX Functions:	Dimmer, Colour Change, TILT, Strobe, PAN
PAN/TILT Movement:	540° / 540°
High Speed Strobe:	20Hz
Standalone Modes:	Sound Control, Auto Run

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	100 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	84,000 lx @ 1 m / red 10,670 lx @ 1 m, green 19,000 lx @ 1 m, blue 3,710 lx @ 1 m, white 27,600 lx @ 1 m
Dimensions (W x H x L):	810 x 250 x 130 mm
Weight:	7.5 kg

Featuring




CREE 
LEDs

NANO BEAM 300

1 x 30 W CREE LED RGBW
MINI MOVING HEAD
WITH UNLIMITED PAN INCL. IR-REMOTE



- ▶ Miniature moving head with Unlimited pan and 230° tilt
- ▶ 30 W Cree RGBW LED
- ▶ Tightly focused 4° beam
- ▶ 8 show presets
- ▶ Modes of DMX control plus master, slave and standalone applications
- ▶ Automatic and sound activation Modes
- ▶ Inverse pan and tilt Mode
- ▶ 4-button display for intuitive operation
- ▶ IR Remote Control included
- ▶ Omega bracket for easy mounting

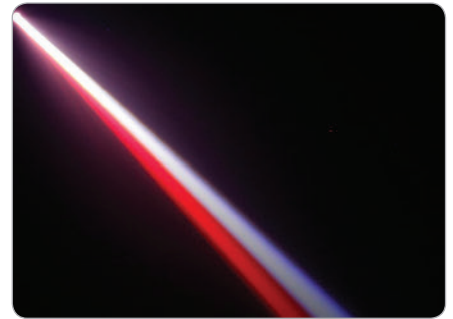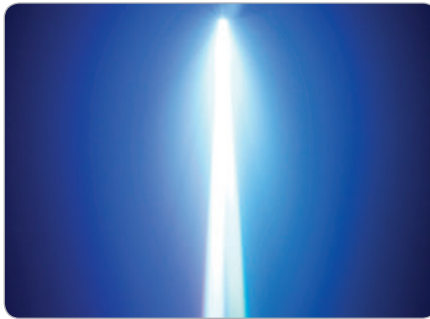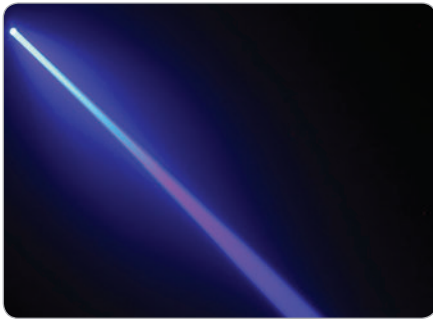

SPECIFICATIONS

Product Number:	CLNB300
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1x 4
LED Type:	30 W CREE (Approx. 50000 operating hours)
Dispersion:	4 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	7, 13, 11-Channel
DMX Functions:	Auto Programs, Colours, Pan/Tilt Fine, Sound Programs, Dimmer, Motor Speed, Pan/Tilt, Strobe
PAN/TILT Movement:	Unlimited / 230°
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Mode, Value Down, Enter, Value Up
Indicators:	LC Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	70 W
Power Connector:	IEC Power Connector Male
Housing Material:	ABS Plastic , Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	G=59,000 lx @ 1m, W=72,000 lx @ 1m, B=17,000 lx @ 1m, R= 27,500 lx @ 1m
Dimensions (W x H x L):	175 x 275 x 145 mm
Weight:	3 kg




NEW



NANO SPOT 300

LED MINI MOVING HEAD 30 W

- ▶ Miniature moving head with single 30W LED
- ▶ 540 x 230 pan and tilt
- ▶ Colour wheel with red, orange, yellow, green, blue, cyan and purple filters
- ▶ Gobo wheel with 7 gobos
- ▶ 7 lightshow presets
- ▶ Dimmer and strobe effects
- ▶ 3 DMX modes plus standalone, master and slave operation
- ▶ 4 function keys + display for manual control
- ▶ Built-in microphone for sound control
- ▶ IR remote control included
- ▶ Comes with omega bracket for multiple mounting options

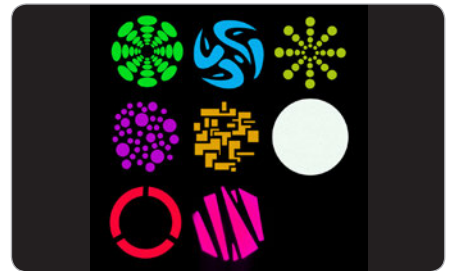

SPECIFICATIONS

Product Number:	CLNS300
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	White
Number Of LEDs:	1
LED Type:	30 W
Dispersion:	Beam 10° / Field 12 °
Number of gobos:	7 + open
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	5, 9, 11-Channel
DMX Functions:	Auto Programs , Colour Wheel , Dimmer , Gobo Wheel , Moving Speed , Pan/Tilt , Pan/Tilt Fine , Sound Programs , Strobe
PAN/TILT Movement:	540° / 230°

Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Fuse:	F2AL / 250 V
Power Connector:	IEC Power Input And Output
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	24500lx @ 1m
Luminous flux:	650 lm
Dimensions (W x H x L):	165 x 280 x 155 mm
Weight:	3 kg



PIXEL MAPPING

With dynamic single pixel control, Cameo's LED panels are a great choice for mapping alphabetic characters or numerals and an infinite variety of impressive lighting effects. The panels' smart interlocking systems enable secure, easy linking of multiple units to create large walls of vivid light.







MATRIX PANEL 3 WW

5 x 5 LED MATRIX PANEL
WITH SINGLE PIXEL CONTROL

- ▶ 5 x 5 LED Matrix Panel with single pixel control
- ▶ 25 x 3 W Warm White LEDs
- ▶ 4 DMX Modes, sound activation
- ▶ Master, slave and standalone capability
- ▶ Blinder, chase and Strobe effects
- ▶ Alphabetic character and numeral mapping
- ▶ 4 selectable dimming curves
- ▶ Noiseless and flicker-free operation
- ▶ Ultra flat enclosure
- ▶ Even more impressive in multiples

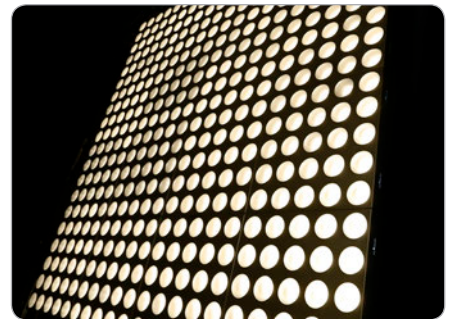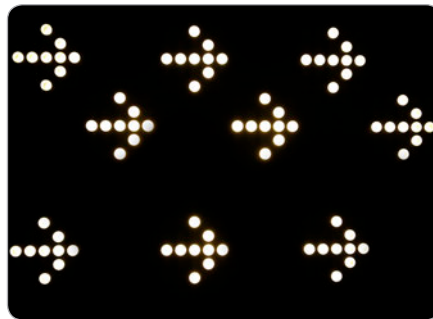

SPECIFICATIONS

Product Number:	CLMP3WW
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	Warm White
Colour Temperature:	3,300 K
Number Of LEDs:	25
LED Type:	3 W Single LED
Dispersion:	40 °
Refresh Rate:	3,400 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5, 10, 28-Channel
DMX Functions:	Dimmer Fine, Master Dimmer, Auto Programs, Sound Programs, Stroboscope
Standalone Modes:	Master / Slave Mode, Music Control
Controls:	Enter, Mode, Down, Up

Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Fuse:	F5A / 250V
Operating Temperature:	10 - 40 °C
Power Connector:	Blue and White Power I/O
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	6100 lx @ 1m
Features:	LED MATRIX PANEL, Swivel Bracket, 2 x Omega Mounting, Security Lock Slot
Dimensions (W x H x D):	580 x 580 x 67 mm
Weight:	8 kg



THEATRE SPOTLIGHTS

Designed especially for theatrical lighting, these fixtures are available with a choice of warm white or colourful RGBW LEDs. Cameo Theatre Spotlights feature precision plano-convex lenses, RDM capability and come with barn doors and a filter frame.



TS 40 WW / TS 40 WW WH

THEATRE SPOTLIGHT

WITH PC LENS AND 40 WATT WARM WHITE LED

FEATURES

- ▶ High-intensity warm white 40 W LED
- ▶ Plano-convex lens
- ▶ Continuously adjustable manual zoom with a beam angle of 14° to 38°
- ▶ RDM enabled
- ▶ 18,000 lux @ 1 m
- ▶ 3,200 K colour temperature
- ▶ CRI >90
- ▶ Flicker-free projection
- ▶ Rugged metal housing with convection cooling
- ▶ Includes rotatable wing limiter and colour filter frame



SPECIFICATIONS

Product Number:	CLTS40WW / CLTS40WWWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	Warm White
Number Of LEDs:	1
Colour Temperature:	3.200 K
CRI:	>90
LED Type:	Warm White 40 W / 60 W
Refresh Rate:	1,200 MHz / 3,600 MHz
Flash Rate Strobe:	1 - 20 Hz
Dispersion:	(Beam) 14° - 38° / (Field) 20° - 48°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	3-Channel
DMX Functions:	Dimmer, Dimmer Curve, Strobe
Wireless DMX:	No

Standalone Modes:	Static
Controls:	down, Enter, mode, up
Indicators:	LC Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Die Cast Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	18,000 lx @ 1 m
Luminous Flux:	1,570 lm
Operating Temperature:	0 - 40 °C
Dimensions (W x H x L):	145 x 205 x 240 mm
Weight:	3.6 kg
Accessories (included):	Barndoor



TS 60 W RGBW / TS 60 W RGBW WH

THEATRE SPOTLIGHT WITH PC LENS AND 60W RGBW LED

FEATURES

- ▶ High-intensity 60 W RGBW COB LED
- ▶ Plano-convex lens
- ▶ Continuously adjustable manual zoom with beam angle of 9° to 41°
- ▶ RDM enabled
- ▶ 19,800 lux @ 1 m
- ▶ Flicker-free projection
- ▶ Rugged metal housing
- ▶ Includes rotatable wing limiter and colour filter frame



SPECIFICATIONS

Product Number:	CLTS60WRGBW / CLTS60WRGBWWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	1
CRI:	90
LED Type:	60 W
Refresh Rate:	3,600 MHz
Flash Rate Strobe:	1 - 20 Hz
Dispersion:	(Beam) 9° - 41° / (Field) 16° - 49 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	5-Channel
DMX Functions:	Colour Macro, CTO, Dimmer, RGBW, Strobe
Wireless DMX:	No
Standalone Modes:	Auto Programs, Slave Mode, Sound Control, Static

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LC Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	65 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Die Cast Metal
Cabinet Colour:	Black / White
Cooling:	Temperature-controlled fan
Illuminance:	19,800 lx @ 1 m
Luminous Flux:	910 lm
Operating Temperature:	0 - 40 °C
Dimensions (W x H x L):	145 x 205 x 240 mm
Weight:	3.6 kg
Accessories (included):	Barndoor



LED STANDARD PAR CANS


The LED PAR, which is a headlight with an aluminium case, is right for everyone in need of headlights which are sturdy and run on little energy. PAR headlights have some kind of history. The first headlights of that type (PAR is the abbreviation for parabolic aluminium reflector) were sold in the 1950's. Nowadays, they are offered with light-emitting diodes (LEDs). You can adjust the intensity and colour of light with a digital multiplex (DMX), which is a common digital control program. The DMX is used in lighting to control dimmers, moving heads and many more.





PAR 64 CAN RGBWA+UV 10 WBS / WPS

12 x 10W 6-IN-1 LED RGBWA+UV PAR LIGHT
IN BLACK OR POLISHED HOUSING

- ▶ 12 x 10 W Ultra High Power 6 in 1 RGBWA+UV LEDs
- ▶ Highest flexibility for perfect mixing of solid and pastel colours to warm rich colours and ultra violet
- ▶ Flicker Free
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

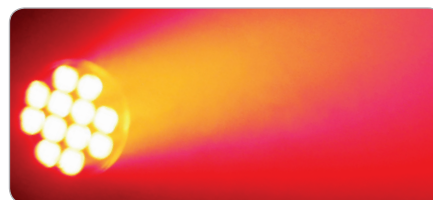

PHOTOMETRICAL DATA

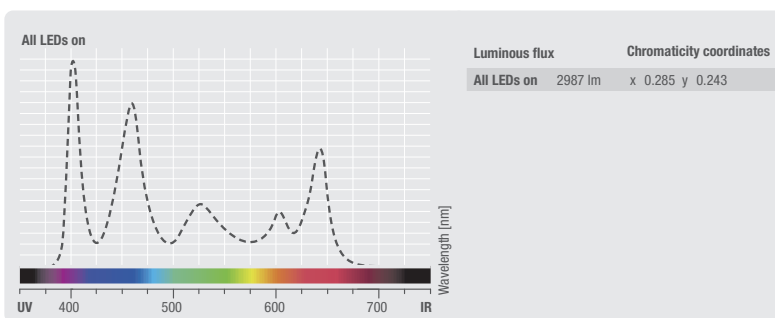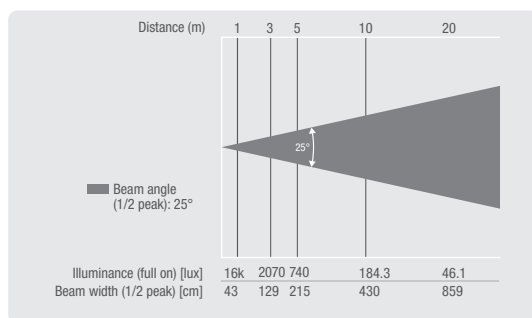

SPECIFICATIONS

Product Number:	CLP64RGBWAU10WBS / CLP64RGBWAU10WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBWA+UV
Number Of LEDs:	12
LED Type:	10 W 6 in 1 colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Ch-1, 3-Ch-2, 2, 6, 9-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBWA+UV, Sound Control, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Macro, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	Backlit LCD
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	120 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Illuminance:	16,000 lx @ 1m
Dimensions (W x H x L):	260 x 280 x 300 mm
Weight:	3.7 kg





PAR 64 CAN Q 8W BS / WPS

18 x 8W QUAD COLOUR LED RGBW
PAR LIGHT IN BLACK OR POLISHED
HOUSING

- ▶ 18 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



PHOTOMETRICAL DATA

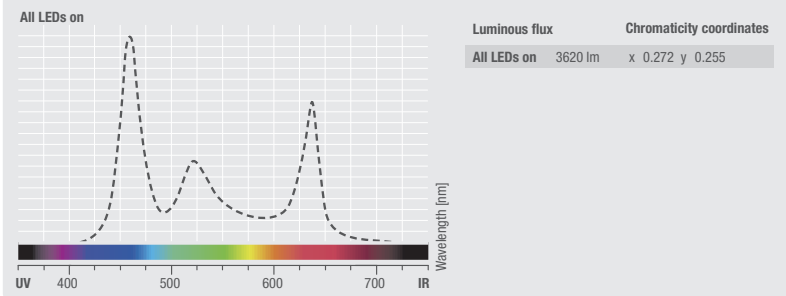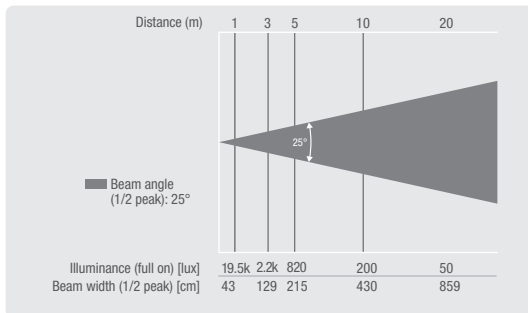

SPECIFICATIONS

Product Number:	CLP64Q8WBS / CLP64Q8WPS
Product Type:	Indoor, PAR64
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	18
LED Type:	8 W QUAD Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBW, Sound Control, Colour Jump, Strobe

Standalone Modes:	Colour Fade, Colour Jump, Slave Mode , Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	180 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Dimensions (W x H x L):	260 x 270 x 305 mm
Weight:	3.5 kg





PAR 56 Q 8 WBS / WPS

9 x 8 W QUAD COLOUR LED
RGBW PAR LIGHT IN BLACK
OR POLISHED HOUSING

- ▶ 9 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for perfect vibrant and pastel colours
- ▶ Operation via DMX, in Master/Slave Mode or as a single projector
- ▶ Built-in microphone for sound-control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double mounting bracket included in the delivery
- ▶ Rugged, compact aluminium housing



PHOTOMETRIC DATA

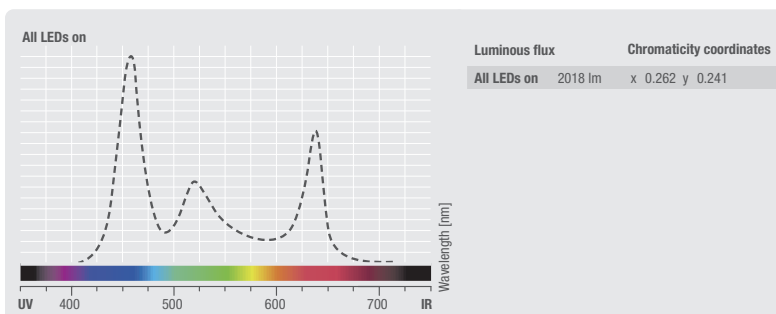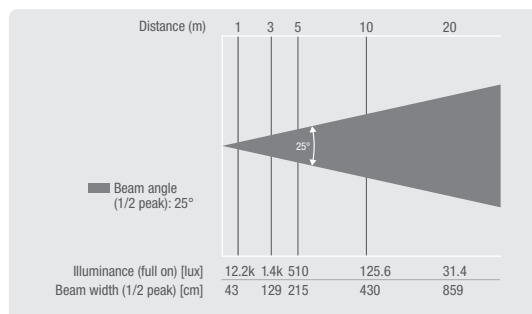

SPECIFICATIONS

Product Number:	CLP56Q8WBS / CLP56Q8WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	9
LED Type:	8 W QUAD Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Ch-1, 3-Ch-2, 2, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBW, Sound Control, Colour Macro, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Macro, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	75 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Large Low-Speed Fan
Illuminance:	12,200 lx @ 1m
Dimensions (W x H x L):	235 x 240 x 260 mm
Weight:	2.7 kg





PAR 64 CAN RGB 3W BS / WPS

36 x 3 W LED RGB PAR LIGHT
IN BLACK OR POLISHED HOUSING

- ▶ 36 x 3 W Ultra High Power RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



PHOTOMETRIC DATA

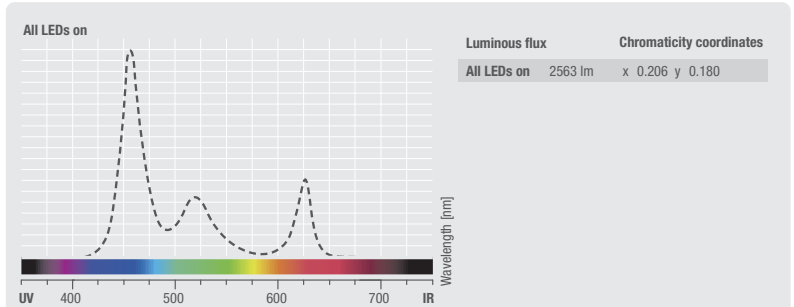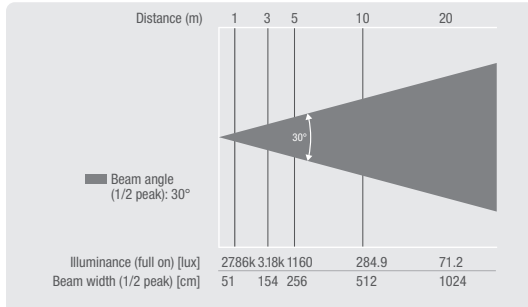

SPECIFICATIONS

Product Number:	CLP64RGB3WBS / CLP64RGB3WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	36
LED Type:	3 W
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Sound Control, Colour Jump, Strobe

Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	150 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Dimensions (W x H x L):	260 x 270 x 305 mm
Weight:	3.55 kg





PAR 64 CAN TRI 3W BS / WPS

18 x 3 W TRI COLOUR LED RGB
PAR LIGHT IN BLACK OR
POLISHED HOUSING

- ▶ 18 x 3 W High Power TRI RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



PHOTOMETRIC DATA

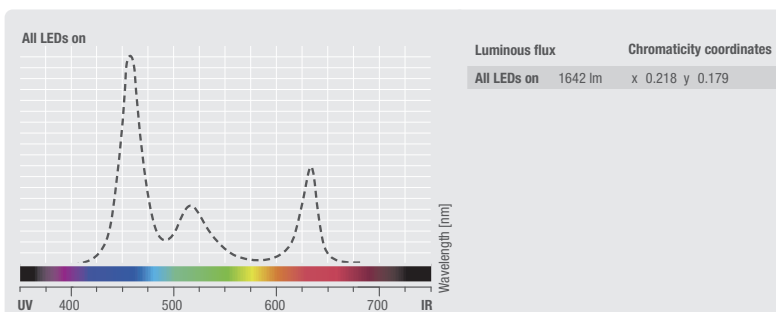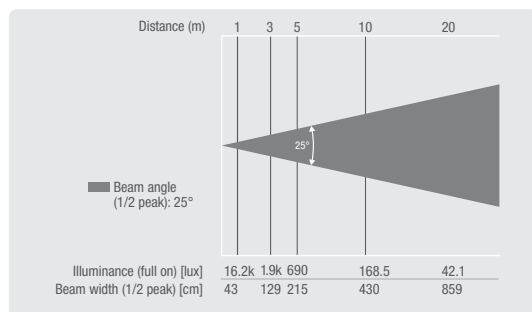

SPECIFICATIONS

Product Number:	CLP64TRI3WBS / CLP64TRI3WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	18
LED Type:	3 W TRI Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6 -Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	60 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Large Low-Speed Fan
Dimensions (W x H x L):	260 x 280 x 300 mm
Weight:	2.7 kg





PAR 56 CAN 3W BS / WPS

9 x 3 W TRI COLOUR LED RGB
PAR LIGHT IN BLACK OR
POLISHED HOUSING

- ▶ 9 x 3 W High Power RGB TRI LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



PHOTOMETRIC DATA

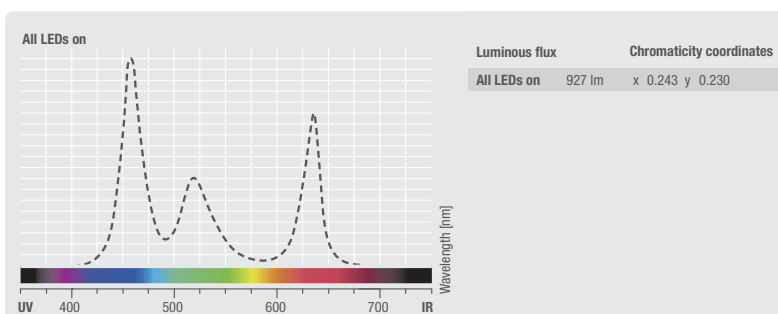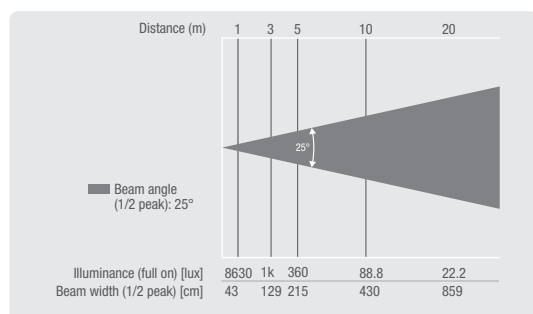

SPECIFICATIONS

Product Number:	CLP56TRI3WBS / CLP56TRI3WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	9
LED Type:	3 W TRI Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Strobe


Standalone Modes:	Colour Fade, Colour Change, Slave Mode, Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	40 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	230 x 250 x 260 mm
Weight:	2.7 kg





PAR 64 CAN RGBA 10 BS / PS

177 x 10 MM LED RGBA PAR LIGHT
IN BLACK OR POLISHED HOUSING

- ▶ Powerful 177 x 10 mm RGBA LEDs
- ▶ RGBA for warm, rich colour mixing
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

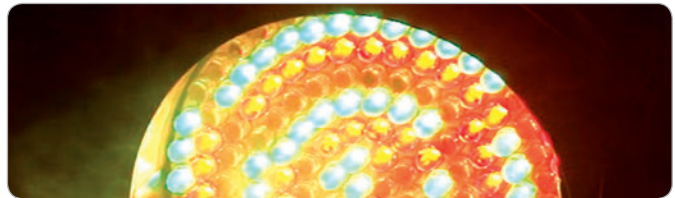

PHOTOMETRICAL DATA

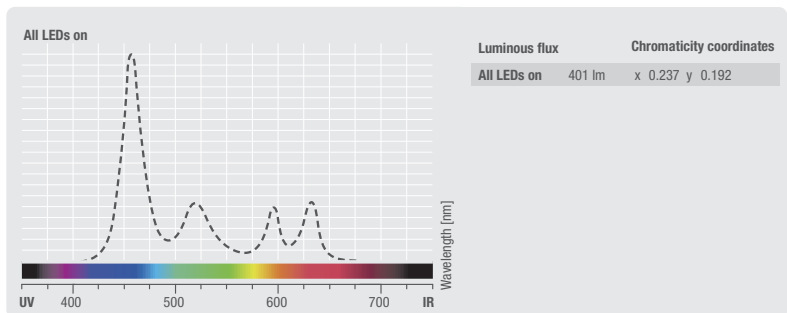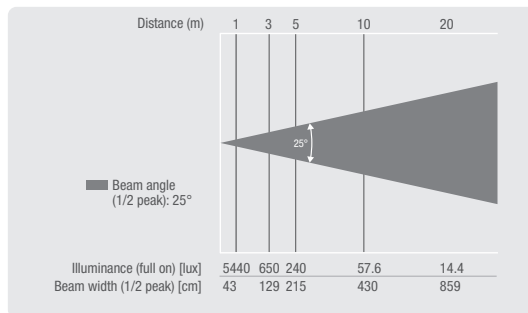

SPECIFICATIONS

Product Number:	CLP64RGBA10BS / CLP64RGBA10PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBA
Number Of LEDs:	177
LED Type:	10 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	7 -Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBA, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Slave Mode, Colour Change, Sound Control, Static Colour



Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	230 V AC
Power Consumption:	30 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	265 x 270 x 280 mm
Weight:	2.5 kg





PAR 64 CAN 10 BS / PS

183 x 10 MM LED RGB PAR LIGHT
IN BLACK OR POLISHED HOUSING

- ▶ Powerful 183 x 10 mm RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

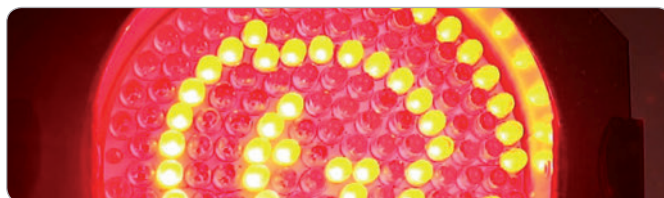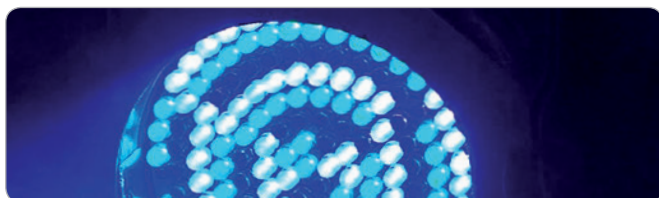

PHOTOMETRICAL DATA

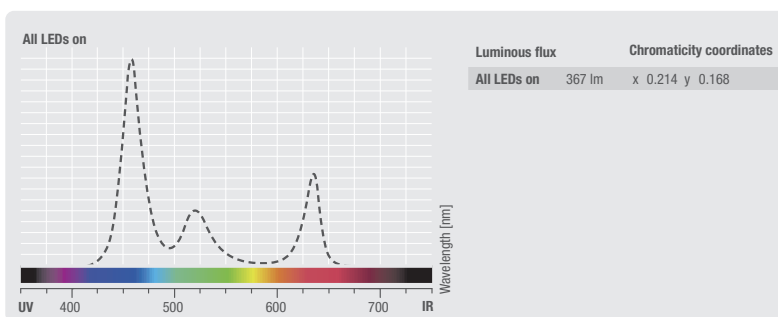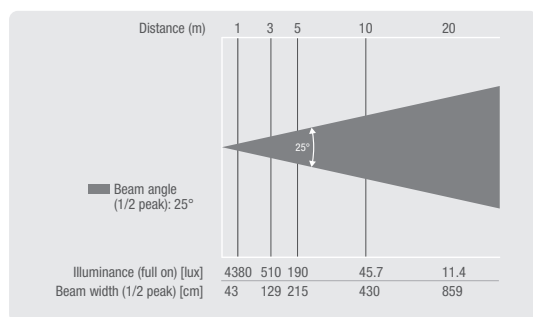

SPECIFICATIONS

Product Number: CLP64RGB10BS / CLP64RGB10PS

Product Type: LED PAR Lighting

Type: Indoor

Colour Spectrum: RGB

Number Of LEDs: 183

LED Type: 10 mm

Dispersion: 25 °

DMX Input / Output: XLR 3-Pin Male / XLR 3-Pin Female

DMX Mode: 4, 6-Channel

DMX Functions: Colour Fade, Master Dimmer, RGB, Colour Jump, Sound Control, Strobe

Standalone Modes: Colour Fade, Colour Change, Slave Mode, Sound Control, Static Colour

Controls: Mode, Value Up, Value Down

Indicators: LED Display

Operating Voltage: 230 V AC

Power Consumption: 30 W

Power Connector: Power Cord With Safety Plug (Type E / CEE 7/7)

Housing Material: Aluminium

Cabinet Colour: Black / Polished

Cooling: Convection

Dimensions (W x H x L): 265 x 270 x 280 mm


Weight: 2.3 kg





PAR 56 CAN RGB 10 BS / PS

108 x 10 MM LED RGB PAR LIGHT
IN BLACK OR POLISHED HOUSING

- ▶ 108 powerful 10mm RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

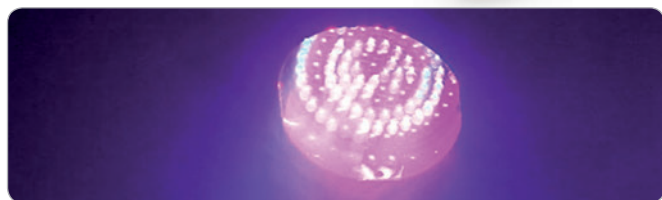

PHOTOMETRICAL DATA

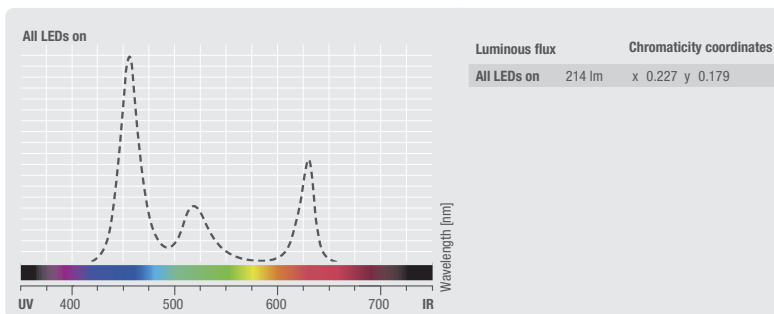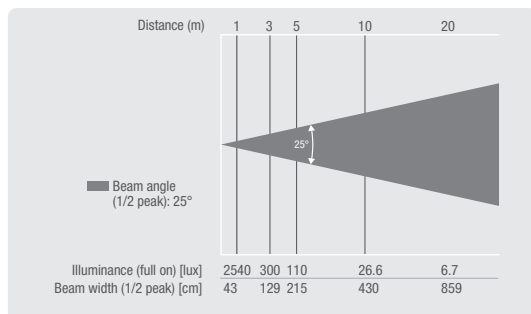

SPECIFICATIONS

Product Number:	CLP56RGB10BS / CLP56RGB10PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	108
LED Type:	10 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Sound Control, Strobe
Standalone Modes:	Colour Fade, Slave Mode, Colour Change, Sound Control, Slave Mode



Controls:	Mode, Value Up, Value Down
Indicators:	Program selection, LED Display
Operating Voltage:	230 V AC
Power Consumption:	20 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	230 x 250 x 260 mm
Weight:	1.7 kg





PAR 56 CAN RGB 05 BS / PS

151 x 5 MM LED RGB PAR LIGHT
IN BLACK OR POLISHED HOUSING

- ▶ 151 powerful RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED Display
- ▶ Rugged compact aluminum housing

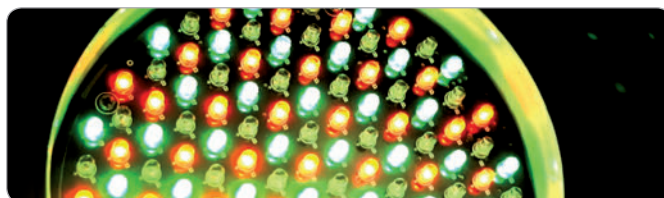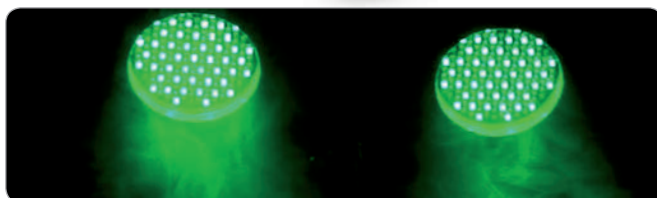


PHOTOMETRICAL DATA

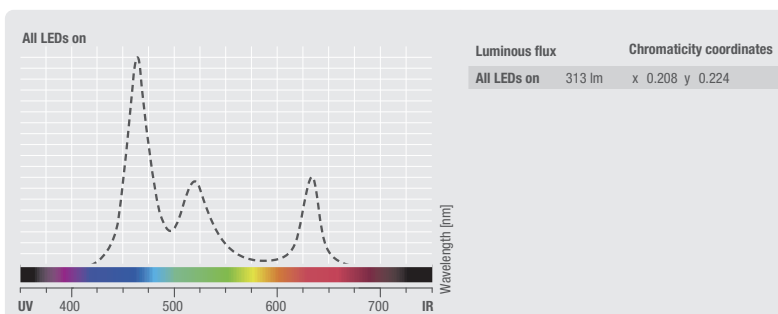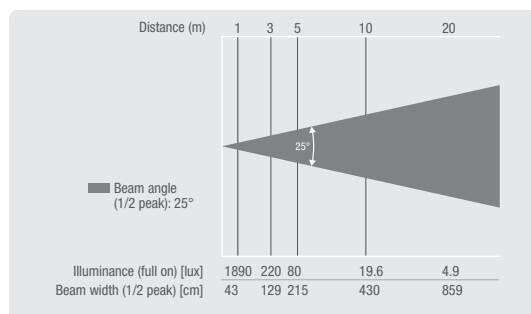

SPECIFICATIONS

Product Number:	CLP56RGB05BS / CLP56RGB05PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	151 (51 x Red, 49 x Green, 51 x Blue)
LED Type:	5 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Sound Control, Strobe

Standalone Modes:	Colour Fade, Colour Change, Slave Mode, Sound Control, Static Colour Mode, Value Up, Value Down
Controls:	LED Display
Indicators:	LED Display
Operating Voltage:	230 V AC
Power Consumption:	20 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	170 x 170 x 169 mm
Weight:	1.5 kg


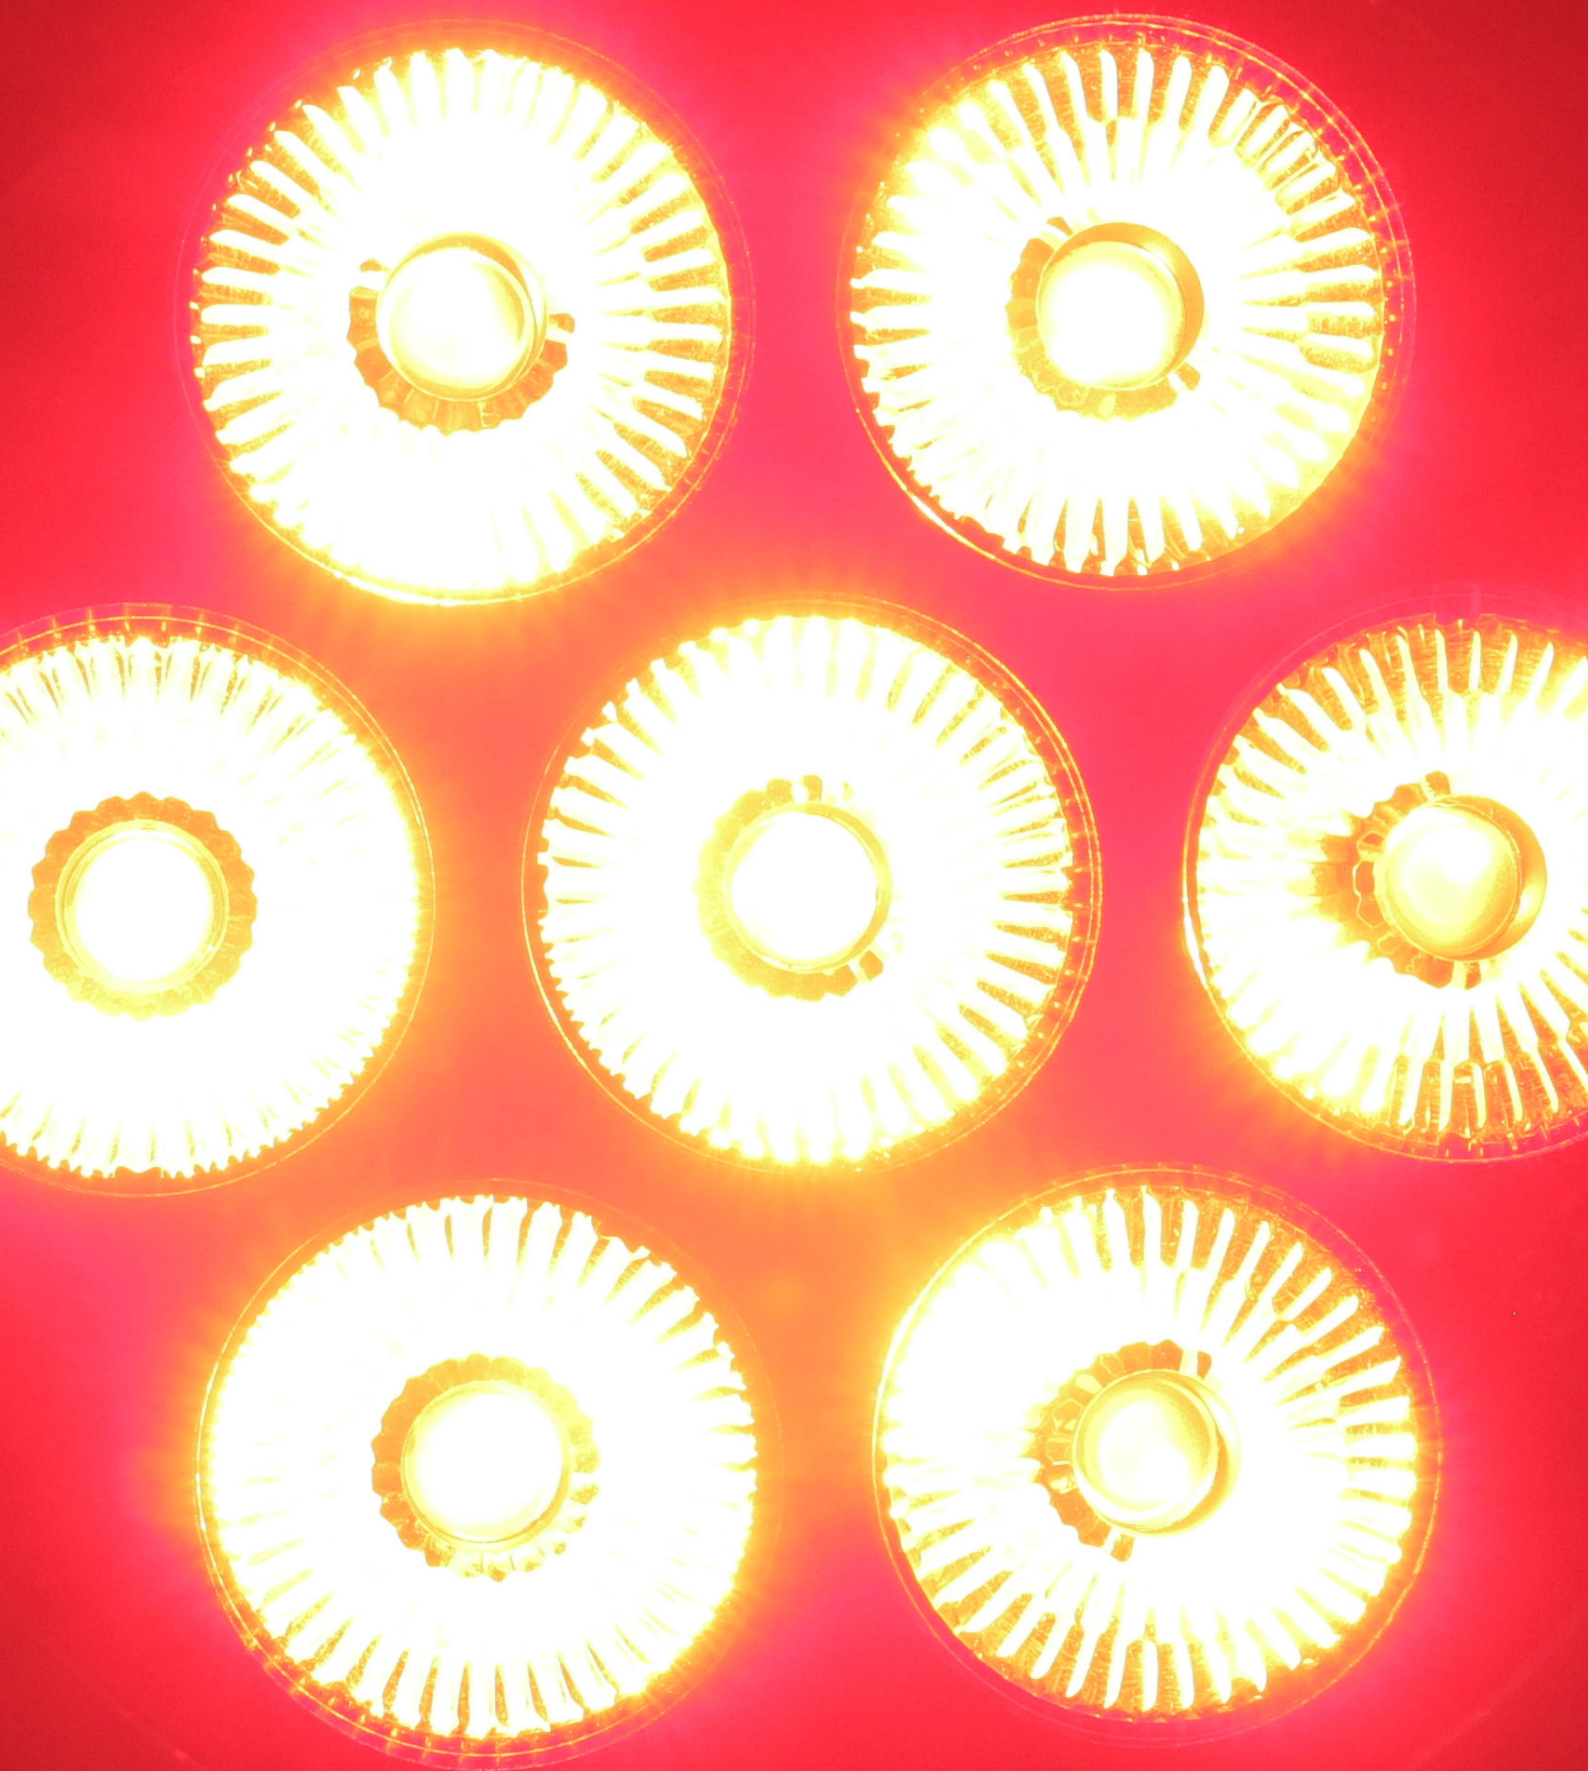


LED FLAT PARS

If you are used to the classic shape of PAR headlights, you will be surprised to find this version with slender design and low weight, easily to transport and flexibly to use. Compared with common light bulbs, the LED PAR Flat's LEDs are two to three times more efficient. They are extremely durable, they consume very little energy and therefore, they are the perfect choice. Discotheques, events, light shows – these are only some of the locations where LED PAR Flats are a typical choice. With an LED PAR Flat you will not be without light all of a sudden. After many years, their brightness might decrease, but you will probably not see the day when they finally go out. Another advantage of the LED PAR Flat is that they release very little heat.



Optional IR remote control

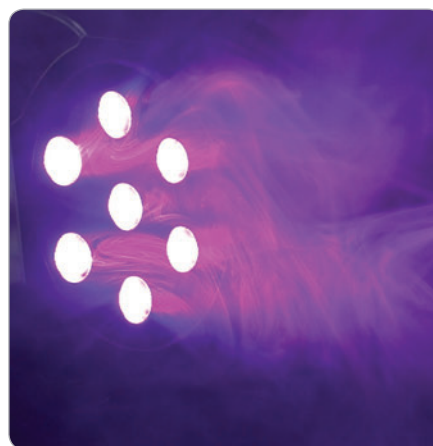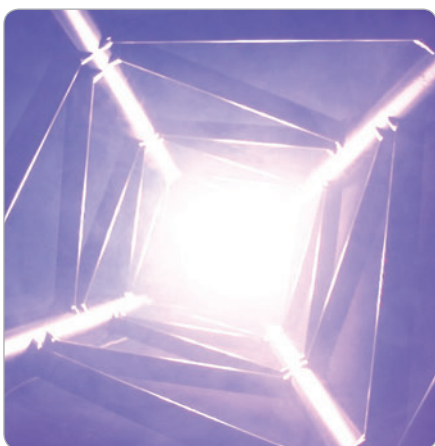



FLAT PAR 1 RGBW IR / WH

7 x 4 W HIGH-POWER FLAT RGBW LED PAR LIGHT
IN BLACK OR WHITE HOUSING WITH IR REMOTE CONTROL OPTION

FEATURES

- ▶ High-power 7 x 4 W quad-color LED Flat Par Can
- ▶ Superb RGBW colour mixing
- ▶ Lens optimized for uniform light intensity
- ▶ Infrared remote control option
- ▶ Low Power Consumption
- ▶ 6 DMX Modes, master, slave and standalone operation plus IR remote option
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ Built-in microphone for sound activation
- ▶ 4-button LED Display for intuitive configuration
- ▶ Flat, compact ABS housing
- ▶ Twin brackets included

PHOTOMETRICAL DATA

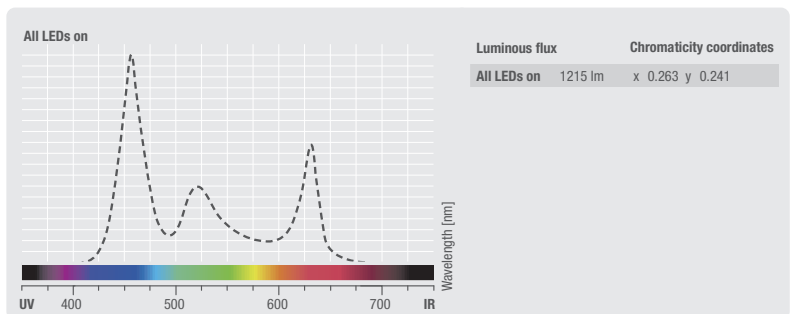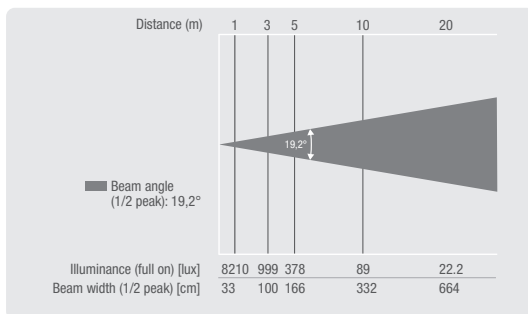

SPECIFICATIONS

Product Number: CLPFLAT1RGBWIR / CLPFLAT1RGBWIRWH

Product Type: LED PAR Lighting

Type: Indoor

Colour Spectrum: RGBW

Number Of LEDs: 7

LED Type: 4 W

Refresh Rate: 4,000 Hz

Dispersion: 19°

DMX Input / Output: XLR 3-Pin Male / XLR 3-Pin Female

DMX Mode: 2, 4, 8-Channel, 3 Ch-1, 3 Ch-2, 3 Ch-3

DMX Functions: Colour Fade, Master Dimmer, Strobe, Colour Jump, Colour Macro, RGBW, Sound Control

Standalone Modes: Colour Jump, Colour Macro, Colour Fade, Slave Mode, Sound Control, Static Colour, Strobe

Controls: Enter, Mode, Value Up, Value Down

Indicators: LED Display

Operating Voltage: 100 V AC - 240 V AC, 50 - 60 Hz

Power Consumption: 35 W

Power Connector: IEC Power Input And Output

Housing Material: ABS Plastic



Cabinet Colour: Black / White

Cooling: Convection

Illuminance: 8,200 lx @ 1m

Dimensions (W x H x L): 180 x 175 x 115 mm

Weight: 1.2 kg

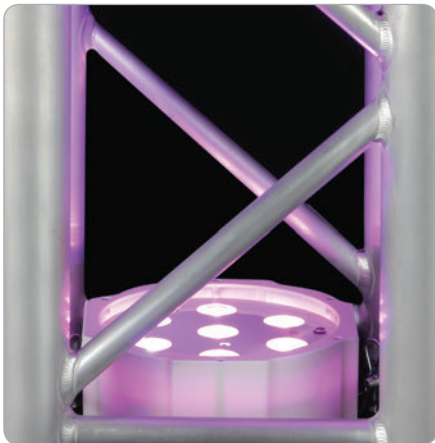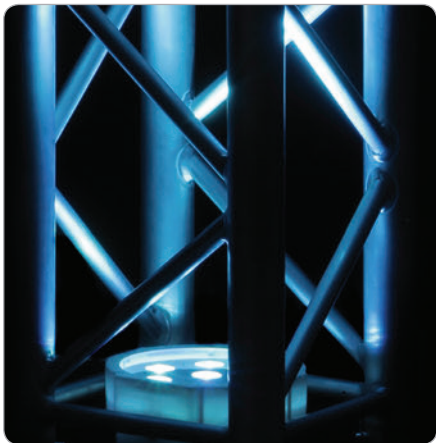

Also available as set in black or white



FLAT PAR CAN TRI 3W IR / WH

7 x 3 W HIGH POWER TRI COLOUR FLAT LED RGB
PAR LIGHT IN BLACK OR WHITE HOUSING

FEATURES

- ▶ With IR-remote control capability
- ▶ Low Power Consumption
- ▶ Power in / out for daisy chaining up to 10 units
- ▶ Operated via DMX, in master/slave Mode or standalone Mode or optional IR-remote
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Flat and compact ABS housing

PHOTOMETRICAL DATA

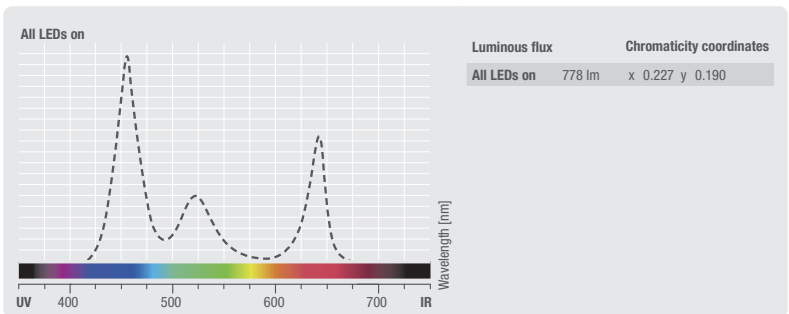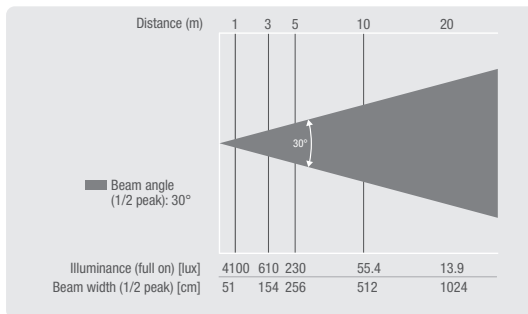

SPECIFICATIONS

Product Number: CLPFLAT1TRI3WIR / CLPFLAT1TRI3WIRWH

Product Type: LED PAR Lighting

Type: Indoor

Colour Spectrum: RGB

Number Of LEDs: 7

LED Type: 3 W TRI Colour

Dispersion: 30 °

DMX Input / Output: XLR 3-Pin Male / XLR 3-Pin Female

DMX Mode: 3 Ch-1, 3 Ch-2, 2, 6-Channel

DMX Functions: Colour Fade, Master Dimmer, Strobe, Colour Jump, RGBW, Sound Control

Standalone Modes: Colour Jump, Colour Macro, Colour Fade, Slave Mode, Sound Control, Static Colour

Controls: Enter, Mode, Value Up, Value Down

Indicators: LED Display

Operating Voltage: 100 V AC - 240 V AC, 50 - 60 Hz

Power Consumption: 25 W

Power Connector: IEC Power Connector Female / Male

Housing Material: ABS Plastic


Cabinet Colour: Black / White

Cooling: Convection



Illuminance: 4,100 lx @ 1m

Dimensions (W x H x L): 180 x 175 x 115 mm

Weight: 1.2 kg

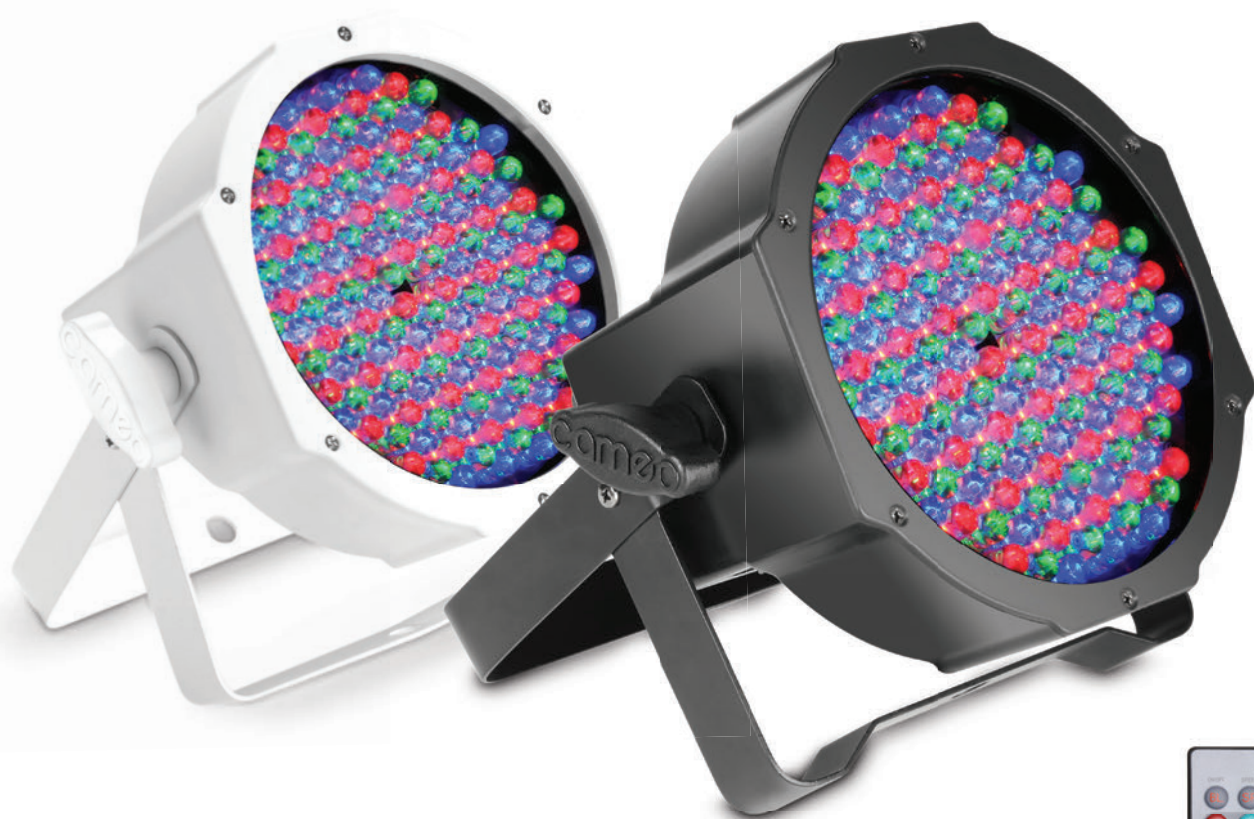

Optional IR remote control

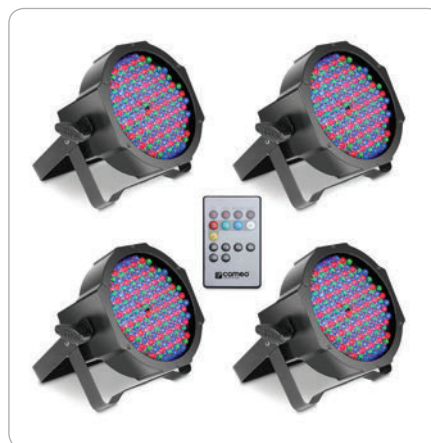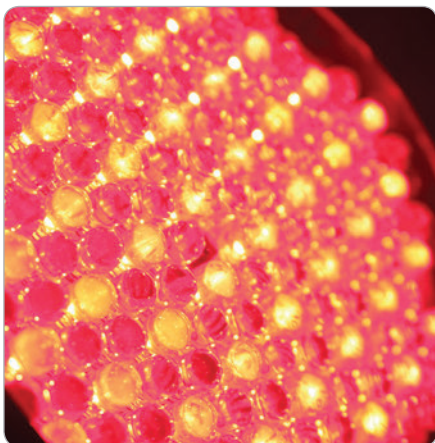

also available as set with IR remote



FLAT PAR CAN RGB 10 IR / WH

144 x 10 MM FLAT LED RGB PAR SPOT LIGHT
IN BLACK OR WHITE HOUSING WITH IR-REMOTE CONTROL CAPABILITY

FEATURES

- ▶ Extremely bright Spotlight in a flat and lightweight ABS housing
- ▶ Optional IR-Remote available (CLPFLAT1REMOTE)
- ▶ Very low Power Consumption
- ▶ Power in / out for daisy chaining up to 10 units

PHOTOMETRIC DATA

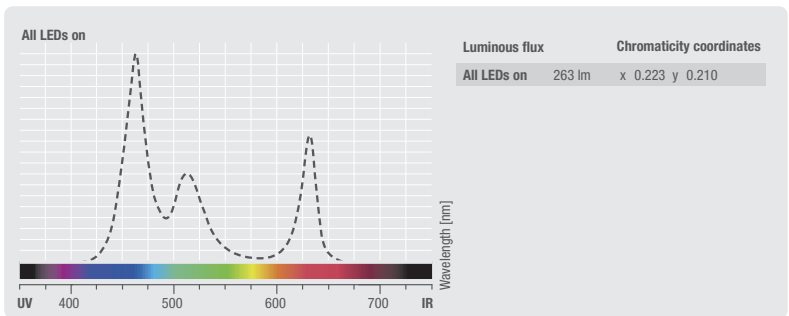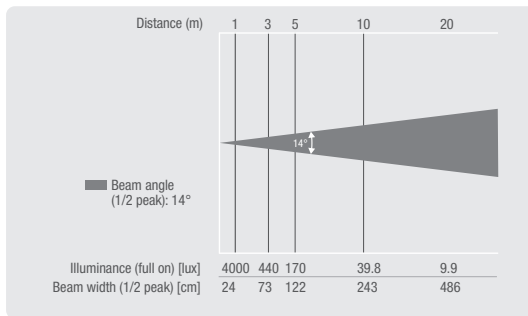

SPECIFICATIONS

Product Number: CLPFLAT1RGB10IR / CLPFLAT1RGB10IRSET1 / CLPFLAT1RGB10IRWH

Product Type: LED PAR Lighting

Type: Indoor

Colour Spectrum: RGB

Number Of LEDs: 144 (48 x Red, 48 x Green, 48 x Blue)

LED Type: 10 mm

Dispersion: 14 °

DMX Input / Output: XLR 3-Pin male / XLR 3-Pin Female

DMX Mode: 3 Ch-1, 3 Ch-2, 2, 6-Channel

DMX Functions: Colour Fade, Master Dimmer, Strobe, Colour Jump, RGB

Standalone Modes: Colour Jump, Colour Macro, Colour Fade, Slave Mode, Sound Control, Static Colour

Controls: Enter, Mode, Value Up, Value Down

Indicators: LED Display

Operating Voltage: 110 V AC - 240 V AC / 50 – 60 Hz

Power Consumption: 15 W

Power Connector: IEC Power Connector

Housing Material: ABS Plastic

Cabinet Colour: Black / White

Cooling: Convection

Illuminance: 4,000 lx @ 1m

Dimensions (W x H x L): 176 x 180 x 113 mm

Weight: 1.2 kg

Features: IR Remote Control Optional






Optional IR remote control





FLAT PAR CAN 7 x 3W UV IR / WH

7 x 3 W HIGH POWER FLAT
LED UV PAR LIGHT IN BLACK OR
WHITE HOUSING

- ▶ Infrared remote control capability
- ▶ Low Power Consumption
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ 3 DMX Modes, master, slave and standalone operation plus IR remote option
- ▶ 4-button LED Display for intuitive configuration
- ▶ Twin brackets included as standard
- ▶ Flat, compact ABS housing

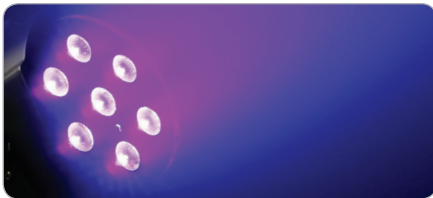

PHOTOMETRICAL DATA

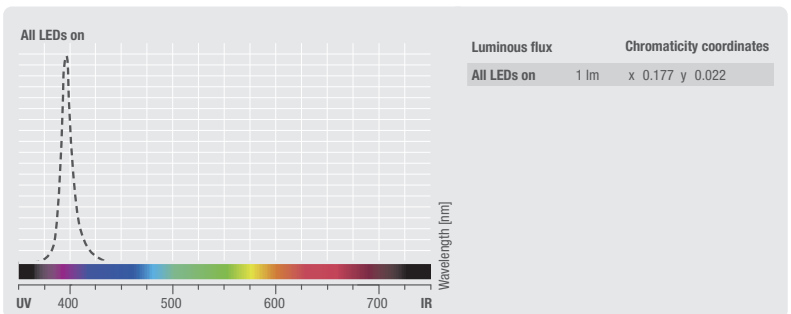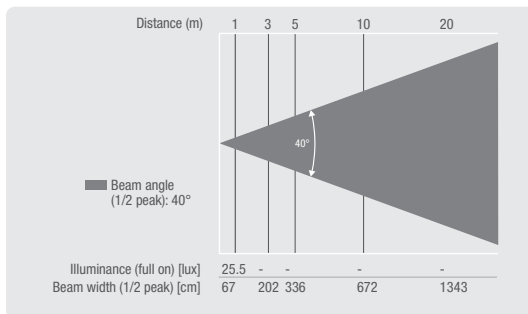

SPECIFICATIONS

Product Number:	CLPFLAT1UVIR / CLPFLAT1UVIRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	UV
Number Of LEDs:	7
LED Type:	3 W
Dispersion:	40 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 2, 3-Channel
DMX Functions:	Master Dimmer, Strobe

Standalone Modes:	Slave Mode, Static Colour, Colour Change, Strobe
Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	20 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Dimensions (W x H x L):	180 x 175 x 115 mm
Weight:	1.2 kg



Optional IR remote control



NEW

FLAT 1 TW IR / FLAT 1 TW IR WH

7 x 4 W HIGH-POWER FLAT TUNABLE WHITE LED PAR LIGHT
IN BLACK HOUSING WITH IR REMOTE CONTROL OPTION

FEATURES

- ▶ High-power 7 x 4 W tunable white LED flat PAR can
- ▶ White colour temperature variable from 3,400 - 7,000 K
- ▶ Lens optimized for uniform light intensity
- ▶ Dimming with 4 selectable curves and halogen lamp-like or LED response
- ▶ 20 Hz high-speed strobe
- ▶ 4 DMX, automatic and sound control modes plus optional IR remote
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ 4-button LED display for intuitive configuration
- ▶ Flat, compact ABS housing
- ▶ Low power consumption
- ▶ Twin brackets included



SPECIFICATIONS

Product Number:	CLPFLAT1TWIR / CLPFLAT1TWRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	Warm White/Cold White
Number Of LEDs:	7
LED Type:	4 W
Refresh rate:	3000Hz
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin male / XLR 3-Pin Female
DMX Mode:	2-channel, 1-channel, 7-channel, 3-channel
DMX Functions:	Dimmer, CW, Color Temperature (17 Presets), WW, strobe, Dimmer Response, Dimmer Curve (8 Presets)
Standalone Modes:	WW, strobe, CW, Color Temperature (17 Presets)

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 - 60 Hz
Power Consumption:	22 W
Power Connector:	IEC Power Connector
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	6,000 lx @ 1m
Dimensions (W x H x L):	175 x 180 x 115 mm
Weight:	1.2 kg
Features:	IR Remote Control Optional



LED STUDIO PAR CANS

The PAR lights thought further – that is the LED Studio PAR. LED PAR lights are extremely durable, consume very little energy and do not pollute the environment too much. Studios in which one part of the headlight is fixed are a common location for the LED Studio PAR. You can use them not only in photo studios or exhibitions - they are also the right choice for theatres and museums. The LED Studio PAR with a double bracket can also be used on the floor.





Q-SPOT 15 RGBW / WH

COMPACT SPOT LIGHT WITH 15W RGBW LED
IN BLACK OR WHITE HOUSING

FEATURES

- ▶ Compact LED spot light with single 15 watt quad LED
- ▶ 2 additional lenses for Beam Angles of 4.5°, 10° or 25°
- ▶ RDM capable
- ▶ 16-bit technology for high definition colours and ultra smooth dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour Temperature correction
- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 5 Modes of DMX control, sound activation plus master, slave and standalone capability
- ▶ Infrared remote control included
- ▶ 4-button OLED Display for easy configuration
- ▶ convection cooling for noise-free performance


PHOTOMETRICAL DATA

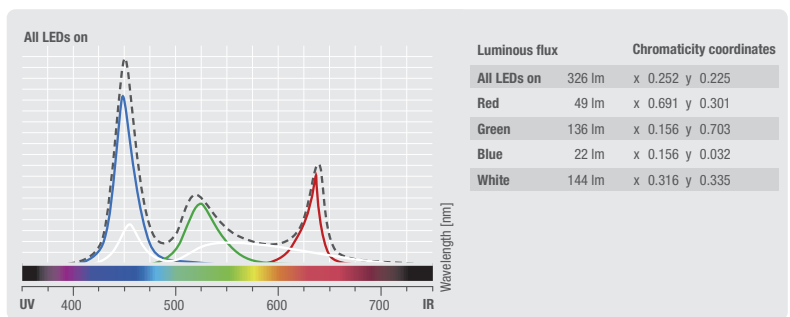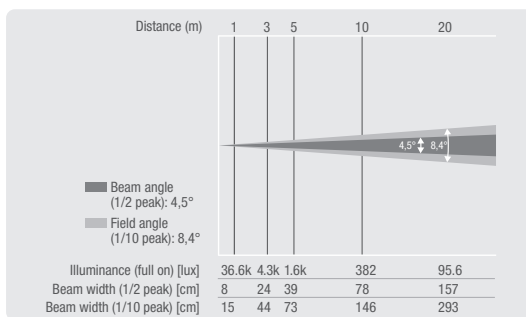

SPECIFICATIONS

Product Number:	CLQS15RGBW (Black) CLQS15RGBWWH (White)
Product Type:	LED PAR Lighting
Type:	Indoor, PAR56
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	15 W
Refresh Rate:	3,600 Hz
High Speed Strobe:	20 Hz
Dispersion:	10°, 25°, 4.5°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 9-Channel, 3 Ch-1, 3 Ch-2
DMX Functions:	Colour Macro, Master Dimmer, RGBW, Colour Jump, Sound Control, Strobe

Standalone Modes:	Slave Mode, Sound Control, Auto Run, Colour Fade, Colour Jump, Colour Macro
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	OLED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	18 W
Power Connector:	Blue and white power I / O
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	24,000 lx @ 1 m
Dimensions (W x H x L):	89 x 89 x 172 mm
Weight:	1.2 kg

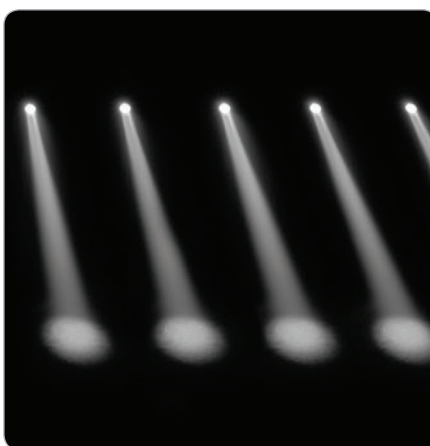



Q-SPOT 15 W / WH

COMPACT SPOT LIGHT WITH 15W WARM WHITE LED IN BLACK OR WHITE HOUSING

FEATURES

- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 3-Channel DMX control, sound activation plus master, slave and standalone capability
- ▶ 4-button OLED Display for easy configuration
- ▶ Convection cooling for noise-free performance
- ▶ Includes handheld for convenient infrared remote control
- ▶ Compact spot light with single high-power 15 watt Warm White LED
- ▶ 3 lenses for Beam Angles of 4.5°, 10° or 25°
- ▶ RDM capable
- ▶ 16-bit technology for ultra smooth dimming
- ▶ Flicker free, ideal for motion picture and TV applications

PHOTOMETRICAL DATA

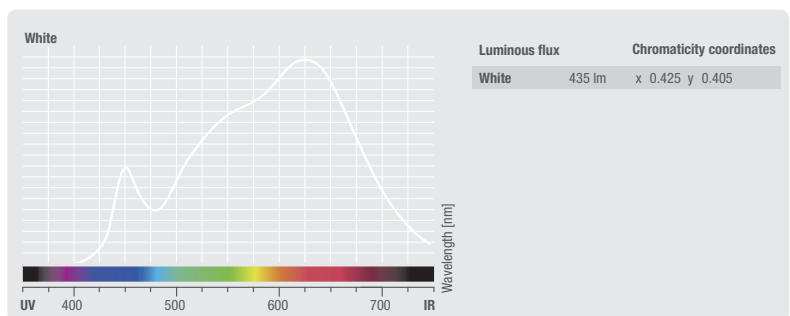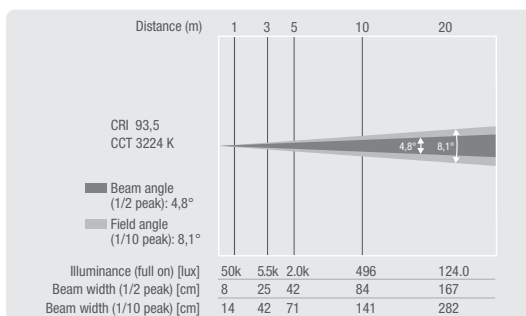

SPECIFICATIONS

Product Number:	CLQS15W (black) CLQS15WWH (White)
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	Warm White
Number Of LEDs:	1
LED Type:	15 W
Refresh Rate:	3,600 Hz
High Speed Strobe:	20 Hz
Dispersion:	4.5°, 25°, 10°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Channel
DMX Functions:	Master Dimmer, Sound Control, Strobe
Standalone Modes:	Master / Slave Mode, Sound Control

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	OLED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	18 W
Power Connector:	Blue and white power I / O
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	5,500 lx @ 1 m
Luminous Flux:	435 lm
CRI:	94
Dimensions (W x H x L):	89 x 89 x 172 mm
Weight:	1.2 kg



Optional IR remote control



Including two additional lenses for variable beam angles



NEW

Q-SPOT 40 RGBW

COMPACT SPOT LIGHT WITH 40W RGBW LED IN BLACK HOUSING

ALSO AVAILABLE
WITH WARM WHITE
OR COLD WHITE LED

FEATURES


- ▶ Compact spotlight with single 40W Osram quad LED
- ▶ Custom lens with 4.5° beam spread for uniform light intensity
- ▶ Includes 2 replacement lenses for 10° or 25° beamangles
- ▶ RDM enabled
- ▶ 16-bit technology for highdefinition colours and ultra smooth dimming
- ▶ Flickerfree, ideal for motion picture and TV applications
- ▶ Colour temperature correction
- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 5 modes of DMXcontrol, sound activation plus master, slave and standalone capability
- ▶ Infrared remote control available as accessory
- ▶ 4-button OLED display for easy configuration
- ▶ Convection cooling for noiseless performance



SPECIFICATIONS

Product Number:	CLQS40RGBW (RGBW LED - black Housing) CLQS40RGBWWH (RGBW LED - white Housing) CLQS40WW (Warm-White LED - black Housing) CLQS40WWWH (Warm-White LED - white Housing) CLQS40CW (Cold-White LED - black Housing) CLQS40CWWH (Cold-White LED - white Housing)
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	40 W
Refresh Rate:	3,600 Hz
High Speed Strobe:	1 - 20 Hz
Dispersion:	25°, 10°, 4.5°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-channel 1, 2-channel, 3-channel 2, 4- channel, 9-channel

DMX Functions:	Master dimmer, RGBW, sound control, strobe, colour jump, colour macro
Standalone Modes:	Auto run, slave mode, colour fade, colour jump, colour macro, sound control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	OLED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	55 W
Power Connector:	Blue Power Twist male
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	8900lx @ 3m, 58000lx @ 1m
Luminous Flux:	780 lm
Dimensions (W x H x L):	220 x 230 x 220 mm
Weight:	2,1 kg

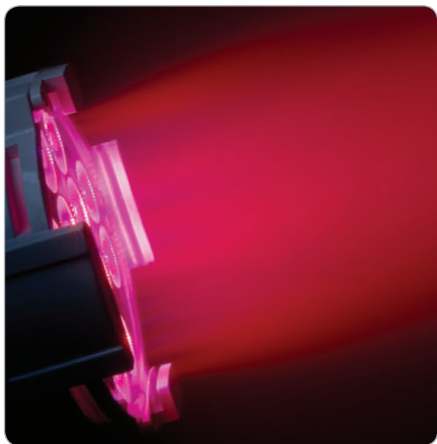



STUDIO PAR 64 CAN RGBWA + UV 12 W / WH

12 x 12W QUAD COLOUR LED RGBWA+UV
PAR LIGHT IN BLACK OR WHITE HOUSING

FEATURES

- ▶ 12 x 12 W Ultra High Power RGBWA+UV LEDs
- ▶ Highest flexibility for perfect mixing of solid and pastel colours to warm rich colours and ultra violet
- ▶ Flicker Free with a Refresh Rate of 3000Hz
- ▶ Operation via DMX, in Master/Slave Mode or as a single projector
- ▶ 5 DMX Modes for flexible operation
- ▶ Built-in microphone for sound-control Mode
- ▶ Simple to operate using the four buttons and LC-display
- ▶ Original Neutrik PowerCON In- and Outputs
- ▶ Sturdy metal housing with double brackets

PHOTOMETRICAL DATA

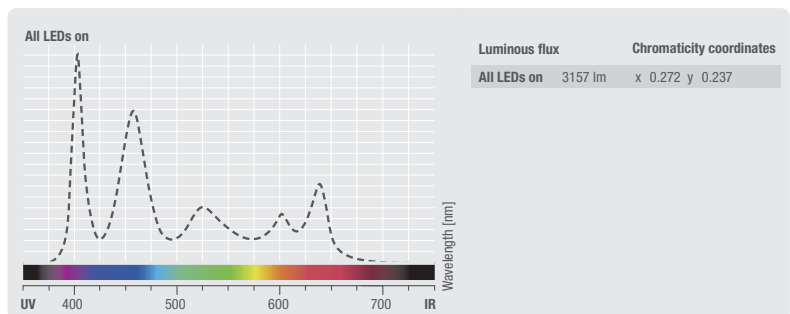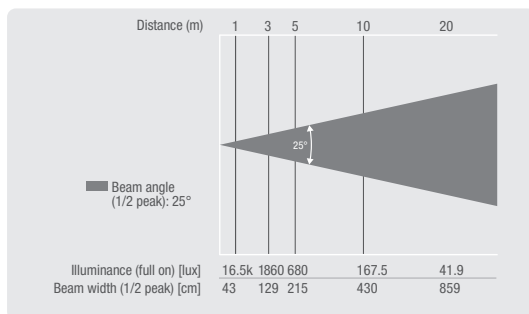

SPECIFICATIONS

Product Number:	CLPST64RGBWAU12W / CLPST64RGBWAU12WWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBWA+UV
Number Of LEDs:	12
LED Type:	12 W 6 in 1 colour
Refresh Rate:	3,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6, 9-Channel
DMX Functions:	Colour Fade, Colour Jump, Strobe, RGBW+UV, Sound Control
Standalone Modes:	Colour Macro, Sound Control, Strobe, Colour Jump, Colour Fade, Slave Mode, Static Colour


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	Backlit LCD
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	110 W
Power Connector:	Neutrik PowerCON
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Fan
Fuse:	F2AL / 250 V
Dimensions (W x H x L):	130 x 220 x 255 mm (Dimensions without mounting bracket)
Weight:	4.9 kg
Features:	1m Power Cable With Neutrik PowerCON And Safety Plug Included, Double Bracket Included





STUDIO PAR 64 CAN Q 8W

18 x 8W QUAD COLOUR LED RGBW
PAR LIGHT IN BLACK HOUSING

- ▶ 18 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Sturdy metal housing

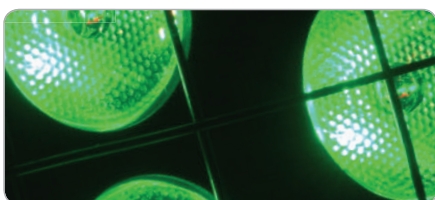

PHOTOMETRIC DATA

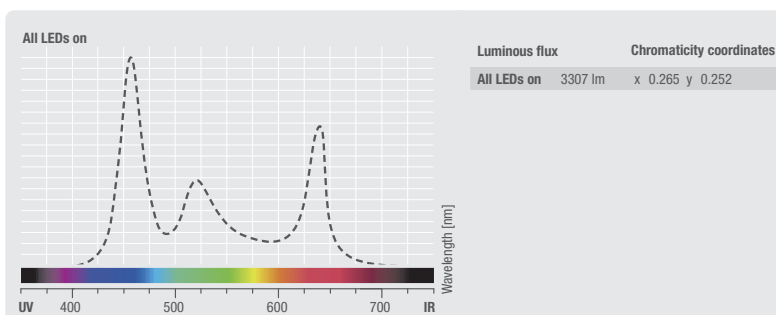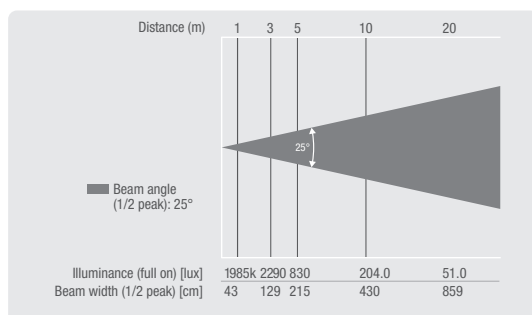

SPECIFICATIONS

Product Number:	CLPST64Q8W
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	18
LED Type:	8 W QUAD Colour
Refresh Rate:	5,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, Sound Control, Strobe,
Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	170 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	5,000 lx @ 1m / 12,000 lx (+/- 10%)
Dimensions (W x H x L):	130 x 220 x 255 mm
Weight:	4.9 kg





STUDIO PAR 64 CAN RGBW Q 8W

18 x 8W QUAD COLOUR LED RGBW
PAR LIGHT IN BLACK HOUSING

- ▶ 18 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for warmer richer colours
- ▶ Operation via DMX, in Master/Slave mode or as a single projector
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double bracket included
- ▶ Sturdy metal housing

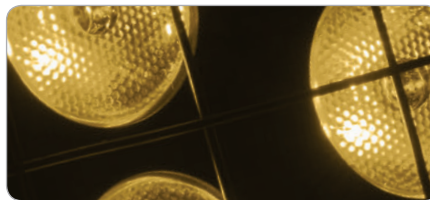

PHOTOMETRIC DATA

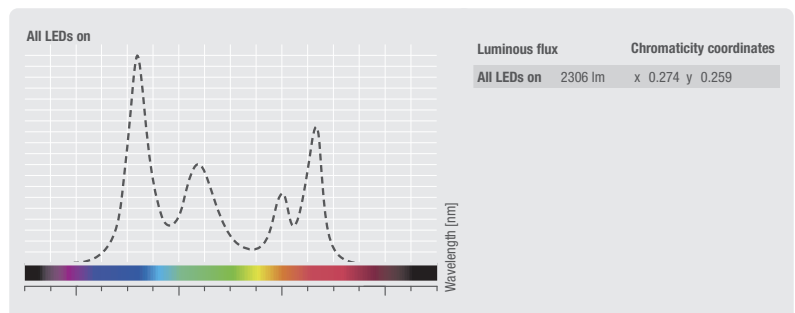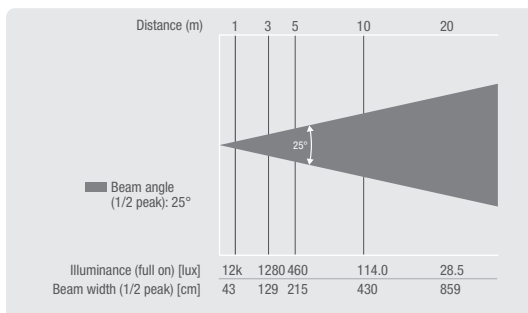

SPECIFICATIONS

Product Number:	CLPST64RGBWQ8W
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	18
LED Type:	8 W QUAD Colour
Refresh Rate:	5,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, Sound Control, Strobe, Colour Jump, RGBW / RGBW
Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	170 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	12,000lx (+/- 10%)
Dimensions (W x H x L):	130 x 220 x 255 mm
Weight:	4.9 kg





STUDIO PAR 64 CAN TRI 3W

18 x 3 W TRI COLOUR LED RGB
PAR LIGHT IN BLACK HOUSING

- ▶ 18 x 3 W High Power TRI RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Sturdy metal housing

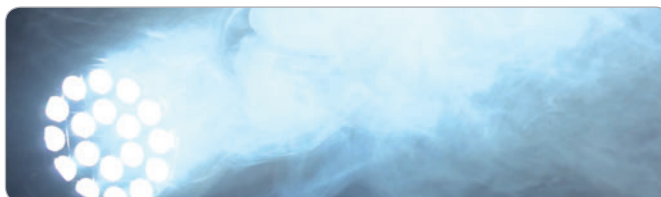

PHOTOMETRICAL DATA

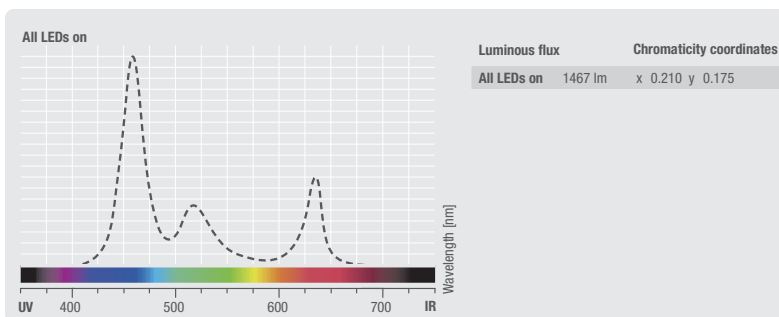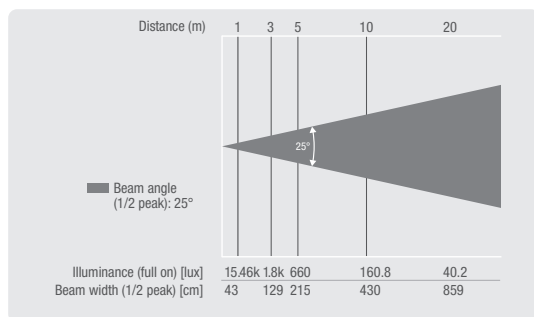

SPECIFICATIONS

Product Number:	CLPST64TRI3W
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	18
LED Type:	3 W TRI Colour
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6-Channel
DMX Functions:	Colour Fade, Colour Jump, Master Dimmer, Strobe
Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	60 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	230 x 220 x 260 mm
Weight:	4.9 kg





STUDIO MINI PAR Q 8W / WH

7x8 W QUAD COLOUR LED PAR CAN RGBW IN BLACK OR WHITE HOUSING

- ▶ 7 x 8 W ultra high-power quad RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master / slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



PHOTOMETRICAL DATA

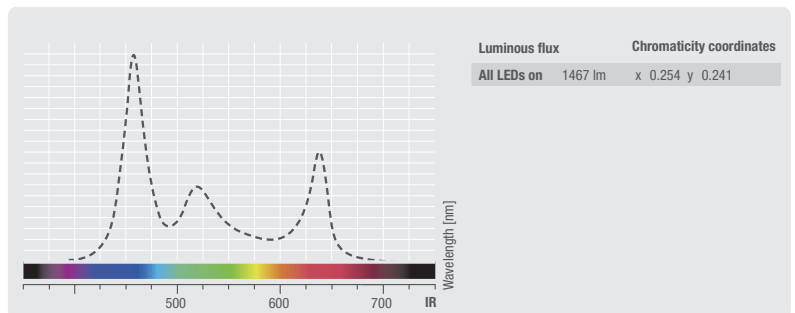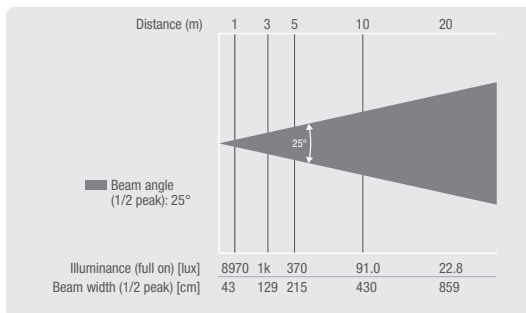

SPECIFICATIONS

Product Number:	CLPSTMINIQ8W (Black Housing) CLPSTMINIQ8WWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	7
LED Type:	8W quad colour
Refresh Rate:	5,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 4, 7-Channel
DMX Functions:	RGBW, Colour Fade, Colour Jump, Master Dimmer, Strobe


Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	60 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / White
Cooling:	Fan
Illuminance:	8,970 lx @ 1 m
Dimensions (W x H x L):	168 x 183 x 186 mm (Excluding Mounting Bracket)
Weight:	2 kg





STUDIO MINI PAR COB 30W / WH

30W COB LED PAR CAN RGB
IN WHITE OR BLACK HOUSING

- ▶ Powerful and innovative 30 W RGB COB LED
- ▶ For rich, natural colours and illumination uniformity
- ▶ Wide Beam Angle
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing

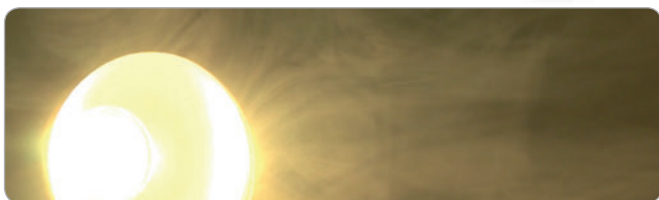

PHOTOMETRICAL DATA

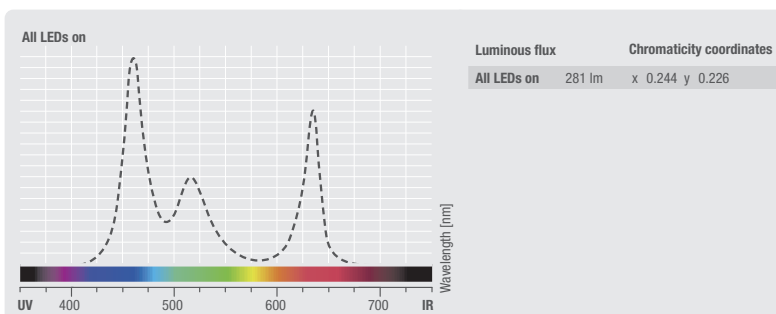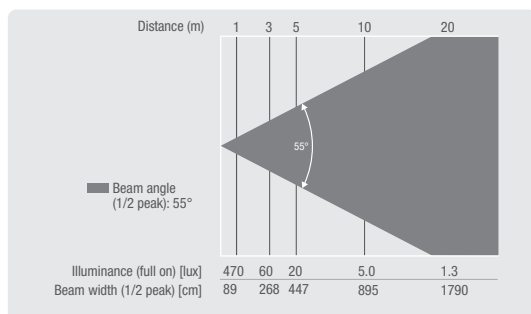

SPECIFICATIONS

Product Number:	CLPSTMINICOB30W (Black Housing) CLPSTMINICOB30WWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	1
LED Type:	30 W COB
Dispersion:	55°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6-Channel
DMX Functions:	RGB, Colour Fade, Colour Jump, Master Dimmer, Strobe, Sound Control

Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode, Strobe
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	15 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Fan
Dimensions (W x H x L):	168 x 183 x 186 mm (Excluding Mounting Bracket)
Weight:	2.0 kg

STUDIO MINI PAR Q 4W W / WH



7 x 4 W COLD WHITE/WARM WHITE LED PAR CAN IN WHITE OR BLACK HOUSING



- ▶ 7 x 4 W High Power Cold White/Warm White LEDs
- ▶ 17 presets for different Colour Temperatures
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



PHOTOMETRICAL DATA

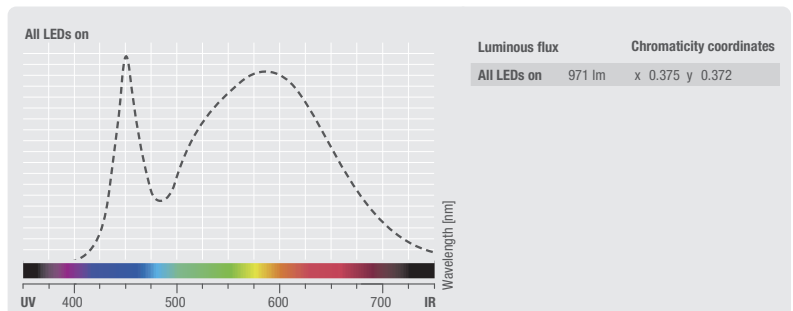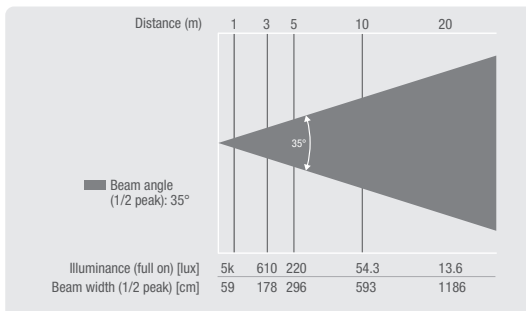

SPECIFICATIONS

Product Number:	CLPSTMINIQ4WW (Black Housing) CLPSTMINIQ4WWWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	Warm White/Cold White
Number Of LEDs:	7
LED Type:	4 W 2 in 1 LED
Dispersion:	35°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5, 6-Channel
DMX Functions:	Cool White, Strobe, Color Temperature (17 Presets), Dimmer Curve (8 Presets), Master Dimmer, Warm White
Standalone Modes:	Static Colour, Slave Mode, Color Temperature (17 Presets)
Controls:	Mode, Value Up, Value Down, Enter

Indicators:	LED Display
Operating Voltage:	100 - 240 V
Power Consumption:	30 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Fan
Illuminance:	5,000 lx @ 1m
Colour Temperature:	3,200 - 6,500 K
Dimensions (W x H x L):	168 x 186 x 186 mm (Excluding Mounting Bracket)
Weight:	2.0 kg
Features:	IR Remote





STUDIO MINI PAR TRI 3W / WH

7 x 3 W TRI-COLOUR LED PAR
CAN RGB IN BLACK
OR WHITE HOUSING

- ▶ 7 x 3 W high-power tri-RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master / slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



PHOTOMETRICAL DATA

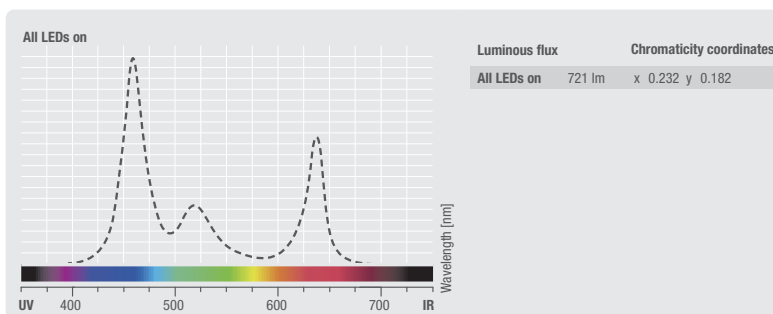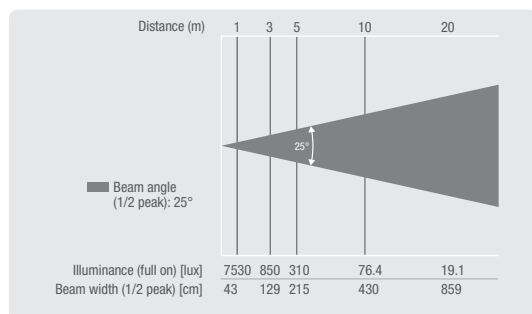

SPECIFICATIONS

Product Number: CLPSTMINITRI3W (Black Housing)
CLPSTMINITRI3WWH (White Housing)

Product Type: Studio Mini PAR

Type: Indoor

Colour Spectrum: RGB

Number Of LEDs: 7

LED Type: 3W Tri-Colour

Dispersion: 25°

DMX Input / Output: XLR 3-Pin Male / XLR 3-Pin Female

DMX Mode: 6-Channel

DMX Functions: RGB, Colour Fade, Colour Jump, Master Dimmer, Strobe

Standalone Modes: Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode

Controls: Mode, Value Up, Value Down, Enter

Indicators: LED Display

Operating Voltage: 100 V AC - 250 V AC

Power Consumption: 15 W

Power Connector: Power Cord With Safety Plug (Type E / CEE 7/7)

Housing Material: Metal

Cabinet Colour: Black / White

Cooling: Convection

Illuminance: 7,530 lx @ 1 m

Dimensions (W x H x L): 168 x 183 x 186 mm (Excluding Mounting Bracket)

Weight: 2 kg




STUDIO PAR BARN DOOR 1B

BARN DOORS FOR STUDIO MINI PAR BLACK / **0.4 KG**
PRODUCT NO: CLPSTBARNDOR1B



STUDIO PAR BARN DOOR 1 WH

BARN DOORS FOR STUDIO MINI PAR WHITE / **0.4 KG**
PRODUCT NO: CLPSTBARNDOR1WH

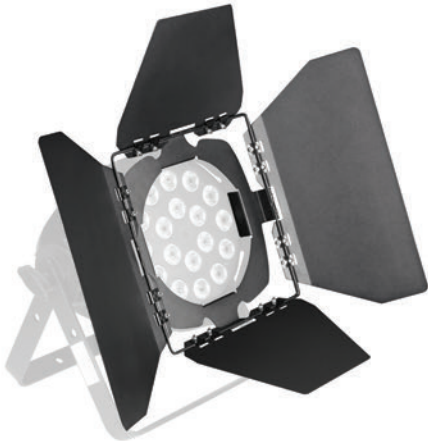

STUDIO PAR BARN DOOR 2B

BARN DOORS FOR STUDIO PAR BLACK / **0.8 KG**
PRODUCT NO: CLPSTBARNDOR2B



STUDIO PAR BARN DOOR 2 WH

BARN DOORS FOR STUDIO PAR WHITE / **0.8 KG**
PRODUCT NO: CLPSTBARNDOR2WH





LED OUTDOOR FIXTURES

You can have creative lighting outdoors with our LED outdoor PAR cans. They are sturdy, have a high performance and are ideal to envision your lighting ideas. You cannot only light up the environment – you can also take care of it. The LED outdoor headlight has a very bright LED lamp, which is extremely durable and consumes very little energy (up to 95 percent less than a common light). The high quality LED outdoor cans are LED PAR devices. PAR is the abbreviation for parabolic aluminium reflector.



OUTDOOR PAR TRI 12 IP 65



12 x 3 W TRI COLOUR

LED OUTDOOR PAR CAN RGB IN BLACK HOUSING

FEATURES

- ▶ 12 x 3 W High Power TRI RGB LEDs
- ▶ IP65 for outdoor use
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact metal housing


PHOTOMETRICAL DATA

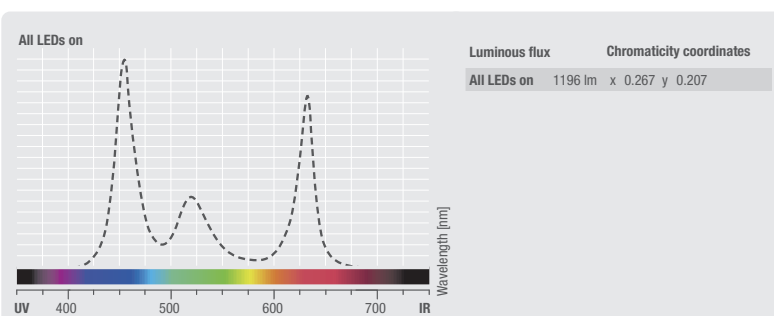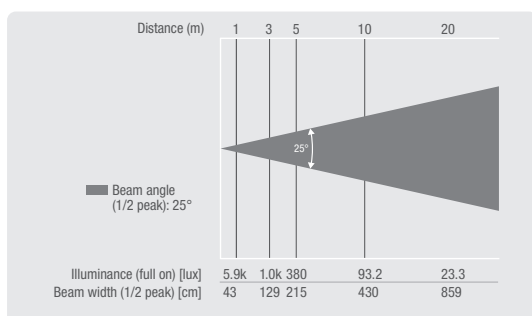

SPECIFICATIONS

Product Number:	CLPSTTRI12IP
Product Type:	LED PAR Lighting
Type:	Outdoor
Colour Spectrum:	RGB
Number Of LEDs:	12
LED Type:	3W Tri-Colour
Dispersion:	25°
DMX Input / Output:	3-Pin special connector, screwable
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6-Channel
DMX Functions:	RGB, Colour Fade, Colour Jump, Strobe, Colour Macro
Standalone Modes:	Static Colour, Colour Change, Colour Fade, Slave Mode

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	50 W
Power Connector:	3-Pin special connector, screwable
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Protection Class IP:	65
Illuminance:	5,900 lx @ 1m
Dimensions (W x H x L):	203 x 203 x 193 mm (Excluding Mounting Bracket)
Weight:	4.25 kg

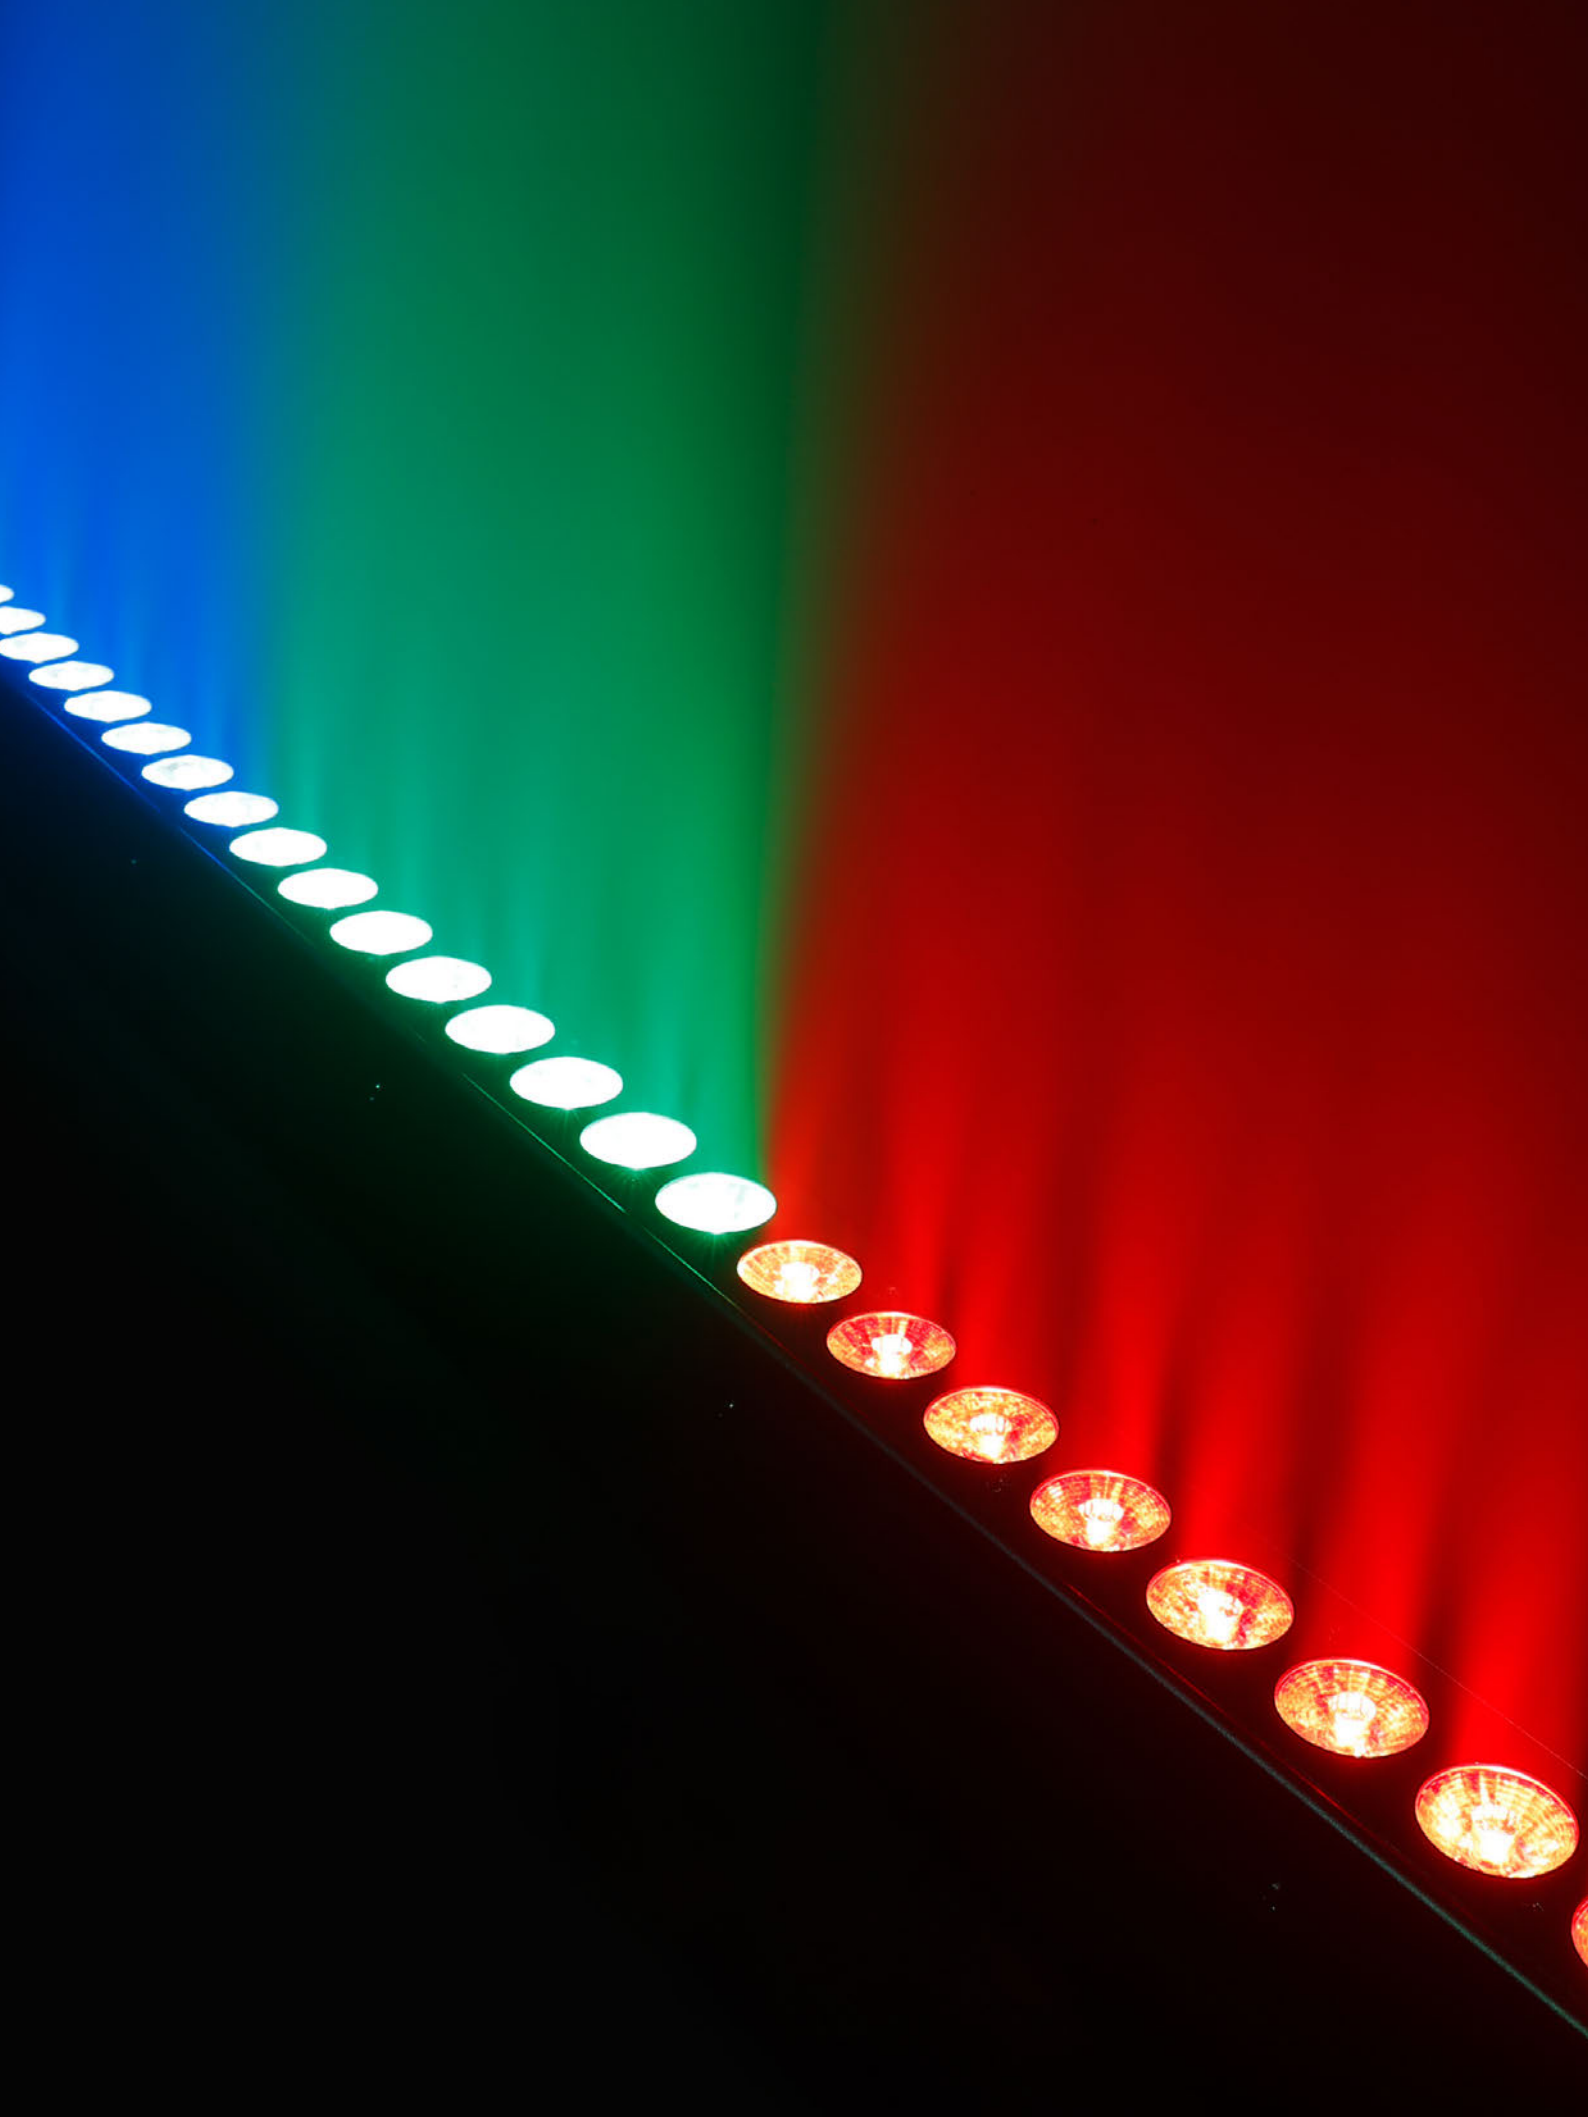

LED BARS


Brilliant and bright colours come to you with the LED bar. Clubs, bars, shops and stages are the ideal locations for this slender instrument. It is also the perfect device for interesting light creations in your own rooms. LEDs have a high performance, are very bright and shed a strong and intense light. This is naturally also true for the LED bar. Common lamps can be used about 2.000 hours in lighting engineering. This is only a fraction of LED's longevity, which can bring you Approx. 50.000 hours of light. The LEDs in the LED bar consume only little energy. Additionally, they dissipate only little heat. This is not only good for your energy balance, it is also good for the environment.



TRIBAR 200 IR / WH

12 x 3 W TRI LED BAR
IN WHITE AND BLACK HOUSING
WITH IR REMOTE CONTROL

- ▶ 12 ultra bright 3W Tri-LEDs
- ▶ 3 individually controllable quartets of LEDs for amazing chase effects
- ▶ Includes IR Remote Control with batteries
- ▶ Convection cooling for noiseless operation
- ▶ 5 Mode DMX control plus master, slave and Standalone Modes
- ▶ Built-in microphone for sound control
- ▶ Backlit display with 4 function keys for easy manual operation
- ▶ IEC mains input and output for serial connection
- ▶ Rugged metal enclosure with roping eye and universal mounting angles
- ▶ Available in black or white

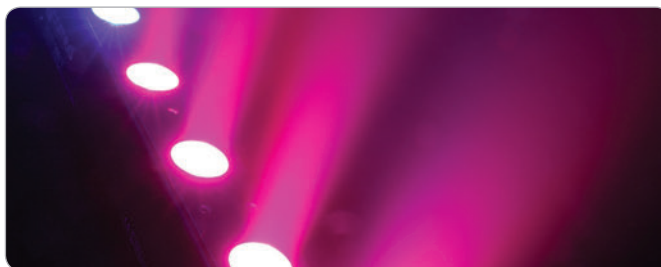

SPECIFICATIONS

Product Number:	CLTRIBAR200IR (Black Housing) CLTRIBAR200IRWH (White Housing)
Product Type:	LED Bars
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	12
LED Type:	3 W TRI Colour
Dispersion:	20°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 9, 12-Channel
DMX Functions:	3 Sections RGB, Colour Macro, Sound Control, Master Dimmer, 12 Programs, Strobe


Standalone Modes:	Strobe, 12 Programs, Colour Macro, Sound Control, Slave Mode, Auto Programs
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	2,340 lx @ 1m
Dimensions (W x H x L):	1022 x 66 x 65 mm (Excluding Mounting Bracket)
Weight:	2.6 kg



TRIBAR 400 IR

24 x 3 W TRI LED BAR
IN BLACK HOUSING WITH
IR REMOTE CONTROL

- ▶ 24 ultra bright 3W Tri-LEDs
- ▶ 3 individually controllable octets of LEDs
- ▶ Includes IR Remote Control with batteries
- ▶ Convection cooling for noiseless operation
- ▶ 5 Mode DMX control plus master, slave and Standalone Modes
- ▶ Built-in microphone for sound control
- ▶ Backlit display with 4 function keys for easy manual operation
- ▶ IEC mains input and output for serial connection
- ▶ Rugged metal enclosure with roping eye and universal mounting angles

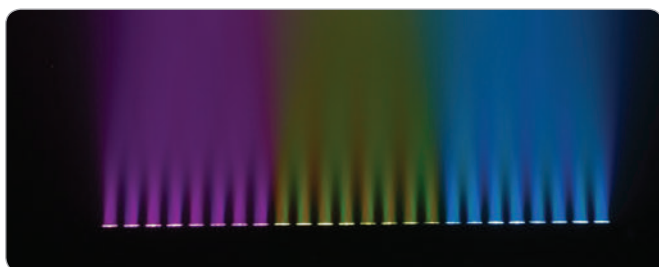

SPECIFICATIONS

Product Number:	CLTRIBAR400IR
Product Type:	LED Bars
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	24
LED Type:	3 W TRI Colour
Dispersion:	20°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 9, 12-Channel
DMX Functions:	3 Sections RGB, Colour Macro, Sound Control, Master Dimmer, 12 Programs, Strobe
Standalone Modes:	Strobe, 12 Programs, Colour Macro, Sound Control, Slave Mode, Auto Programs

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	2,340 lx @ 1m
Dimensions (W x H x L):	1022 x 66 x 65 mm (Excluding Mounting Bracket)
Weight:	2.6 kg



UVBAR 200 IR

12 x 3 W UV LED BAR
IN BLACK HOUSING WITH
IR REMOTE CONTROL

- ▶ UV bar with convenient infrared remote control
- ▶ 12 brilliant 3 watt UV LEDs with 65° Beam Angle
- ▶ Convection cooling for noiseless operation
- ▶ DMX control, master, slave and Standalone Modes
- ▶ Strobe and dimming effects
- ▶ Stiff, rugged metal enclosure with 2 roping eyes
- ▶ Comes with universal mounting angles for optimum alignment



SPECIFICATIONS

Product Number:	CLUVBAR200IR
Product Type:	LED Bars
Type:	Indoor, Washer
Colour Spectrum:	RGB
Number Of LEDs:	12
LED Type:	3 W UV
Dispersion:	65°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2-Channel
DMX Functions:	Master Dimmer, Strobe, Dimmer
Standalone Modes:	Strobe, Sound Control, Master Dimmer


Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	1022 x 66 x 67 mm (Excluding Mounting Bracket)
Weight:	2.3 kg



BAR 10 RGBA / WH

252 x 10 MM LED RGBA
COLOUR BAR IN BLACK
AND WHITE HOUSING

- ▶ 252 powerful, long-life 10 mm RGBA LEDs
- ▶ RGBA for warm, rich colour mixing
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Can be operated in one block or separately in 4 equal blocks
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Universal Mounting Brackets included
- ▶ Rugged slim metal housing

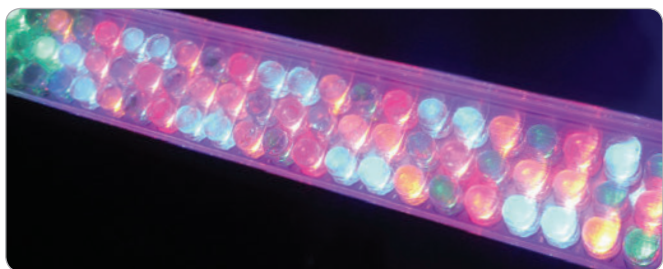

SPECIFICATIONS

Product Number:	CLBARL10RGBA (Black Housing) CLBARL10RGBAWH (White Housing)
Product Type:	LED Bars
Type:	Indoor
Colour Spectrum:	RGBA
Number Of LEDs:	252
LED Type:	10 mm
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 6, 19-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, Master Dimmer, RGBA, Strobe

Standalone Modes:	Auto Run, Colour Change, Colour Fade, Sound Control, Slave Mode, Static Colour
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	40 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Dimensions (W x H x L):	1018 x 63 x 87 mm (Excluding Mounting Bracket)
Weight:	2.5 kg






BAR 10 RGB IR / WH

252 x 10 MM LED RGB
COLOUR BAR BLACK WITH
IR REMOTE CONTROL

- ▶ 252 luminous, long-lasting 10 mm RGB LEDs
- ▶ RGB for warmer, richer colours
- ▶ Operating in one block or separately in 3 equal blocks
- ▶ Supplied with IR remote control
- ▶ Operation via DMX, in Master/Slave Mode or as a single projector
- ▶ Built-in microphone for sound-control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Rugged metal housing with universal Mounting Brackets
- ▶ Power input and output jacks for serial connection

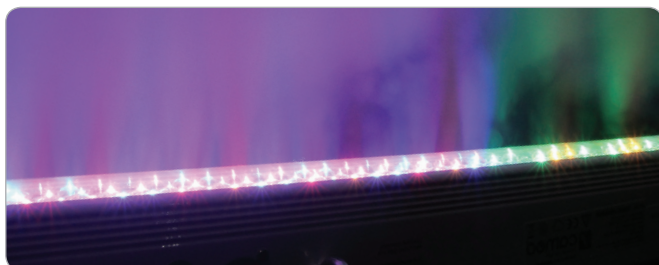

SPECIFICATIONS

Product Number:	CLBARL10RGBIR (Black) / CLBARL10RGBIR WH (White)
Product Type:	Washer
Colour Spectrum:	RGB
Number Of LEDs:	252
LED Type:	10 mm
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 9, 12-Channel
DMX Functions:	Colour Macro, Sound Control, RGB, Program, Strobe
Standalone Modes:	Auto Run, Colour Macro, Sound Control, Slave Mode, 12 Programs

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	2,340 lx @ 1m
Dimensions (W x H x L):	1018 x 63 x 87 mm
Weight:	2.5 kg



LASERS

Laser lights are highly effective to add animation, drama and serious punch to performances and events taking them to a whole new level. They create exciting and impressive lighting effects at big concerts, mobile DJ shows, in nightclubs and major bars. With its Ioda, Luke and Wookie series Cameo provides compact, easily portable laser lights to generate stunning graphic patterns with razor-sharp beams. Featuring ILDA and DMX control, pre-programmed patterns, sound activation plus master, slave and standalone capability, Cameo pro level lasers are very affordable and the convenient way to create stellar light shows.



IODA 1000 RGB

PROFESSIONAL 1000MW RGB SHOW LASER

FEATURES

- ▶ Professional laser show light
- ▶ Dust proof aluminium enclosure for minimum maintenance
- ▶ High speed high performance 30 Kpps galvo scanners @ 8° ILDA
- ▶ 128 pattern presets
- ▶ Analog modulation for up to 16 million color hues
- ▶ Precision beams with minimum Divergence for razor-sharp projections
- ▶ ILDA, DMX and sound control plus auto function
- ▶ Master, slave and Standalone Modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Scan Fail Safety system
- ▶ Neutrik PowerCON mains inputs and outputs
- ▶ Low noise fan for Quiet and cool operation





SPECIFICATIONS

Product Number:	CLLIODA1000RGB
Product Type:	Laser
Total Power:	1000 mW
Colour Spectrum:	RGB
Wavelength:	447 nm, 532 nm, 638 nm
Beam Data:	Approx. 3 mm / 1.5 mrad Divergence
Laser Sources:	DPSS, Laser diode
Laser Class:	4
Scanner:	High Performance Galvoscan, 30 kpps @ 8 Degrees ILDA
Max. Scan Angle:	60°
Operating Modes:	Auto Programs, DMX 512 Protocol, ILDA, Sound Control

DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
ILDA input / output:	25-Pin Sub-D Male / Female
DMX Mode:	4, 11-Channel
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Power Connector:	Neutrik PowerCON
Housing Material:	Aluminium
Cabinet Colour:	Black
Dimensions (W x H x L):	188 x 201 x 210 mm
Weight:	6.5 kg



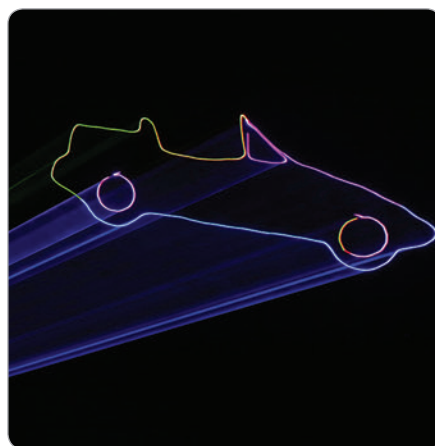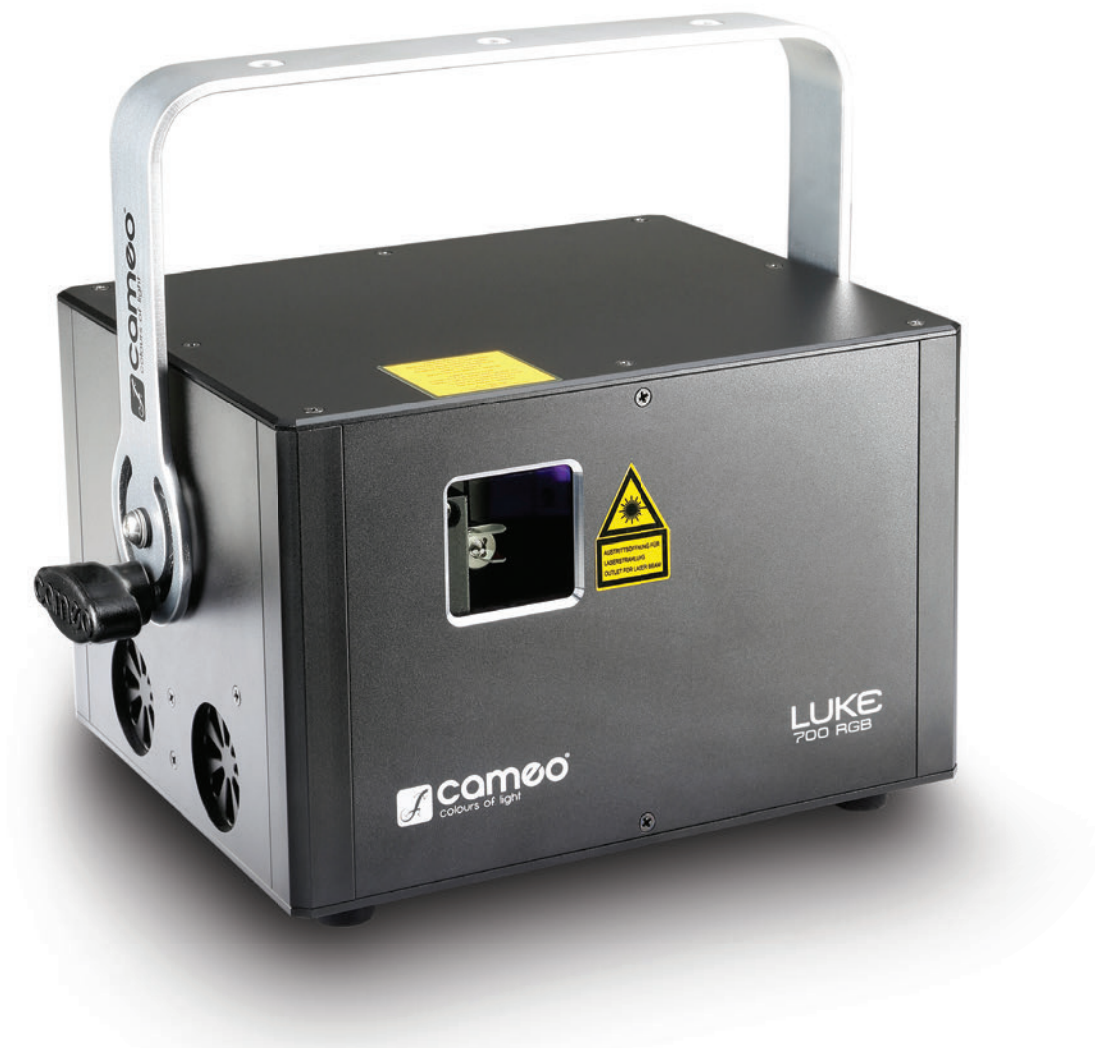

LUKE SERIES

PROFESSIONAL RGB SHOW LASER

FEATURES



- ▶ Professional laser show light
- ▶ Dual layer construction for maximum optical performance
- ▶ High speed 30 Kpps galvo scanners @ 8° ILDA
- ▶ 128 pattern presets
- ▶ Precision beams with minimum Divergence for razor-sharp projections
- ▶ ILDA, DMX and sound control plus auto function
- ▶ Master, slave and Standalone Modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Scan Fail Safety system
- ▶ Neutrik PowerCON mains inputs and outputs
- ▶ Rugged aluminium enclosure with low noise fan and key switch



SPECIFICATIONS

Product Number:	CLLLUKE700RGB	CLLLUKE1000RGB
Product Type:	Laser	Laser
Total Power:	700 mW	1000 mW
Colour Spectrum:	RGB	RGB
Wavelength:	447 nm, 532 nm, 650 nm	447 nm, 532 nm, 638 nm
Beam Data:	Approx. 3 mm / 2 mrad Divergence	Approx. 3 mm / 1.5 mrad Divergence
Laser Sources:	Laser Diode & DPSS	Laser Diode & DPSS
Laser Class:	4	4
Scanner:	High-performance galvoscaner, 30 kpps @ 8 Degrees ILDA	High-performance galvoscaner, 30 kpps @ 8 Degrees ILDA
Max. Scan Angle:	60 °	60 °
Operating Modes:	Auto Programs, DMX 512 Protocol, ILDA, Sound Control	Auto Programs, DMX 512 Protocol, ILDA, Sound Control
DMX Input / Output:	3-Pin XLR Male / Female	3-Pin XLR Male / Female
ILDA input / output:	25-Pin Sub-D Male / Female	25-Pin Sub-D Male / Female
DMX Mode:	4, 11-Channel	4, 11-Channel
Controls:	Enter, Mode, Value Up, Value Down	Mode, Enter, Value Down, Value Up
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W	100 W
Power Connector:	Neutrik PowerCON	Neutrik PowerCON
Housing Material:	Metal	Metal
Dimensions (W x H x D):	215 x 157 x 225 mm	215 x 157 x 225 mm



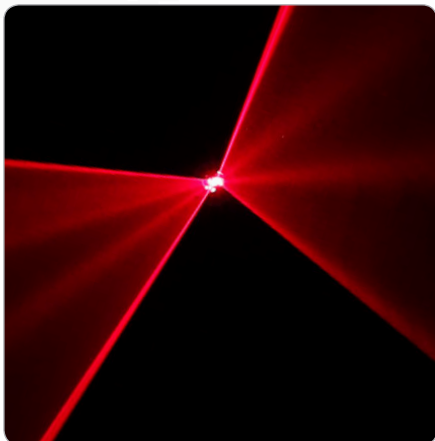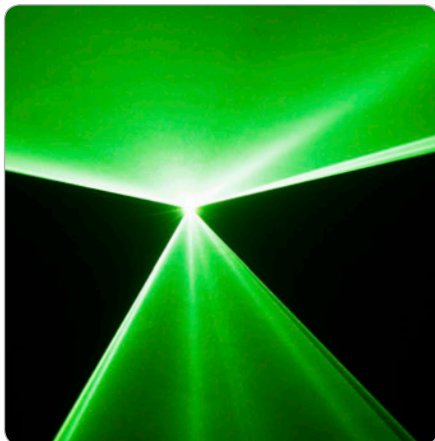

WOOKIE SERIES


ANIMATION LASER GREEN / RED / RGY / RGB OR BLUE

FEATURES

- ▶ Animation laser with high speed 5 Kpps stepper motor
- ▶ 60° scan angle
- ▶ Precision beams with minimum Divergence
- ▶ 32 pattern presets
- ▶ DMX, sound and infrared control plus auto function
- ▶ Master, slave and Standalone Modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Rugged aluminium enclosure with key switch
- ▶ Includes handheld infrared remote



Available versions:



SPECIFICATIONS

Product Number:	CLLWOOKIE150G	CLLWOOKIE200R	CLLWOOKIE200RGY	CLLWOOKIE400RGB	CLLWOOKIE600B
Product Type:	Laser	Laser	Laser	Laser	Laser
Total Power:	150 mW	200 mW	200 mW	400 mW	600 mW
Colour Spectrum:	Green	Red	RGY	RGB	Blue
Wavelength:	532 nm	650 nm	532 nm, 650 nm	447 nm, 532 nm, 650 nm	447 nm
Beam Data:	Approx. 3 mm / 1 mrad Divergence	Approx. 3 mm / 1 mrad Divergence	Approx. 3 mm / 1 mrad Divergence	Approx. 3 mm / 2 mrad Divergence	Approx. 3 mm / 2 mrad Divergence
Laser Sources:	DPSS	Laser diode	Laser diode, DPSS	Laser diode, DPSS	Laser diode
Laser Class:	3B	3B	3B	3B	4
Scanner:	High Speed Stepper Motors, 5 kpps	High Speed Stepper Motors, 5 kpps	High Speed Stepper Motors, 5 kpps	High Speed Stepper Motors, 5 kpps	High Speed Stepper Motors, 5 kpps
Max. Scan Angle:	60°	60°	60°	60°	60°
Operating Modes:	Auto Programs, DMX 512 Protocol, Sound Control	Auto Programs, DMX 512 Protocol, Sound Control	Auto Programs, DMX 512 Protocol, Sound Control	Auto Programs, DMX 512 Protocol, Sound Control	Auto Programs, DMX 512 Protocol, Sound Control
DMX Input / Output:	3-Pin XLR Male / Female	3-Pin XLR3 male / female	3-Pin XLR Male / Female	3-Pin XLR Male / Female	3-Pin XLR Male / Female
DMX Mode:	3, 9-Channel	3, 9-Channel	3, 9-Channel	3, 9-Channel	3, 9-Channel
Controls:	Mode, Enter, Value Down, Value Up	Mode, Enter, Value Down, Value Up	Mode, Enter, Value Down, Value Up	Mode, Enter, Value Down, Value Up	Mode, Enter, Value Down, Value Up
Power Supply:	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz	AC 100-240 V / 50-60 Hz
Power Consumption:	50 W	50 W	50 W	50 W	50 W
Power Connector:	IEC Power Socket Male	IEC Power Socket Male	IEC Power Socket Male	IEC Power Socket Male	IEC Power Socket Male
Housing Material:	Metal	Metal	Metal	Metal	Metal
Housing Colour:	Black	Black	Black	Black	Black
Dimensions (W x H x D):	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)
Weight:	2.0 kg	2.0 kg	2.0 kg	2.0 kg	2.0 kg





LED STROBES




Controlling the weather is impossible in nature, but in clubs or discotheques you can control flashes with an LED Strobe. This is an instrument emitting flashes of light in determined periods. Cameo's Strobes work with 20 flashes of light per second. The typical disco effect with staccato movements occurs if the LED Strobe is used in a dark setting.





THUNDER WASH 600 W

3 IN 1 STROBE, BLINDER AND
WASH LIGHT 648 x 0.2 W WHITE

- Strobe, Blinder and Wash Light all in one
- 648 white SMD LEDs
- 1 to 30 flashes/sec adjustable
- DMX, Sound- and manual control
- Master, Slave and Standalone operation
- Rugged metal housing with universal mounting bracket
- 4-zone segment control for spectacular chase effects

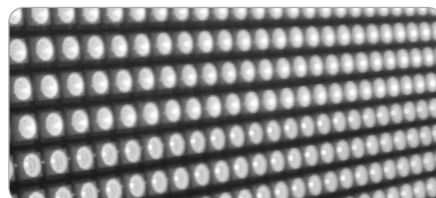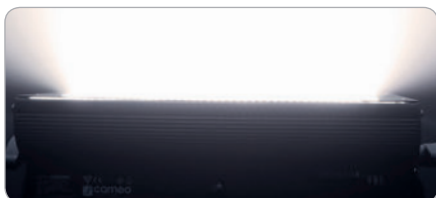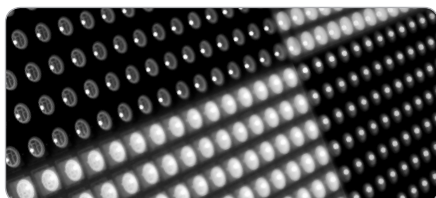

PHOTOMETRICAL DATA

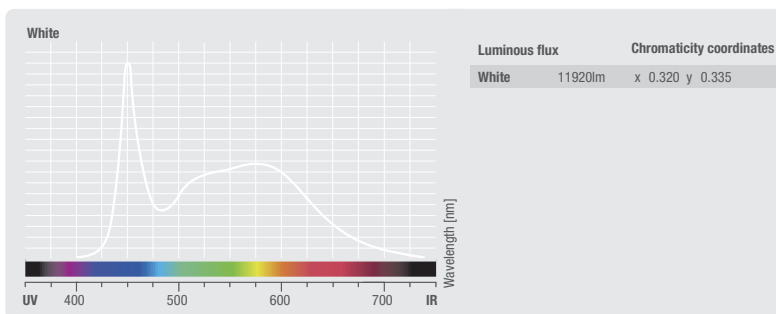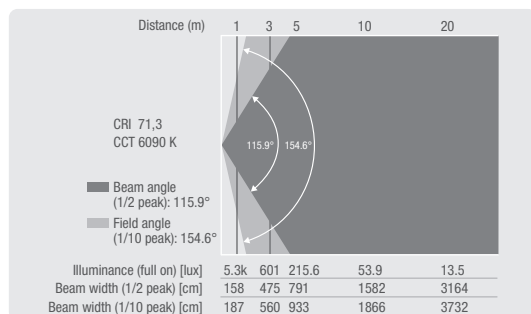

SPECIFICATIONS

Product Number:	CLTW600W
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	White
Number Of LEDs:	648
LED Type:	0.2 W
Dispersion:	116°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 1, 2, 5, 7-Channel
DMX Functions:	Dimmer, Flash Duration, Flash Rate
Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control



Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	335 x 93 x 182 mm (Excluding Mounting Bracket)
Weight:	1.8 kg





THUNDER WASH 600 RGB

3 IN 1 STROBE, BLINDER AND WASH LIGHT 648 x 0.2 W RGB

- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 648 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket

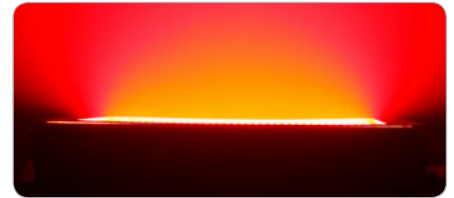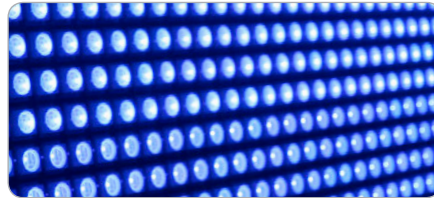

PHOTOMETRICAL DATA

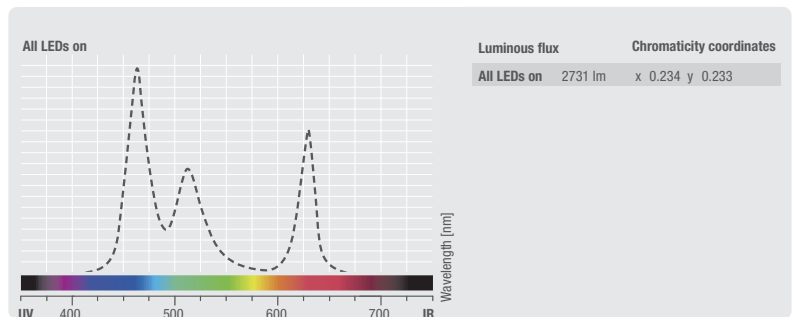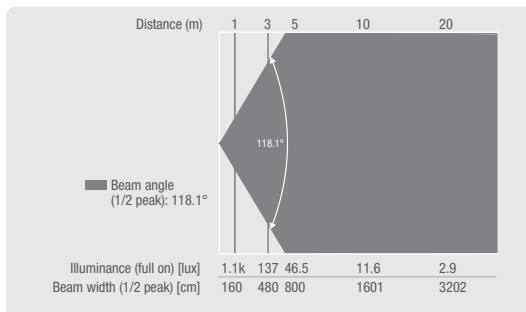

SPECIFICATIONS

Product Number:	CLTW600RGB
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	RGB
Number Of LEDs:	648
LED Type:	0.2 W
Dispersion:	118°
Refresh Rate:	1 - 30 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2 Ch-1, 2 Ch-2, 3 Ch-1, 3 Ch-2, 3 Ch-3, 2, 9, 12-Channel
DMX Functions:	Dimmer, Flash Duration, Flash Rate



Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	335 x 93 x 182 mm (Excluding Mounting Bracket)
Weight:	1.8 kg





THUNDER WASH 100 W

3 IN 1 STROBE, BLINDER AND
WASH LIGHT 648 x 0.2 W WHITE

- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 132 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ Low Power Consumption

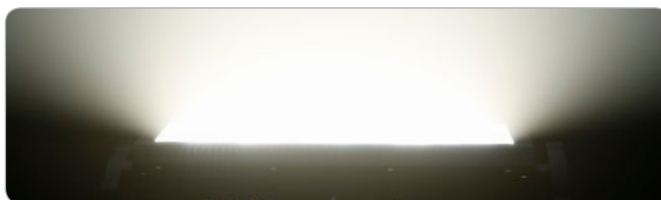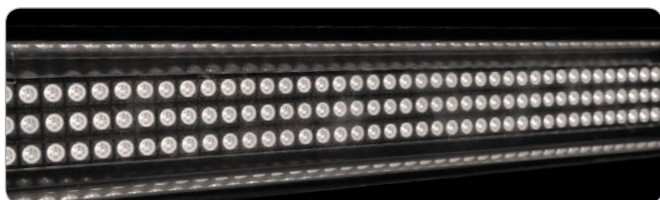

PHOTOMETRICAL DATA

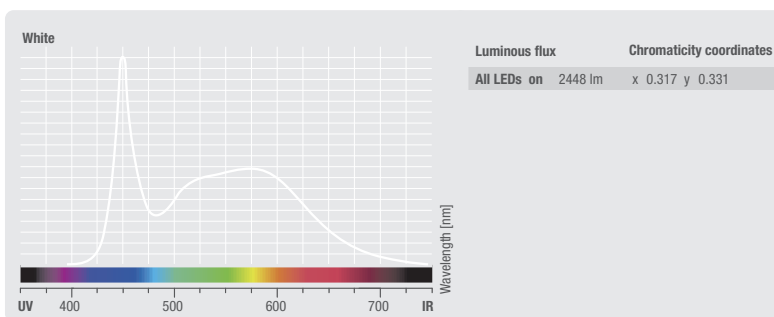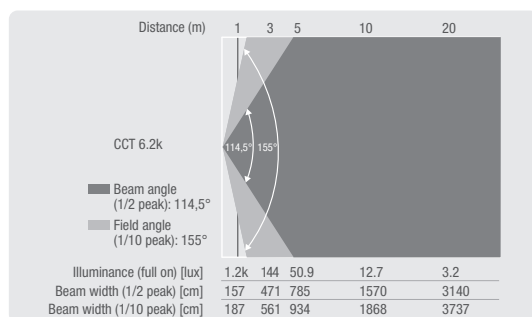

SPECIFICATIONS

Product Number:	CLTW100W
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	White
Number Of LEDs:	132
LED Type:	0.2 W
Dispersion:	115°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-1, 1, 2-Channel
DMX Functions:	Dimmer, Flash Rate
Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control



Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	310 x 70 x 70 mm (Excluding Mounting Bracket)
Weight:	1.4 kg





THUNDER WASH 100 RGB

3 IN 1 STROBE, BLINDER AND
WASH LIGHT 648 x 70 x 0.2 W RGB

- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 132 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ Low Power Consumption

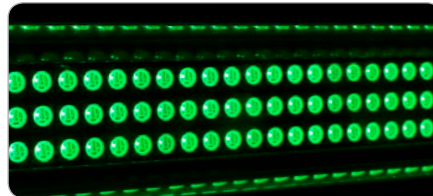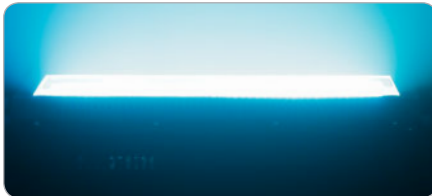

PHOTOMETRICAL DATA

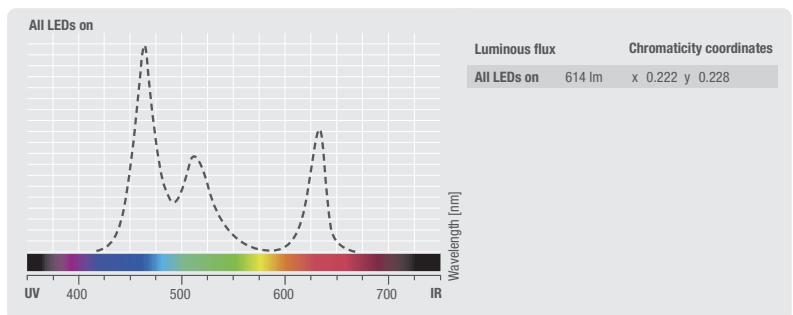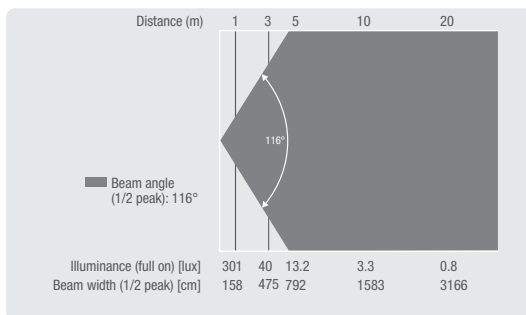

SPECIFICATIONS

Product Number:	CLTW100RGB
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	RGB
Number Of LEDs:	132
LED Type:	0.2 W
Dispersion:	116°
Refresh Rate:	1 - 30 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2 Ch-1, 2 Ch-2, 3 Ch-1, 3 Ch-2, 3 Ch-3, 1, 4, 6-Channel
DMX Functions:	Dimmer, Flash Duration, Flash Rate

Standalone Modes:	Dimmer Mode, Flash Duration, Slave Mode, Sound Control
Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	310 x 70 x 70 mm (Excluding Mounting Bracket)
Weight:	1.4 kg

NEW



FLASH MATRIX 250

3-IN-1 STROBE-, CHASE- AND BLINDER EFFECT

- ▶ 3 effects in 1 fixture: Strobe, chaser and blinder
- ▶ 25 powerful white 6W LEDs for impressive, ultra bright 9200 lm
- ▶ 1 - 30 Hz adjustable Strobe
- ▶ 25-zone chase effect
- ▶ Alphabetic character and numeral mapping
- ▶ 7 Modes of DMX control plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ 4-button LED Display for easy configuration



SPECIFICATIONS

Product Number:	CLFM250
Product Type:	LED Lighting Effects
Type:	Strobe
Colour Spectrum:	White
Number Of LEDs:	25
LED Type:	COB LED
Dispersion:	(Beam) 50° / (Field) 74°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 2, 3, 5, 10, 25, 30-Channel
DMX Functions:	Letters, Numbers, Strobe, Symbols, Auto Programs
Standalone Modes:	Strobe, Auto Run, Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down


Indicators:	7-Segment AF Input Level Meter (Left / Right)
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	125 W
Power Connector:	IEC Power Input And Output
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Quiet
Illuminance:	3,730 lx @ 1 m
Luminous Flux:	9,200 lm
Dimensions (W x H x L):	305 x 310 x 105 mm (Excluding Mounting Bracket)
Weight:	4 kg
Features:	Adjustable Mounting Bracket Included



FLASH BAR 150

3-IN-1 STROBE-, CHASE- AND BLINDER EFFECT FIXTURE

- ▶ 3 FX in 1: Strobe, chaser and blinder
- ▶ 15-zone chase effect
- ▶ 15 powerful, ultra bright 6W LEDs
- ▶ 6 Modes of DMX control plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ 4-button LED Display for easy operation

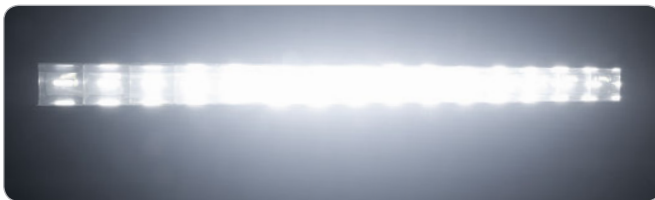

SPECIFICATIONS



Product Number:	CLFB150
Product Type:	LED Strobe
Type:	Strobe
Colour Spectrum:	White
Number Of LEDs:	15
LED Type:	6 W
Dispersion:	80°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 2, 3, 5, 15, 20-Channel
DMX Functions:	Auto Programs, Dimmer, Flash Duration, Flash Rate
High Speed Strobe:	> 30 Hz

Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	2,250 lx @ 1m
Dimensions (W x H x L):	906 x 73 x 1155 mm
Weight:	3.3 kg



LED LIGHT EFFECTS

With the LED effect moonflower you can have a creative lighting choreography. Create the typical LED effect of discotheques and clubs with the moonflower headlight. That means, dancing lights filling the room with colourful light beams. This intense light effect is mostly controlled by an integrated microphone transporting the sounds in the sound control Mode. Although they are moving at rapid speed, you can still distinguish the colourful light beams with the LED effect moonflower. Further features are wide Beam Angles and the possibility to regulate or programme your choreography manually.

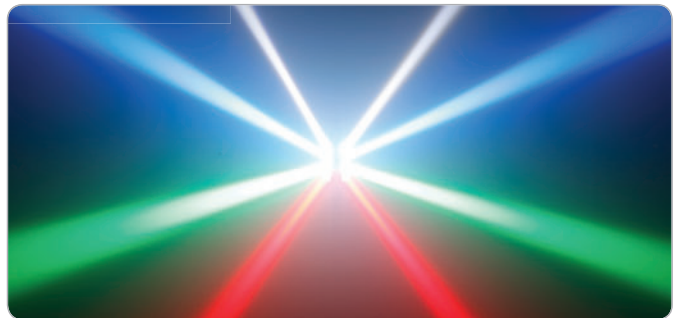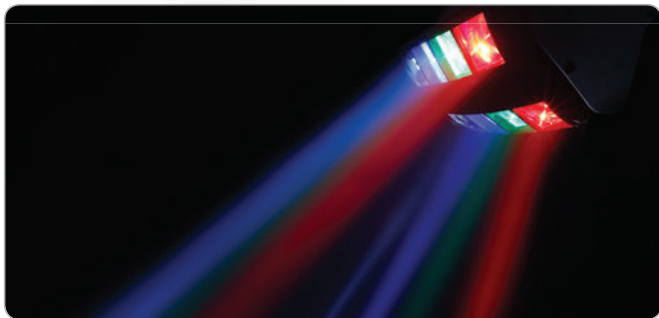

OCTAFLY XS

SWEEPING 8-ZONE RGBW CHASE EFFECT LIGHT

FEATURES

- ▶ Quick sweeping 8-zone chase effect
- ▶ Dual LED bars with independent 270° tilt and 4 lenses each
- ▶ Tightly focused 4.5° beam spread
- ▶ 3 DMX Modes plus Standalone, Master and Slave operation
- ▶ Sound activation and Show Mode with amazing built-in Auto Programs
- ▶ Intense pulse & Strobe effects
- ▶ Convection Cooling
- ▶ 4-button LED Display for easy configuration



SPECIFICATIONS

Product Number:	CLOFXS
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	2x Red, 2x Blue, 2x Green, 2 x white
Number Of LEDs:	8
Rated Avg. Life:	50,000 h
Beam Angle:	4.5°
LED Type:	3 W
Protocols:	USITT DMX-512
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	5, 9, 11-Channel
DMX Functions:	Master Dimmer, PAN, PAN Fine, Strobe, Strobe Duration, Red, Green, Blue, White, Auto/Sound Program, Sound-Sensitivity / Auto-Speed
Wireless DMX:	No
Flash Rate Strobe:	1 - 20Hz

Standalone Modes:	Show, Auto Run, Sound Control
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Fuse:	F 3 AL
Power Input:	IEC Power Connector Male
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Convection Cooled
Protection Class IP:	IP20
Operating Temperature:	0 - 40°C
Battery:	No
Dimensions (W x H x D):	280 x 145 x 150 mm
Weight:	2 kg



NEW



UVO

5-IN-1 LED EFFECT LIGHT

- ▶ 5-in-1 LED effect light with IR remote control
- ▶ Wash light and black light with 9 x 4W RGB+UV LEDs
- ▶ Flower effect with 24 red, 18 green, 18 blue and 24 amber LEDs
- ▶ Laser with Red 100 mW and green 30 mW diodes
- ▶ Stroboscope with 12 ultra bright white 0.5 W LEDs
- ▶ All effects can be applied individually
- ▶ DMX control, sound activation and automated programs
- ▶ Master and slave operation
- ▶ Rugged all-metal housing with Low-Noise Fan
- ▶ Universal mounting bracket included

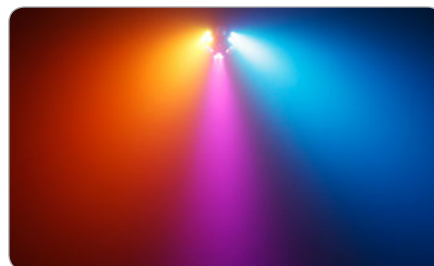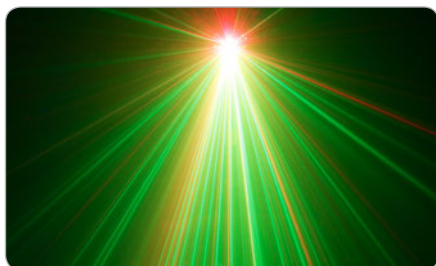

SPECIFICATIONS

Product Number:	CLUVO
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Laser Effects
Colour Spectrum Washlight:	RGB+UV
Number Of LEDs Washlight:	9
Colour Spectrum Flower Effect:	RGBA
Number Of LEDs Flower Effect:	84
Colour Spectrum Laser Effect:	Green LED (532 nm), Red LED (650 nm)
Number Of Diodes Laser Effect:	1 x Green, 1 x Red
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Lock Switch
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	12
LED Type Strobe:	0.5 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female


DMX Mode:	3, 5, 12, 27, 32-Channel
DMX Functions:	Laser, Auto Programs, Wash, Strobe, Flower, Sound Programs
Standalone Modes:	Auto Programs, Slave Mode, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	70 W
Power Connector:	IEC Power Input And Output
Fuse:	T 1.6AL / 250 V
Temperature range:	0 - 40 °C
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Dimensions (W x H x L):	280 x 230 x 170 mm
Weight:	2.6 kg
Features:	Adjustable Mounting Bracket Included, Connection For External Emergency Stop Switch, IR Remote, Key Switch With 2 Keys



STORM

3 IN 1 LIGHTING EFFECT,
5 x 3W RGBWA DERBY,
STROBE AND GRATING LASER

- ▶ 3-in-1 LED Effect
- ▶ 5 x 3 W RGBWA Derby Effect
- ▶ 150 mW Grating Laser (Red 100 mW, Green 50 mW)
- ▶ 8 x 1 W Strobe LED's
- ▶ 10 DMX channels, sound and automatic control
- ▶ Master and slave operation
- ▶ Low Power Consumption
- ▶ Sturdy metal housing
- ▶ Universal mounting bracket included

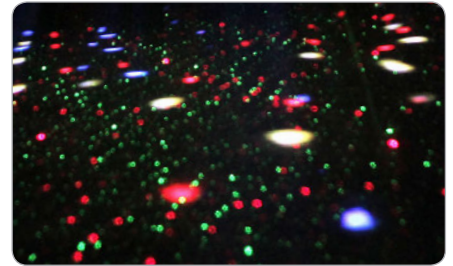

SPECIFICATIONS

Product Number:	CLSTORM
Product Type:	LED Lighting Effects
Type:	LED / Laser / Effects
Colour Spectrum Derby Effect:	RGBWA
Number Of LEDs Derby Effect:	5
LED Type Derby Effect:	3 W
Dispersion Derby Effect:	68°
Colour Spectrum Laser Effect:	Green LED (532 nm) , Red LED (650 nm)
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Beam Angle Laser Effect:	74°
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Remote Connection
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	8
LED Type Strobe:	1 W
Beam Angle Strobe:	8°


DMX Input / Output:	Optional Remote Switch , XLR 3-Pin Male / Female
DMX Mode:	3, 5, 12, 27, 32-Channel
DMX Functions:	Laser, Auto Programs, Derby, Strobe, Sound Programs
Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	250 x 250 x 170 mm
Weight:	4.3 kg
Features:	Adjustable Mounting Bracket Included, Optional Remote Switch, Security Lock Slot



FLAT STORM

3-IN-1 FLAT PAR CAN WITH GRATING LASER AND STROBE

- ▶ 3-in-1 flat PAR can with grating laser and Strobe
- ▶ PAR can with 6 x 9W RGB LEDs and single pixel control
- ▶ Class 3R grating laser with Red 100 mW and green 30 mW diodes
- ▶ Strobe with 24 white 0.5 W LEDs
- ▶ Each effect individually usable
- ▶ 4 DMX Modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Compound housing with Low-Noise Fan and safety eye
- ▶ Infrared remote and Adjustable Mounting Bracket Included

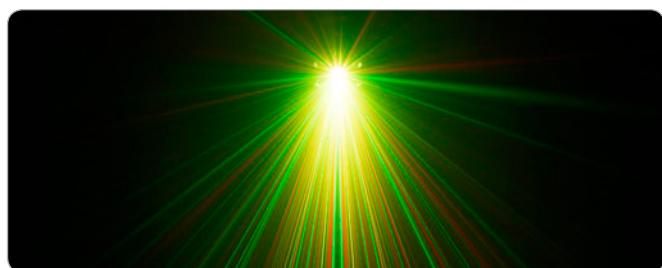

SPECIFICATIONS

Product Number:	CLFLATSTORM
Product Type:	LED Lighting Effects
Type:	Laser, LED / Strobe / Laser Effects
Colour Spectrum Laser Effect:	Green LED (532 nm) , Red LED (650 nm)
Number Of Diodes Laser Effect:	1 x Green , 1 x Red
Type of Diodes Laser Effect:	Red 100mW, Green 30mW
Laser Class Laser Effect:	3R
Colour Spectrum Strobe:	CW
Number Of LEDs Strobe:	24
LED Type Strobe:	0.5 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3, 5, 9, 30-Channel

DMX Functions:	Auto Programm Speed, Auto Programs, Colour Macro, Laser, Master Dimmer, Rotate Laser, Single RGB LED's, Sound Control, Strobe, Strobe Speed Laser
Standalone Modes:	Auto Programs, Master / Slave Mode, Sound Programs, Static
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4x7 Segment LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Fuse:	T 1.0A
Housing Material:	ABS Plastic
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	207 x 207 x 78 mm
Weight:	1.3 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Key, Remote Connection


NEW

FLAT MOON

3-IN-1 LIGHTING EFFECT WITH
FLAT 3-IN-1 MULTI-EFFECT RGB
+UV PAR-LIGHT WITH STROBE



- ▶ 3-in-1 multi-effect light with RGB+UV, cold white strobe and single RGB centre LED
- ▶ 9 x 4W RGB+UV LEDs for rich colour mixing and blacklight
- ▶ 21 x 0.5W cold white SMD LEDs for dynamic high-speed strobe effects
- ▶ Single 18W RGB centre LED
- ▶ Individual control of RGB+UV ring, strobe programs and center LED
- ▶ 4 DMX plus automatic and sound activation modes
- ▶ Master, slave and standalone operation
- ▶ Low-noise fan for cool, quiet operation
- ▶ IR remote and universal mounting bracket included

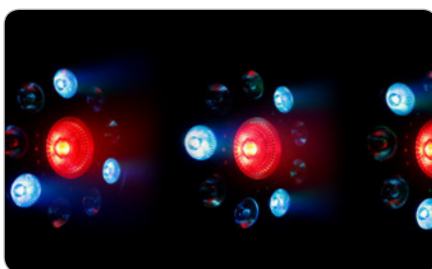

SPECIFICATIONS

Product Number:	CLFLATMOON
Product Type:	LED PAR Lighting
Type:	LED / Laser / Effects
Colour Spectrum PAR:	RGB+UV
LED Type PAR:	4 W
Number of LEDs PAR:	9
Colour Spectrum centre LED:	RGB
Number of centre LEDs:	1
LED Type centre LEDs:	18 W
Colour Spectrum Strobe:	CW
Number of LEDs Strobe:	21
LED Type Strobe:	0.5 W
DMX Input:	XLR 3-Pin Male
DMX Mode:	2, 5, 9, 22-Channel
DMX Functions:	Auto programs, Colour macro, Master dimmer, RGB centre LED, RGB+UV, Sound control, Strobe

Standalone Modes:	Auto programs, Master / Slave mode, Setup, Sound programs, Static colour
Controls:	Down, Enter, Mode, Up
Indicators:	4x7 segment LED Display
Power Connector:	IEC Power Input And Output
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	67 W
Fuse:	T1.0A
Temperature range:	0 - 40 °C
Housing Material:	ABS plastic
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	207 x 78 x 207 mm
Weight:	1.8 kg
Features:	Adjustable mounting bracket included, IR Remote, Security lock slot






STORM FX

3-IN-1 LIGHTING EFFECT WITH GRATING LASER, STROBE AND DERBY EFFECT INCL. IR-REMOTE

- ▶ 3 FX in 1: grating laser, Strobe, chaser and derby effect
- ▶ Laser with Red 100mW / 650nm and green 30mW / 532nm diodes
- ▶ Strobe with 12 ultra-bright white 0.5 W LEDs
- ▶ RGBWA derby effect with 9 W RGB and 9 W BWA LEDs
- ▶ 2 DMX Modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Each effect individually usable
- ▶ Low-Noise Fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included

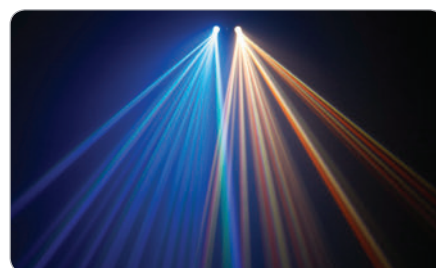

SPECIFICATIONS

Product Number:	CLSTORMFX
Product Type:	LED Lighting Effects
Type:	LED / Laser / Effects
Colour Spectrum Derby Effect:	RGBWA (9W RGB + 9W BWA)
Number Of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Number Of Diodes Laser Effect:	1 x Green, 1 x Red
Colour Spectrum Laser Effect:	Green LED (532 nm) , Red LED (650 nm)
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Lock Switch
Colour Spectrum Strobe:	white
Number Of LEDs Strobe:	12
LED Type Strobe:	0.5 W


DMX Input / Output:	XLR 3-Pin Male / Female
DMX Mode:	2, 12-Channel
DMX Functions:	Auto Programs, Derby, Strobe, Sound Programs
Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	290 x 210 x 200 mm
Weight:	2.6 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Optional Remote Switch, Security Lock Slot, Short-Circuit Connector For Remote Connection Included



MOONFLOWER HP

32 W 4 IN 1 RGBW HIGHPOWER LED EFFECT

- ▶ 1 x 32 W RGBW 4 in 1 High Power LED
- ▶ Low Power Consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included

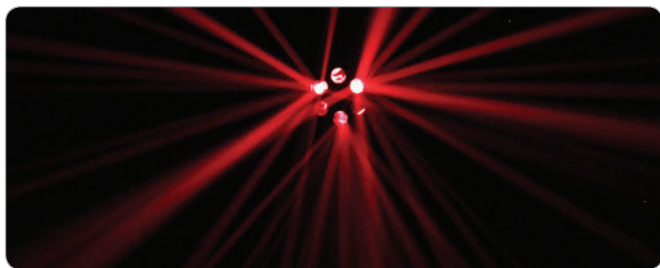

SPECIFICATIONS

Product Number:	CLFLOWERHP
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	32 W 4 in 1
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5-Channel
DMX Functions:	Clockwise Fast & Slow, Colour Selection, Counter Clockwise Fast & Slow, Dimmer, No Rotation, Strobing Fast & Slow



Standalone Modes:	Auto Run, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	250 x 240 x 177 mm
Weight:	3.3 kg



MOONFLOWER

9 W TRI COLOUR LED LIGHTING EFFECT

- ▶ 9 W Ultra High Power TRI RGB LED
- ▶ Low Power Consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Universal mounting bracket included
- ▶ Sturdy metal housing

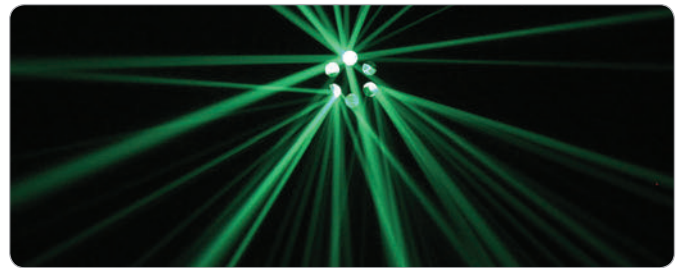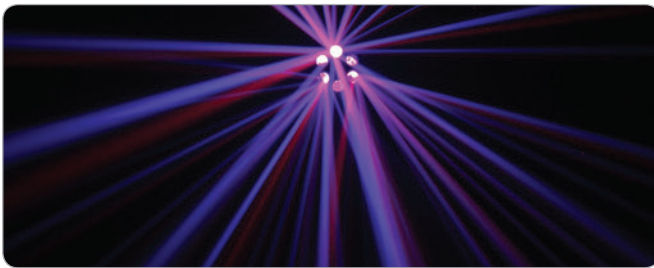

SPECIFICATIONS

Product Number:	CLM0VER1
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGB
Number Of LEDs:	1
LED Type:	9 W TRI Colour
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4-Channel
DMX Functions:	Clockwise Fast & Slow, Colour Selection, Counter Clockwise Fast & Slow, Dimmer, No Rotation, Strobing Fast & Slow
Standalone Modes:	Auto Run, Sound Control

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	250 x 240 x 177 mm
Weight:	4.0 kg
Features:	6 Lenses For Razor-Sharp Light Beams



SUPERFLY HP

5 x 10 WATT RGBWA
HIGHPOWER LED EFFECT

- ▶ 5 x 10 Watt RGBWA High Power LEDs
- ▶ Low Power Consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included



SPECIFICATIONS

Product Number:	CLSUPERFLYHP
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBWA
Number Of LEDs:	5
LED Type:	10 W RGBWA
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5-Channel
DMX Functions:	Clockwise Fast & Slow, Colour Selection, Counter Clockwise Fast & Slow, Dimmer, No Rotation, Strobing Fast & Slow

Standalone Modes:	Auto Run, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	260 x 225 x 300 mm
Weight:	5.5 kg



SUPERFLY XS

2-IN-1 DERBY EFFECT AND STROBE INCL. IR-REMOTE

- ▶ 2 FX in 1: derby effect and Strobe
- ▶ RGBW flower effect with four 3 W LEDs
- ▶ Strobe with 16 ultra-bright white 0.5 W LEDs
- ▶ 2 DMX Modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Each effect individually usable
- ▶ Low-Noise Fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included



SPECIFICATIONS

Product Number:	CLSUPERFLYXS
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGBW
Number Of LEDs Derby Effect:	4
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	16
LED Type Strobe:	0.5 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 5-Channel
DMX Functions:	Auto Programs, Derby, Sound Programs, Strobe


Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	202 x 168 x 142 mm
Weight:	1.6 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Security Lock Slot



SUPERFLY FX

2-IN-1 LED DERBY EFFECT WITH GRATING LASER

- ▶ 2 FX in one: derby effect and grating laser
- ▶ RGBW derby effect with four 3 W LEDs
- ▶ 100mW red and 30mW green class 3R grating laser
- ▶ Each effect individually usable
- ▶ 2 DMX Modes, sound activation and Auto Run programs
- ▶ Master, slave and standalone operation
- ▶ Interlock connector and key switch
- ▶ Low-Noise Fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included

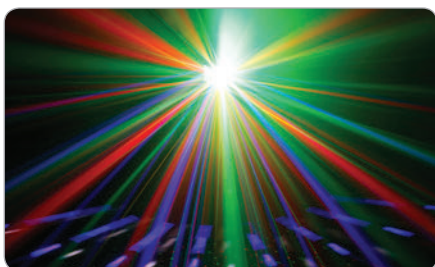

SPECIFICATIONS

Product Number:	CLSUPERFLYFX
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBW
Number Of LEDs:	4
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Lock Switch, Remote Connection
LED Type:	3 W
Colour Spectrum Laser Effect:	Green (532 nm) , Red (650 nm)
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 8-Channel
DMX Functions:	Derby, Derby Motor, Derby Program, Laser, Laser Motor, Laser Program, Stroboscope
Standalone Modes:	Auto Programs, Sound Programs


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	220 x 140 x 169 mm
Weight:	1.6 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Optional Remote Switch, Rubber feet, Security Lock Slot , Short-Circuit Connector For Remote Connection Included



SERUM

3-IN-1 DERBY, MOONFLOWER AND STROBE EFFECT LIGHT

- ▶ 3-in-1 LED Hybrid Effect Light
- ▶ Derby effect with 2 x 9W RGB LEDs
- ▶ Moonflower effect with 64 x 5mm LEDs (16 red, green, blue, white respectively)
- ▶ Strobe effect with 36 x 5mm LEDs
- ▶ Individual DMX, automated or sound control of each effect
- ▶ 3 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation

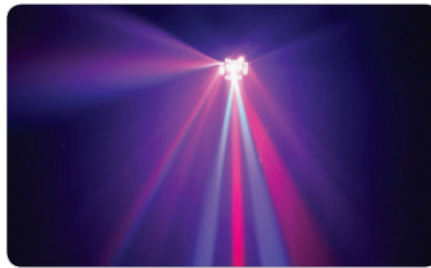

SPECIFICATIONS

Product Number:	CLSERUM
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGB
Number Of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	white
Number Of LEDs Strobe:	36
LED Type Strobe:	5 mm
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 7-Channel
DMX Functions:	Auto Programs, Derby, Flower, Sound Programs Strobe



Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 – 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	245 x 240 x 240 mm
Weight:	3.205 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



VOODOO

2-IN-1 DERBY AND STROBE EFFECT LIGHT

- ▶ 2-in-1 LED Hybrid Effect Light
- ▶ Derby effect with 20 x 3W RGBA LEDs and single pixel control
- ▶ Strobe effect with 12 x 1W LEDs
- ▶ Individual DMX, automated or sound control of each effect
- ▶ 3 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote

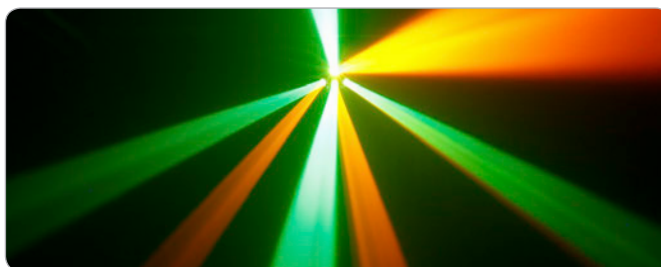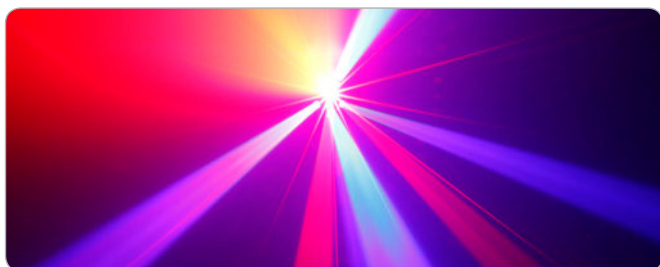

SPECIFICATIONS

Product Number:	CLV00D00
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGBA
Number Of LEDs Derby Effect:	20
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	12
LED Type Strobe:	1 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 8-Channel
DMX Functions:	Derby, Auto Programs, Sound Programs, Strobe
Standalone Modes:	Auto Programs, Sound Programs



Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	275 x 290 x 280 mm
Weight:	4.214 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



ARA

DERBY MATRIX BEAM LIGHT

- ▶ 24 x 3W RGBA Derby Effect
- ▶ Individual DMX control of all 24 LEDs
- ▶ 4 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote

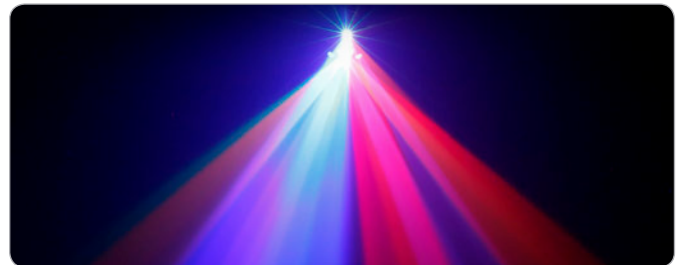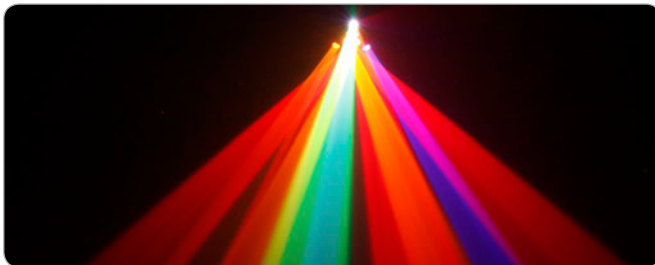

SPECIFICATIONS

Product Number:	CLARA
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBA
Number Of LEDs:	24
LED Type:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 8-Channel
DMX Functions:	Auto Programs, Sound Programs, Matrix Beam
Standalone Modes:	Auto Programs, Sound Programs



Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	210 x 360 x 310 mm
Weight:	4.05 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



EYE-EYE

DERBY MATRIX BEAM LIGHT

- ▶ 24 x 3W RGBA Derby Matrix Effect
- ▶ Individual DMX control of all 24 LEDs
- ▶ 4 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation

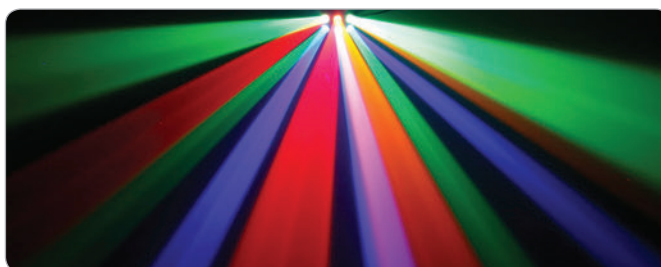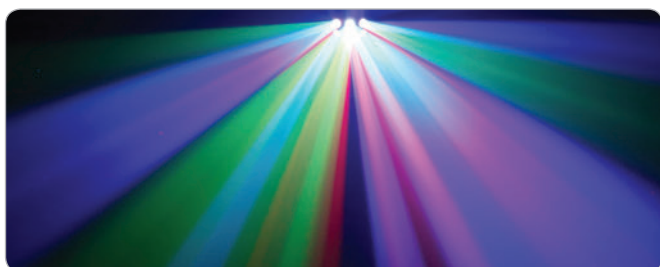

SPECIFICATIONS

Product Number:	CLEYEEYE
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBA
Number Of LEDs:	24
LED Type:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 8-Channel
DMX Functions:	Derby, Auto Programs, Sound Programs, Strobe
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Dimensions (W x H x L):	265 x 185 x 165 mm
Weight:	3.635 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



WAYFARER

FOUR EYES DERBY MATRIX BEAM LIGHT


- ▶ 16 x 3W RGB A Four Eyes Derby Matrix Effect
- ▶ Individual DMX control of all 16 LEDs
- ▶ 4 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote



SPECIFICATIONS

Product Number:	CLWAYFARER
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGB A
Number Of LEDs:	16
LED Type:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 6-Channel
DMX Functions:	Auto Programs, Sound Programs, Matrix Beam
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	400 x 135 x 165 mm
Weight:	2.88 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot

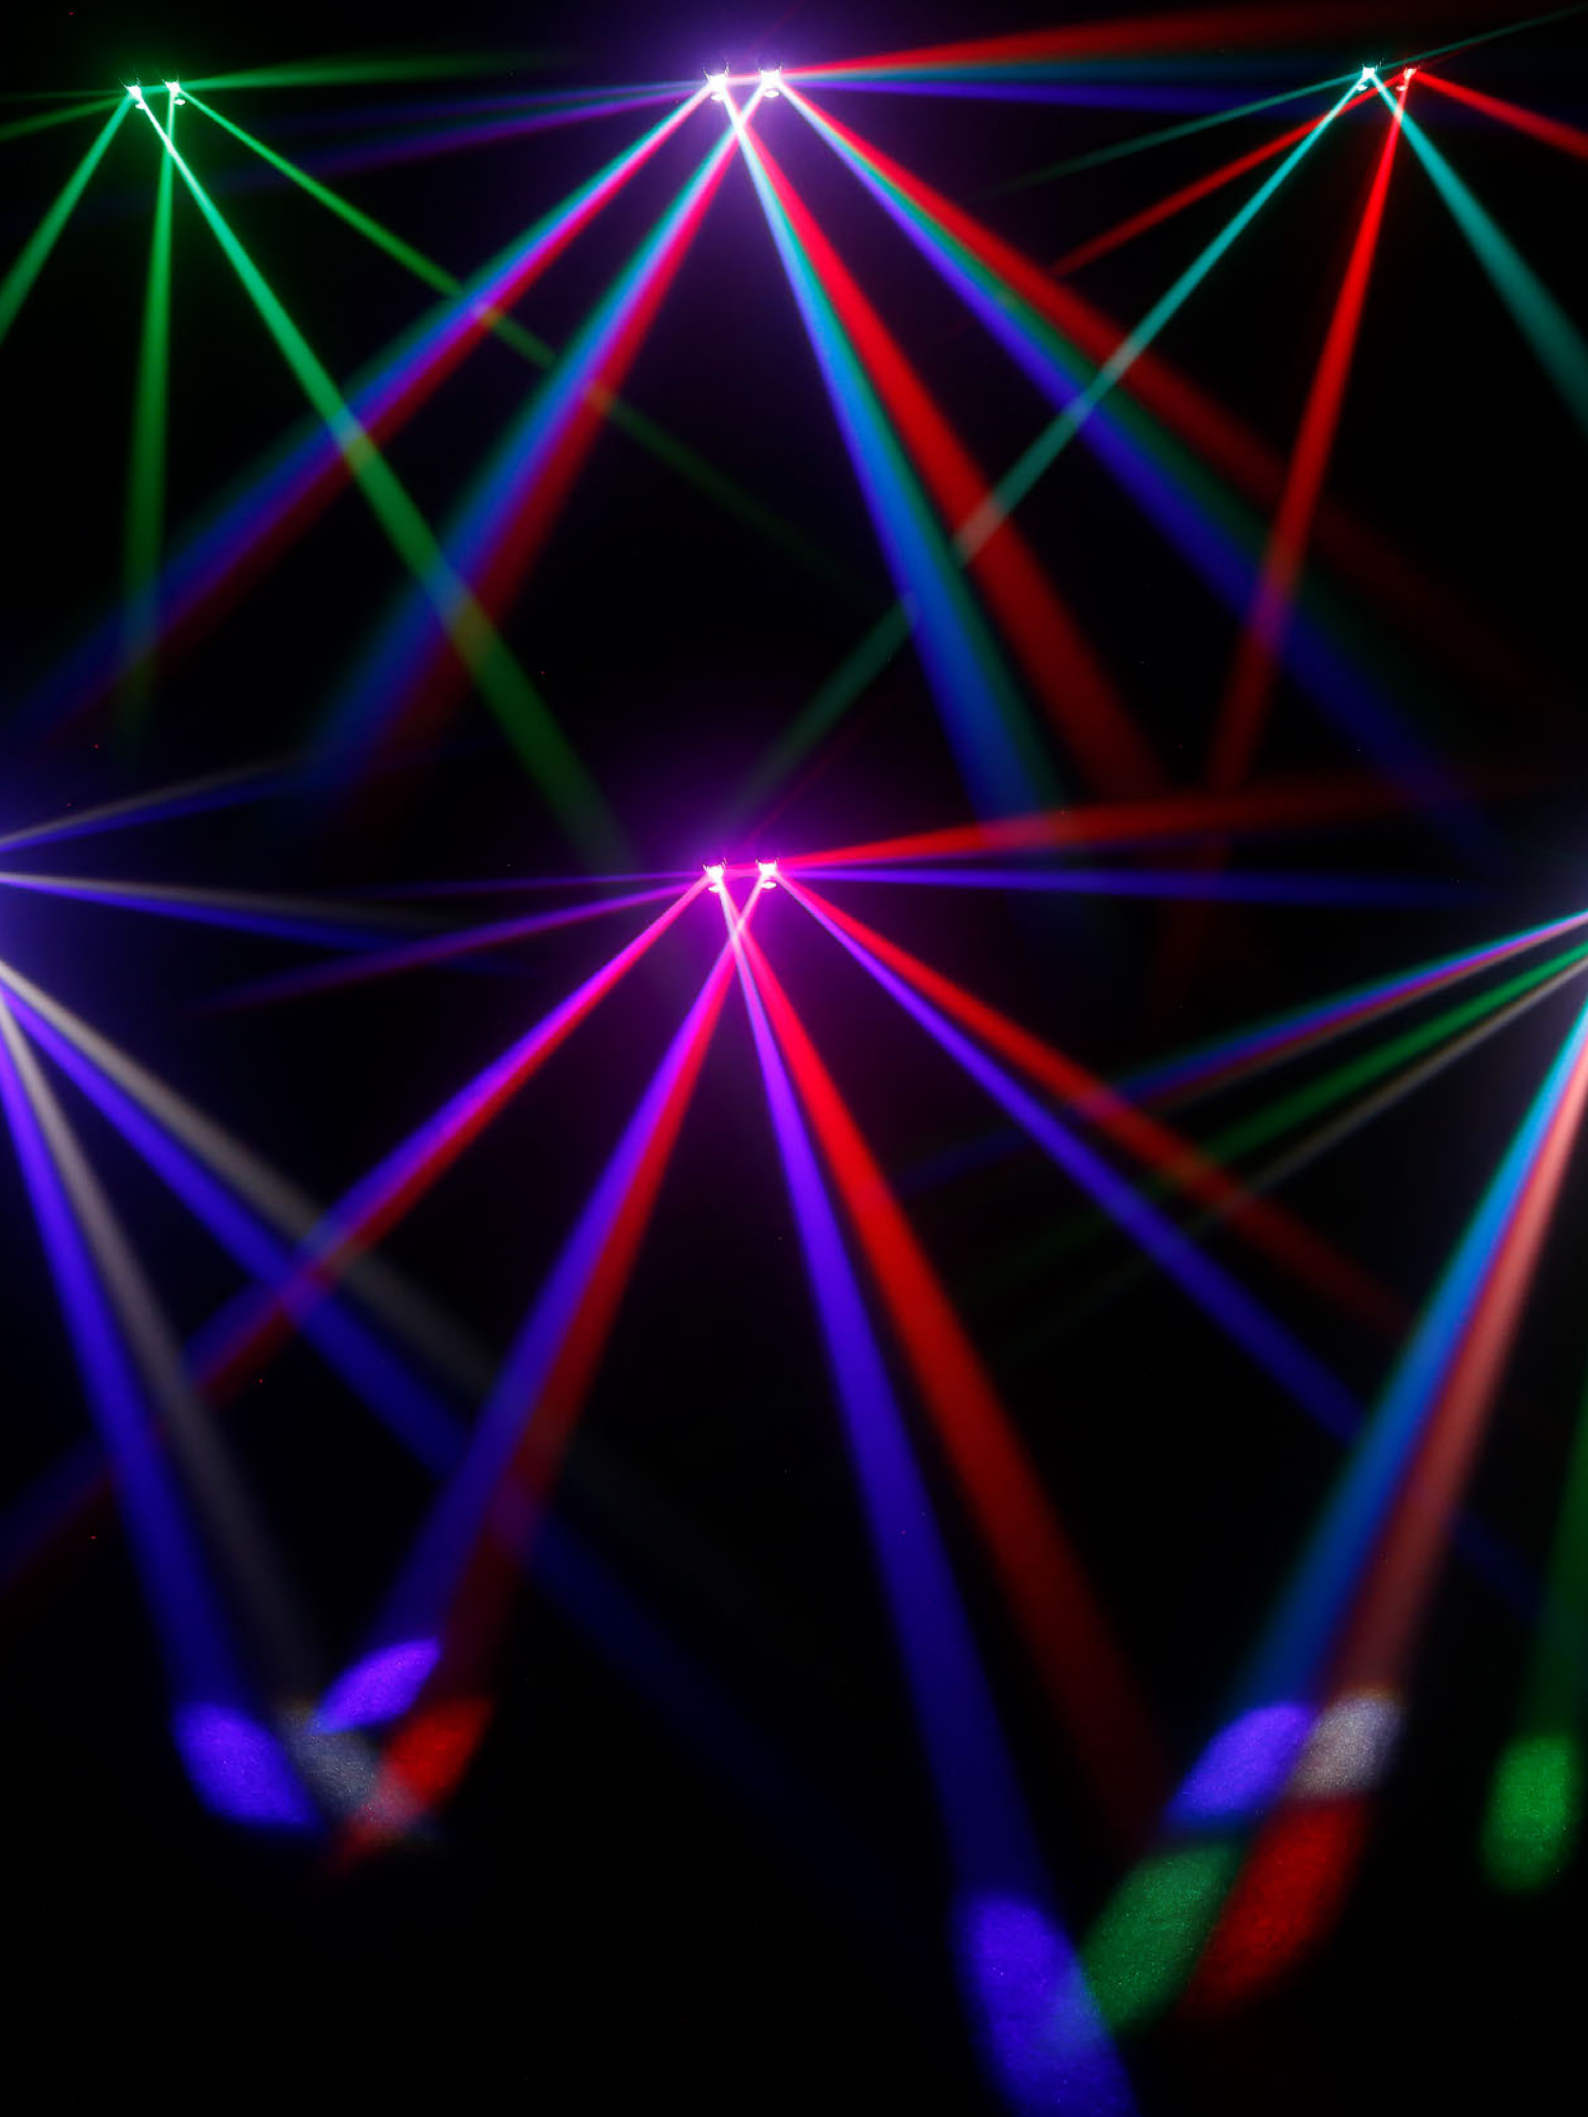

LED SCANNERS

Light every corner of the room and start your own creation of brightness. An LED scanner makes it possible. This is a multifunctional headlight which shatters light beams over the room by reflecting it onto a moveable mirror. Generous tilting angles as well as a very flexible use of the mirrors support a variety of lighting creations – manually and automatically. Gobos, which are attachments, enlarge these varieties even further. They can add patterns, words or pictures. A strong performance, low energy consumption and very lively, intensive colour impressions – these are the distinct features of the LED scanner. LED scanners are an essential part of Modern lighting, especially in discoteques. Professional and creative lighting needs professional and creative tools.

NEW



NANO ROLL 100

BARREL SCANNER WITH 7 GOBOS

- ▶ Miniature barrel scanner with gobo wheel
- ▶ Single high-power 10W Cree LED
- ▶ Precision high-speed rotation and pan for vibrant effects
- ▶ Gobo wheel with 7 gobos + open
- ▶ Colour wheel with red, orange, yellow, green, cyan, magenta and blue filters + open
- ▶ Gobo and colour wheels individually controllable
- ▶ Dimming, high-speed strobe, shutter and gobo shake functions
- ▶ 3 DMX modes plus master and slave operation
- ▶ 17 auto run programs and built-in microphone for sound activation
- ▶ 4-button display for easy configuration and manual



SPECIFICATIONS

Product Number:	CLNROLL100
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	8-channel multi colour
Number Of LEDs:	1
LED Type:	10 W
Number of gobos:	7 + open
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 8, 10-Channel
DMX Functions:	Adjustable audio sensitivity, Auto programs, Colour wheel, Dimmer, Gobo wheel, PAN, Pan speed, Reset, Roll, Sound control, Speed, Strobe
PAN Movement:	180°
TILT Movement:	Unlimited


High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto run, Show, Sound control
Controls:	-, +, Enter, mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Input And Output
Max. Output Current:	3 A
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Protection Class IP:	IP20
Cooling:	Convection
Max. Ambient Temperature:	32 °F - 40°
Dimensions (W x H x L):	130 x 339 x 129 mm
Weight:	2.3 kg



NANO ROLL 200

DOUBLE LED MINI BARREL SCANNER 2 x 10 W RGBW

- ▶ Miniature Double Barrel Scanner with 2 high-power 10W RGBW LEDs
- ▶ 2 independently controllable stepper motors for accurate positioning
- ▶ Extremely fast 180° pan and Unlimited tilt
- ▶ 5 DMX Modes plus Standalone, Master and Slave operation
- ▶ Sound Activation and Auto Mode with amazing built-in programs
- ▶ High-speed Strobe and dimmer functions
- ▶ Convection Cooling
- ▶ 4-button LED Display for easy configuration

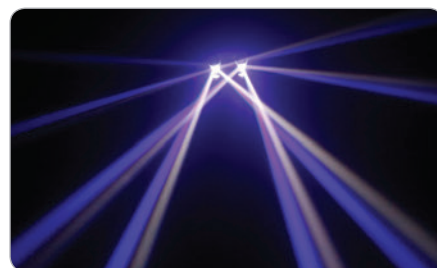

SPECIFICATIONS

Product Number:	CLNROLL200
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	RGBW
Number Of LEDs:	2
LED Type:	10 W
Dispersion:	4°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 4, 11, 16, 19-Channel
DMX Functions:	Dimmer, Auto Programs, Sound Programs, Strobe, PAN, TILT
Wireless DMX:	No
PAN Movement:	180°
TILT Movement:	Unlimited

High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	IEC Power Input And Output
Max. Output Current:	4 A
Housing Material:	ABS Plastic , Metal
Cabinet Colour:	Black
Protection Class IP:	IP20
Cooling:	Convection
Max. Ambient Temperature:	0° - 40°
Dimensions (W x H x L):	275 x 300 x 143 mm
Weight:	3.7 kg


NEW



NANO SCAN 100

LED MINI GOBO SCANNER 10W

- ▶ Miniature Gobo Scanner with single high-power 10W LED
- ▶ Precise high-speed pan and tilt for vibrant beam movement
- ▶ Colour Wheel with red, orange, yellow, green, cyan, magenta and blue filters + open
- ▶ Gobo wheel with 7 gobos + open
- ▶ Gobo and Colour Wheels independently controllable
- ▶ Dimmer, high-speed Strobe, shutter and gobo shake functions
- ▶ 3 DMX Modes plus master and slave operation
- ▶ 17 Auto Run programs and built-in microphone for sound activation
- ▶ 4-button display for easy configuration and manual

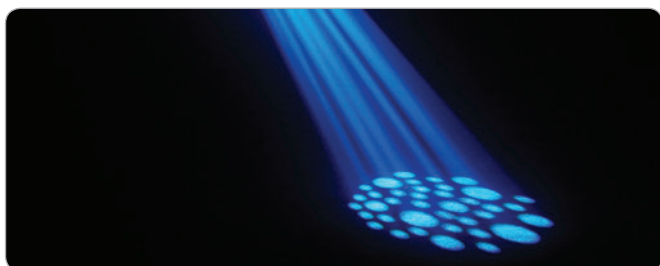

SPECIFICATIONS

Product Number:	CLNSCAN100
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	8-Channel Multi Colour
Number Of LEDs:	1
LED Type:	10 W
Dispersion:	12°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 8, 10-Channel
DMX Functions:	Adjustable Audio Sensitivity, Auto Programs, Colour Wheel, Dimmer, duration, Gobo Wheel, PAN, Reset, Pan speed, Sound Control, Strobe, TILT, Tilt Speed
Wireless DMX:	No
PAN Movement:	160°
TILT Movement:	90°
High Speed Strobe:	1 - 20 Hz



Standalone Modes:	Auto Run, Show, Sound Control
Controls:	Enter , Mode , Value Down , Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Input And Output
Max. Output Current:	3 A
Housing Material:	ABS Plastic , Metal
Cabinet Colour:	Black
Protection Class IP:	IP20
Cooling:	Convection
Illuminance:	4,600 lx @ 1m
Max. Ambient Temperature:	0° - 40°
Dimensions (W x H x L):	130 x 293 x 119 mm
Weight:	2.3 kg



QUAD ROLL 40

4-HEAD BARREL SCANNER

- ▶ 4-head barrel scanner with four 10W Cree RGBW LEDs
- ▶ Quiet, high-quality stepper motors
- ▶ Adjustable barrel rotation speed
- ▶ 4 Modes of DMX control plus sound activation
- ▶ Master, slave and standalone operation
- ▶ 16 automated light shows
- ▶ Dimmer and high-speed Strobe functions
- ▶ 4-button display for easy operation
- ▶ Universal mounting bracket

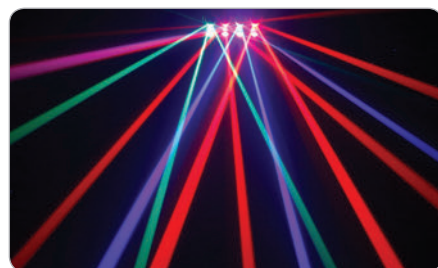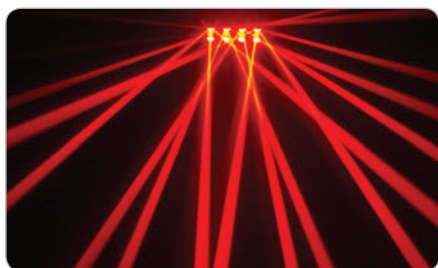

SPECIFICATIONS

Product Number:	CLQR40
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	RGBW
Number Of LEDs:	4
LED Type:	10 W Cree
Dispersion:	4.5°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 4, 12, 18-Channel
DMX Functions:	Auto 1-16, Barrel Movement, Colour Macro, Dimmer, Sound Control, Strobe
High Speed Strobe:	1 - 20 Hz

Standalone Modes:	Auto 1-16, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	Blue 6,000lx @ 1m, Green 23,500lx @ 1m, Red 17,300lx @ 1m, White 41,300lx @ 1m
Dimensions (W x H x L):	462 x 221 x 137 mm
Weight:	5 kg

Featuring




CREE 
LEDs

TWIN SCAN 20

DUAL 10W CREE LED GOBO SCANNER



- ▶ 2 individually controllable gobo scanners in a single enclosure
- ▶ Powerful white 10 watt Cree LEDs
- ▶ Each scanner with 9 brilliant colour/gobo combinations + open/white
- ▶ Manual focus adjustment
- ▶ 4 Modes of DMX control
- ▶ Master, slave or standalone operation
- ▶ Automated programs and sound control
- ▶ LED Display with 4 function keys for easy menu navigation
- ▶ Black metal enclosure with hanging bracket and safety eye

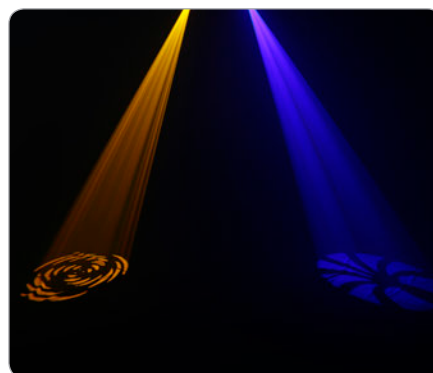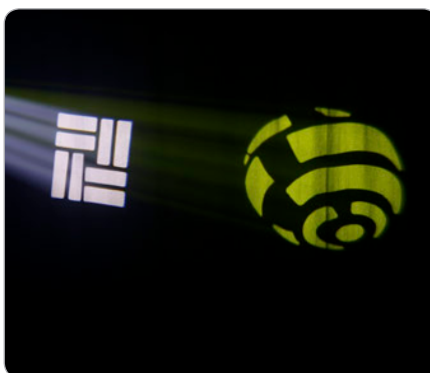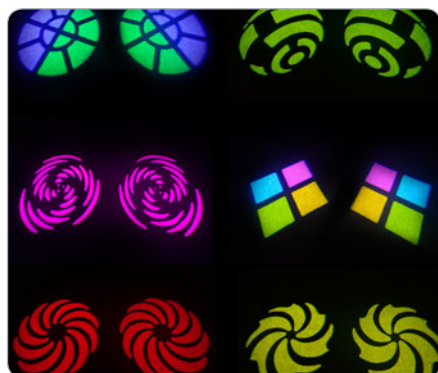

SPECIFICATIONS

Product Number:	CLTWINSKAN20
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	9 colours + white
Number Of LEDs:	2
LED Type:	10 W
Dispersion:	12°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 3, 4, 8-Channel
DMX Functions:	Auto 1-16, Barrel Movement, Colour Macro, Dimmer, Sound Control, Strobe
PAN Movement:	55
High Speed Strobe:	1 - 20 Hz

Standalone Modes:	Auto 1-9, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	2,400 lx @ 1m
Dimensions (W x H x L):	545 x 151 x 180 mm
Weight:	5 kg




G SCAN 80

LED GOBO SCANNER 80 W

NEW


- ▶ State-of-the-art LED technology for ultra bright 40,000 lx illuminance
- ▶ Extra smooth pan and tilt with 16-bit precision resolution
- ▶ Colour wheel with Warm Yellow, Lavender, Lime, Cyan, Amber, Yellow, Blue, Green
- ▶ Gobo wheel with 9 gobos + open spot
- ▶ Gobo and colour wheels independently controllable
- ▶ 9-channel and 12-channel DMX control
- ▶ Dimming, high-speed strobe, shutter and gobo shake effects
- ▶ 12 auto-run programs and built-in microphone for sound activation
- ▶ 4-button display for easy configuration and manual control

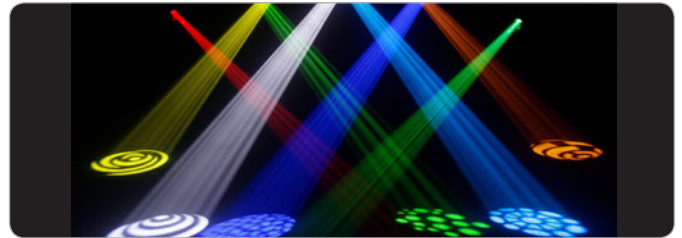

SPECIFICATIONS


Product Number:	CLSCAN80W
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	9 Channel Multi Colour Wheel
Number Of LEDs:	1
Colour temperature:	24000 K
Rated avg. life span LED:	50000 hrs.
LED type:	80 W
Refresh rate:	6,000 Hz
Dispersion:	12 °
Number of gobos:	9 + open
DMX Input / Output	XLR 3-pin male / female
RDM:	no
Protocols:	USITT DMX-512
DMX Mode:	9, 12-channel
DMX Functions:	Colour wheel, Continuous operation, Device settings, Dimmer, Gobo Wheel, PAN, PAN FINE, Pan/Tilt Macros, Pan/Tilt Speed, Strobe, TILT, TILT FINE
Wireless DMX:	no
PAN movement:	180°

TILT movement:	90°
High Speed Strobe:	no Hz
Standalone modes:	Auto run ,Sound control
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	4-digit LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	130 W
When 110V/ 240, how many pcs can be connected:	5 / 5
Fuse:	F3AL
Power Connector:	IEC Power Connector Male
Power through connector:	IEC power connector female
Max. output current:	6 A
Housing Material:	ABS plastic , metal
Cabinet Colour:	Black
Protection class IP:	IP20
Cooling:	temperature-controlled fan
Illuminance:	40,000lx @ 1m
Luminous flux:	1,000 lm
Humidity Range:	not condensing
Dimensions (W x H x L):	190 x 450 x 150 mm
Weight:	4.9 kg

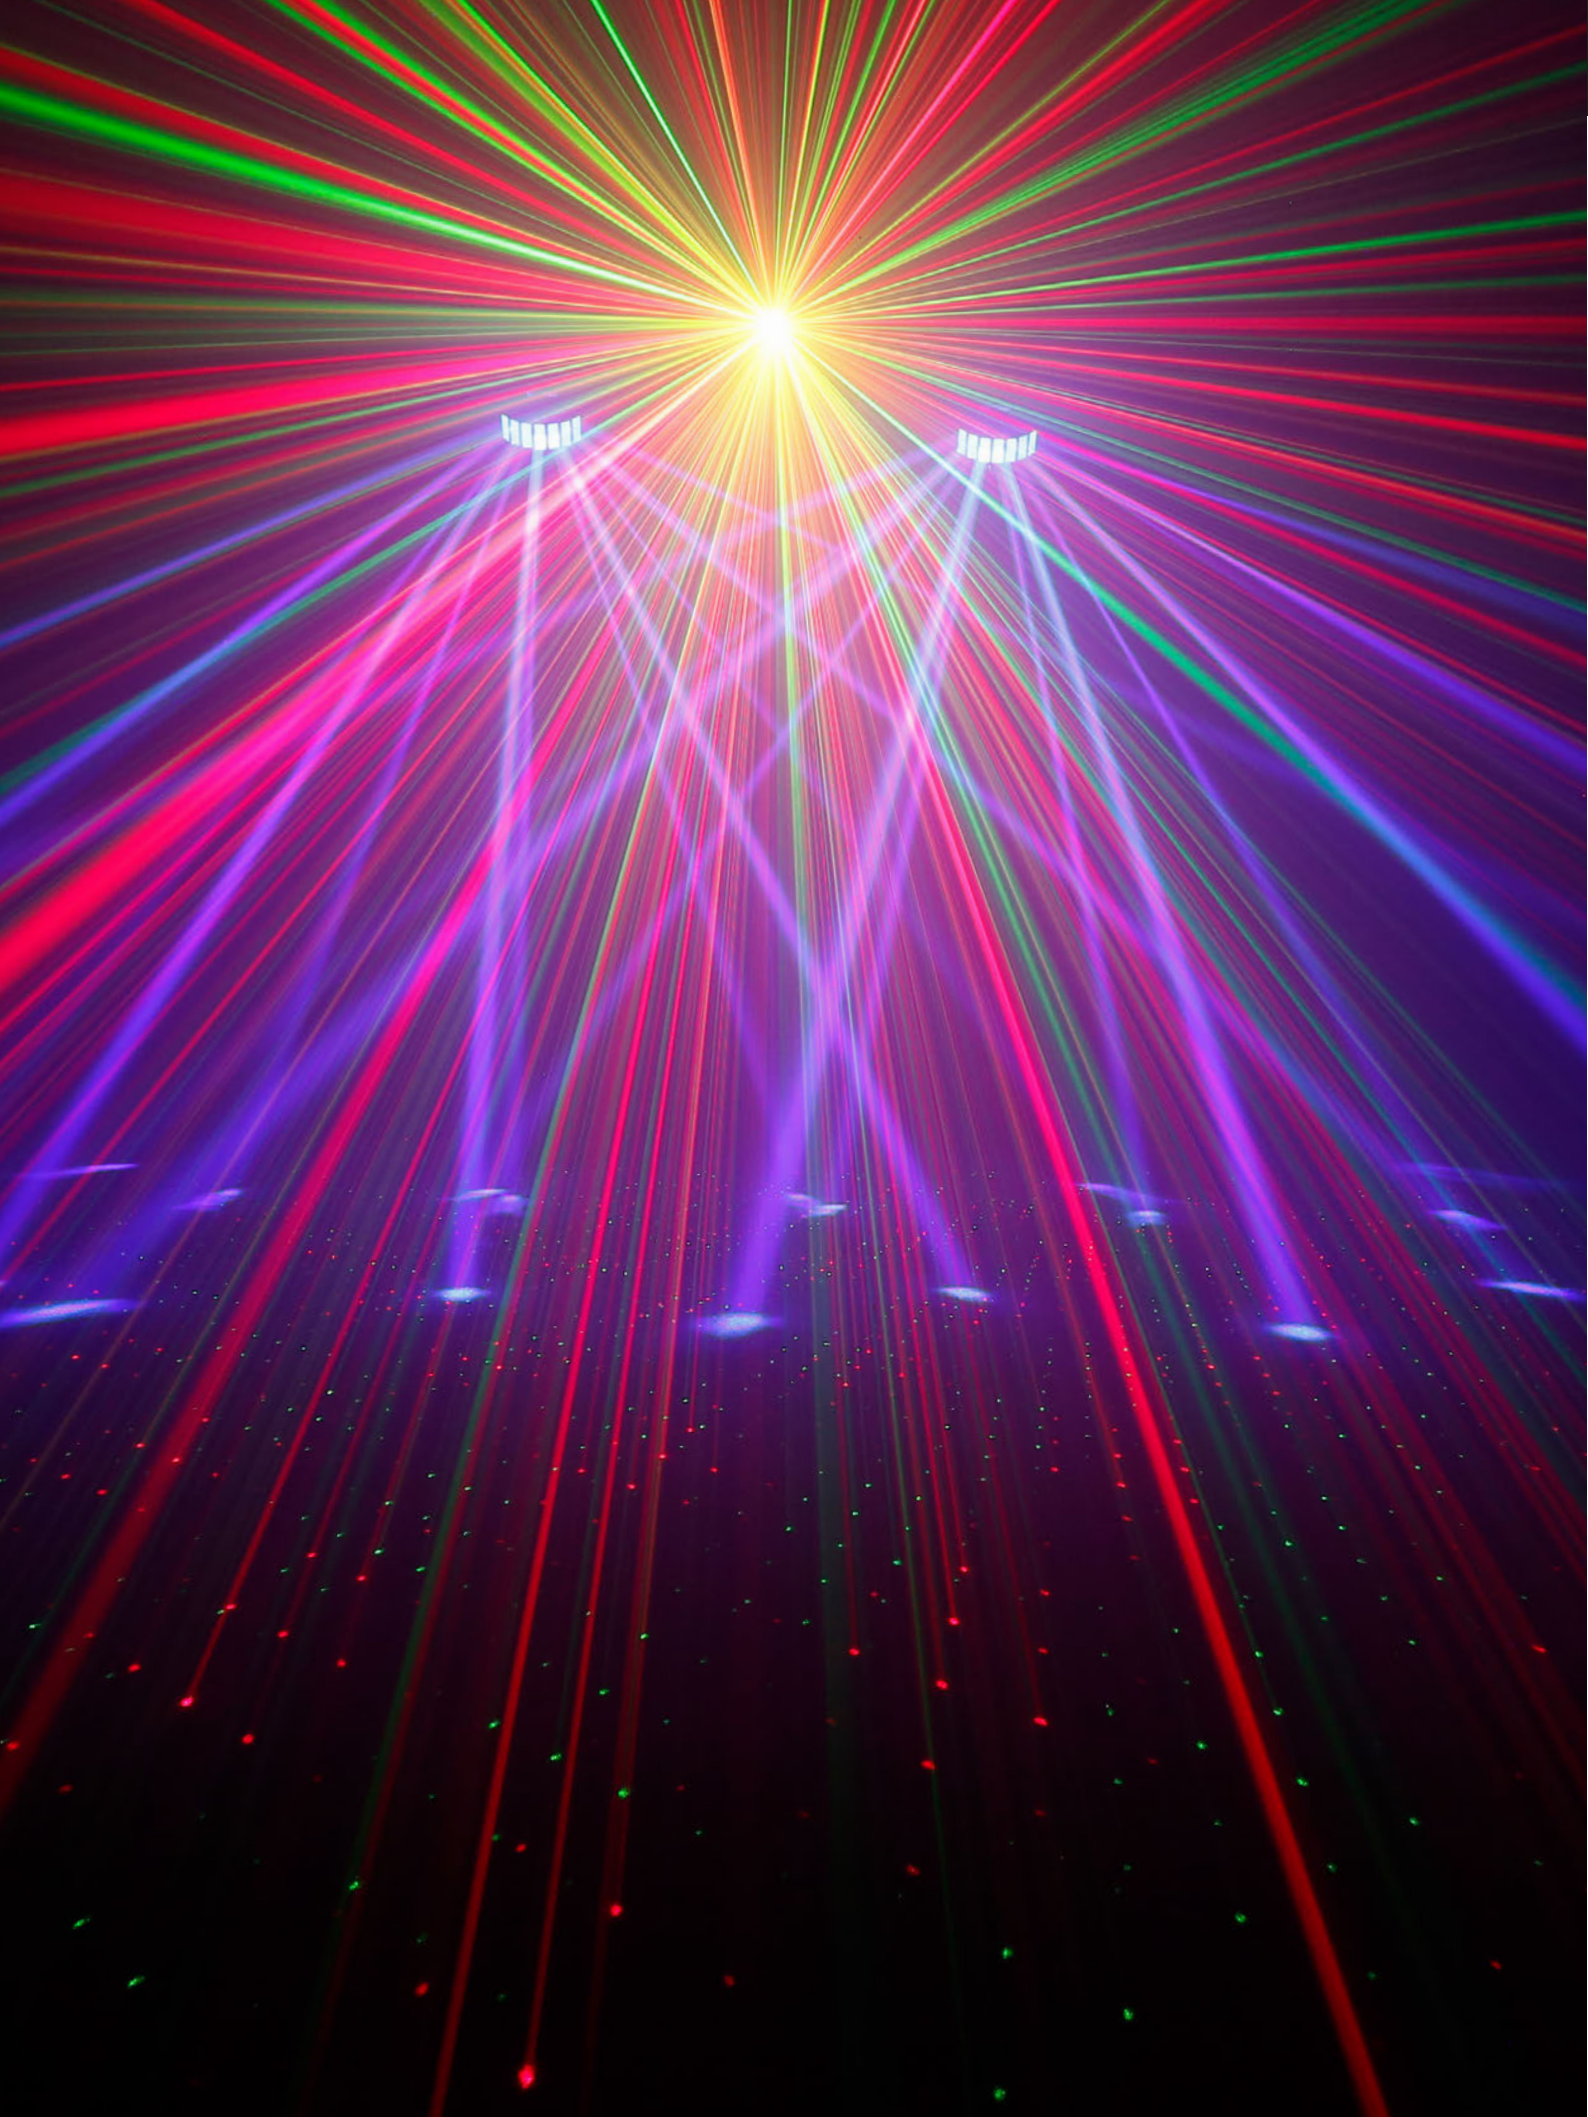


LED LIGHT SETS

It is the ideal lighting solution for clubs, live performers and DJs: the LED PAR set. Usually, four headlights are fixed to a strong bar and form a lighting system. It is an especially popular device for events because of its advantages. An LED PAR set is built up fast with a tripod. It can also be part of a bigger lighting system by clipping it to a rail.

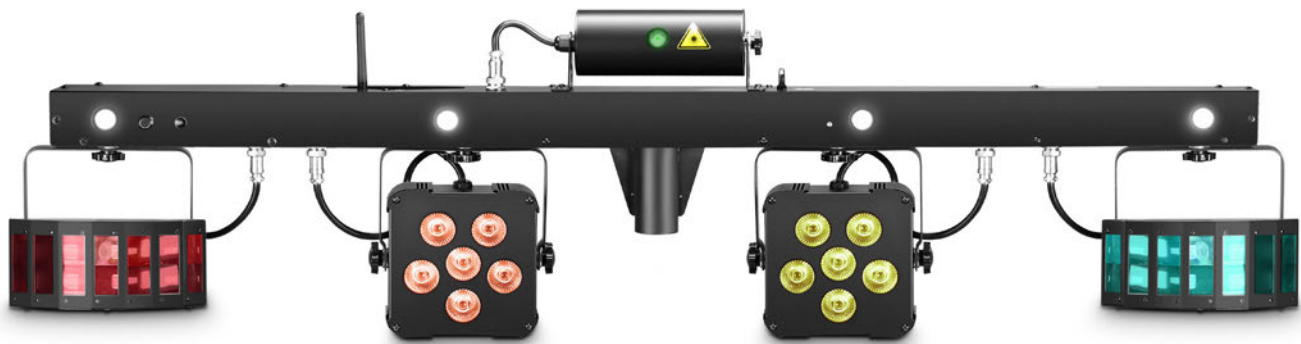

Stand is not included.

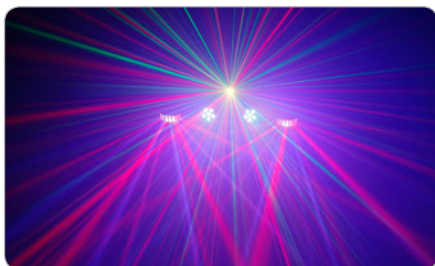

MULTI FX BAR

ALL-IN-ONE SOLUTION WITH 5 LIGHTING EFFECTS
FOR MOBILE DJS, ENTERTAINERS AND BANDS

FEATURES



- ▶ All-in-one lighting system with 5 intense effects including 2 brilliant LED PAR cans, 2 rotating LED derbies, 4 Strobe LEDs, a grating laser and UV light
- ▶ Pre-mounted to a bar with Pole insert for instant set-up and use
- ▶ Includes a convenient carry bag, wireless footswitch, infrared remote control and truss Mounting Brackets
- ▶ 46 built-in programs for mesmerizing light shows that include all 5 effects
- ▶ Multiple control options including a 4-button display, DMX, infrared remote, wireless footswitch, sound activation and automatic operation
- ▶ All effects usable individually and in combinations



SPECIFICATIONS

Product Number:	CLMFXBAR
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Laser Effects
Spot Colour Spectrum:	RGB+UV 12 W
Number Of Spot LEDs:	12
Colour Spectrum Derby Effect:	RGB
Number Of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Colour Spectrum Laser Effect:	Green (532 nm), Red (650 nm)
Number Of Diodes Laser Effect:	1 x Green, 1 x Red
Type of Diodes Laser Effect:	red 150 mW, Green 50 mW (DPSS Laser)
Laser Class:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Lock Switch
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	4
LED Type Strobe:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female

DMX Functions:	Auto Programs, Derby, Laser, Sound Sensitivity, Strobe
DMX Mode:	2, 5, 29-Channel
Standalone Modes:	Auto Programs, Colour, Slave Mode, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	IEC Power Input And Output
Power Consumption:	120 W
Fuse:	T 3.15 A
Max. Ambient Temperature:	120 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	1100 x 60 x 60 mm
Weight:	6.3 kg
Features:	IR Remote, Key Switch With 2 Keys, Mounting Brackets, Truss Mounting Angles And Interlock Connector For Optional Emergency Stop Switch, Wireless Footswitch With 12V 23AE Battery

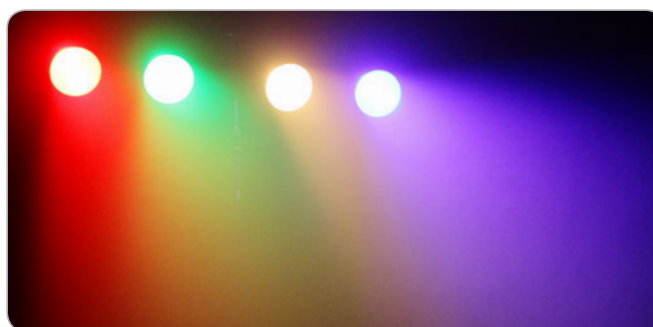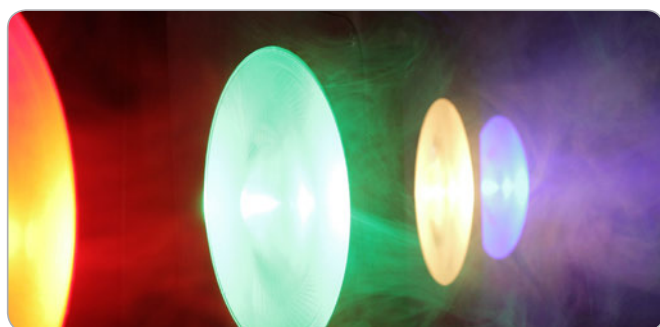

MULTI PAR COB 1 / SET 2

COMPACT 4 x 30 W RGB COB LED LIGHTING SYSTEM
INCL. TRANSPORT CASE OR IN A SET WITH
TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

FEATURES

- ▶ 4 x 30W ultra-bright RGB LEDs
- ▶ COB Technology for smooth colour mixing
- ▶ Professional 28-mm TV adapter for mounting
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave Mode, standalone Mode, IR-Remote or foot switch (optional or included in Set)
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Heavy duty aluminium housing
- ▶ Installation points and switchable power plugs for 2 additional lights
- ▶ transport case included



SPECIFICATIONS

Product Number: CLMPARCOB1 / CLMPARCOB1SET2

Product Type: LED Lighting Systems

Spot Colour Spectrum: RGB

Number Of LEDs: 4 x 1

LED type: 30 W COB

Dispersion: 50°, (with the supplied lens set) 25°

DMX input / Output: XLR 3-pin male / XLR 3-pin female

DMX mode: 5-channel, 7-channel, 12-channel, 8-channel, 17-channel, 4-channel, 3-channel, 6-channel

DMX Functions: strobe, sound control, master dimmer, 13 Programs, switchable power sockets 1/2, RGB

Standalone modes: slave mode, Auto run, static colour, sound control, strobe, 13 Programs

Remote connection: XLR 5-pin female

Controls: Enter, mode, Value Up, Value Down

Indicators: multifunction LC display

Operating voltage: 90 V AC - 240 V AC, 50 - 60 Hz

Power consumption: 120 W

Power connector: Neutrik PowerCon

Housing material: Metal

Cabinet colour: Black


TV spigot: 28 mm

Dimensions (W x H x L): 1005 x 285 x 80 mm

Weight: 9 kg, 18,45 kg (Set)

Features: IR Remote, Installation points for 2 additional lights, Neutrik PowerCON output

Accessories (included): Power cord 3m (Neutrik PowerCON), IR-Remote, transport case

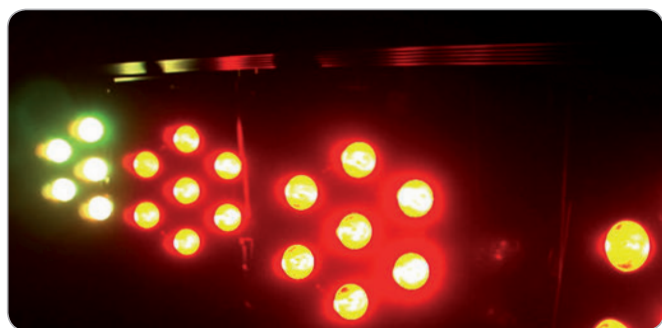

MULTI PAR 2 / SET 3

COMPACT 28 x 3 W TRI COLOUR LED LIGHTING SYSTEM
INCL. TRANSPORT CASE OR IN A SET WITH
TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

FEATURES

- ▶ 4 x 7 ultra-bright 3 W TRI RGB LEDs
- ▶ Professional 28-mm TV spigot for mounting
- ▶ Operated via DMX, in master/slave Mode, standalone Mode or via footswitch (optional or included in Set)
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Sturdy metal housing
- ▶ transport case included



SPECIFICATIONS

Product Number:	CLMPAR2 / CLMPAR2SET3
Product Type:	LED Lighting Systems, LED Lighting Systems, LED Lighting System Accessories, Stands and Tripods
Type:	Indoor, Lighting Stands
Colour Spectrum:	RGB
Number of LEDs:	4 x 7
LED type:	3 W TRI Colour
Dispersion:	25°
DMX Input / Output:	XLR 3-pin male / XLR 3-pin female
DMX mode:	9-channel, 6-channel, 15-channel
DMX Functions:	Master dimmer, colour jump, strobe, sound control, RGB, colour fade
Standalone modes:	Colour change, colour fade, slave mode, sound control, static colour, Auto run
Remote connection:	XLR 5-pin female

Controls:	Mode, Enter, Value Up, Value Down
Indicators:	Multifunction LC display, static colour, sound control, Program selection
Operating voltage:	100 V AC - 250 V AC
Power consumption:	100 W
Power connector:	IEC power connector female, IEC power connector male
Housing material:	Metal
Cabinet colour:	Black
Illuminance:	5,450lx @ 1m
TV spigot:	28 mm
Dimensions (W x H x L):	1030 x 290 x 100 mm
Weight:	8 kg, 17,45 kg (Set)
Accessories (included):	Transport case



CLMPAR3 SET 3
with stand and footswitch



MULTI PAR 3 / SET 3

COMPACT 28 x 8 W QUAD COLOUR LED LIGHTING SYSTEM INCL. TRANSPORT CASE OR IN A SET WITH TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

FEATURES

- ▶ 4 x 7 ultra-bright 8 W QUAD RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Professional 28-mm TV adapter for mounting
- ▶ Optional footswitch for easy on stage controlling
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Heavy duty aluminium housing
- ▶ Practical transport case included



SPECIFICATIONS

Product Number:	CLMPAR3 / CLMPAR3SET3
Product Type:	LED Lighting Systems, LED Lighting Systems, LED Lighting System Accessories, Stands and Tripods
Type:	Indoor, Lighting Stands
Colour Spectrum:	RGBW
Number of LEDs:	4 x 7
LED type:	8 W QUAD Colour
Dispersion:	25°
DMX Input / Output:	XLR 3-pin male / XLR 3-pin female
DMX mode:	9-channel, 4-channel 1, 21-channel, 16-channel, 4-channel 2, 6-channel, 8-channel
DMX Functions:	RGBW, Program, master dimmer, strobe, sound control, switchable power sockets 1/2
Standalone modes:	static colour, sound control, Auto run, slave mode, colour change, colour fade, Dimmer Mode

Remote connection:	XLR 5-pin female
Controls:	Mode, Enter, Value Up, Value Down
Indicators:	multifunction LC display, sound control, Program selection, static colour
Operating voltage:	90 V AC - 250 V AC, 50 - 60 Hz
Power consumption:	210 W
Power connector:	Neutrik PowerCon
Housing material:	Metal
Cabinet colour:	Black
TV spigot:	28 mm
Dimensions (W x H x L):	1030 x 290 x 100 mm
Weight:	9 kg, 18,45 kg (Set)
Features:	Installation points for 2 additional lights, IR Remote, Neutrik PowerCON output, transport case



MULTI PAR 1 / SET 3

COMPACT 432 x 10 MM LED LIGHTING SYSTEM
INCL. TRANSPORT CASE OR IN A SET WITH
TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

FEATURES

- ▶ 4 x 108 powerful, long-life 10 mm RGB LEDs
- ▶ Professional 28-mm TV spigot for mounting
- ▶ Operated via DMX, in master/slave Mode, standalone Mode or via footswitch (optional or included in Set)
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Sturdy metal housing
- ▶ transport case included



SPECIFICATIONS

Product Number:	CLMPAR1 / CLMPAR1SET3
Product Type:	LED Lighting Systems, LED Lighting Systems, LED Lighting System Accessories, Stands and Tripods
Type:	Indoor, Lighting Stands
Colour Spectrum:	RGB
Number of LEDs:	4 x 108
LED type:	10 mm
Dispersion:	25°
DMX Input / Output:	XLR 3-pin male / XLR 3-pin female
DMX mode:	15-channel, 9-channel, 6-channel
DMX Functions:	Master dimmer, strobe, colour fade, colour jump, sound control, RGB
Standalone modes:	Sound control, static colour, colour change, Auto run, slave mode, colour fade
Remote connection:	XLR 5-pin female

Controls:	Mode, Enter, Value Up, Value Down
Indicators:	multifunction LC display, Program selection, sound control, static colour
Operating voltage:	100 V AC - 250 V AC
Power consumption:	50 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Cabinet colour:	Black
TV spigot:	28 mm
Dimensions (W x H x L):	1030 x 290 x 100 mm
Weight:	7 kg, 16,45 kg (Set)
Accessories (included):	Transport case



MULTI PAR FOOT +

4-SWITCH FOOT PEDAL FOR ALL CLMPAR LIGHT SETS

FEATURES

- ▶ Easy on stage control for CLMPAR1, CLMPAR2, CLMPAR3 & CLMPARCOB1
- ▶ Functions: black out, full on, sound control, static colours, light 1/2, Auto Run
- ▶ Rugged metal housing
- ▶ 10 m 5-Pin XLR connection cable included

SPECIFICATIONS

Product Number:	CLMPARFOOTPLUS
Product Type:	LED Lighting System Accessories
Controls:	Blackout, CD / USB / SD, Down, Mode, Up, Microphone sensitivity
Indicators:	Program Selection, Sound Control, Static Colour
Connectors:	5-Pole XLR Socket Male
Dimensions (W x H x L):	291 x 65 x 103 mm
Weight:	1 kg

Suitable for:



CLMPAR1 SET2



CLMPAR2 SET3



CLMPAR3 SET3



CLMPARCOB1 SET2



FOG MACHINES

Sporting an arrangement of 12 colourful RGBA LEDs, Cameo's Steam Wizard 2000 blasts illuminated jets of fog to complement your light show. With top or bottom fluid tank placement and horizontal or vertical mounting options, the powerful fog machine is a stunning performer.



STEAM WIZARD 2000

FOG MACHINE WITH RGBA LEDS FOR COLOURED FOG EFFECTS

FEATURES

- ▶ 1,200 W heating element and high-performance pump for powerful blasts of fog
- ▶ 12 x 10W RGBA 4-in-1 LEDs for uniform fog illumination
- ▶ Vertical or horizontal mounting
- ▶ Top or bottom fluid tank placement options
- ▶ Bottom tank placement enables easy overhead installation for downward jets
- ▶ Automatic shutdown prevents pump damage when fluid tank is empty
- ▶ LED indicators for fluid tank and operating status
- ▶ 4-Channel DMX control
- ▶ Includes handheld remote with illuminated buttons and controls for Continuous Timer, Manual, Fog Output, LED Brightness and Colour plus 10m cable



SPECIFICATIONS

Product Number:	CLSW2000
Product Type:	Fog and Wind Machines
Type:	Fog machine with LEDs
Power:	1200 W
Output volume:	Approx. 500 m³/min
Range Of Fog Output:	Approx. 7 m
Warm-up time:	Approx. 3 min
Fog Duration:	Approx. 10 sec.
Reheating time:	Approx. 8 sec.
Fluid Tank Capacity:	2,5 l
Fluid Consumption:	Approx. 50 ml/min
Number Of LEDs:	12
LED Type:	10 W 4 in 1 LED
Remote Connection:	XLR 5-Pin Male
Remote Cable Length:	10 m

Remote functions:	Duration, Interval, Manual Control, Colour Change, Continuous operation, LED brightness, Output Level
DMX Input / Output:	XLR 3-Pin Male / Female
DMX Mode:	4-Channel
DMX Functions:	Colour Change, Output Level, Colour Fade, Colour Jump, Dimmer, Strobe
Controls:	Mode, Value Up, Enter, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	230 V AC, 50 Hz
Fuse:	F8AL / 250 V
Power Consumption:	1200 W
Power Connector:	IEC Power Connector Female
Housing Material:	Metal
Cabinet Colour:	Black
Dimensions (W x H x L):	300 x 140 x 420 mm
Weight:	9 kg





SNOW FLUID 5L / 15L

SPECIAL FLUID FOR SNOW MACHINES
FOR THE PRODUCTION OF FOAM
CLFSNOW5L
CLFSNOW15L



BUBBLE FLUID 5L

SPECIAL FLUID
FOR GENERATING SOAP BUBBLES
CLFBUBBLE5L



XTRA HEAVY FLUID 5L

FOG FLUID WITH VERY HIGH DENSITY
AND EXTREME LONG STANDING TIME
CLFXHEAVY5L



XTRA HEAVY FLUID 10L

FOG FLUID WITH VERY HIGH DENSITY
AND EXTREME LONG STANDING TIME
CLFXHEAVY10L



DJ FLUID 5L

FOG FLUID WITH MEDIUM DENSITY
AND MEDIUM STANDING TIME
CLFDJ5L



DJ FLUID 10L

FOG FLUID WITH MEDIUM DENSITY
AND MEDIUM STANDING TIME
CLFDJ10L



FINE FLUID 5L

HAZE EFFECT FOG FLUID WITH
VERY LOW DENSITY AND VERY
LONG STANDING TIME
CLFFINE5L



FAST FLUID 5L

FOG FLUID WITH VERY HIGH DENSITY
AND VERY SHORT STANDING TIME
CLFFAST5L



HAZE FLUID 5L

HAZE FLUID FOR FINE FOG DENSITY AND LONG STANDING TIME, OIL-FREE
CLFHAZE5L



HAZE FLUID 10L

HAZE FLUID FOR FINE FOG DENSITY AND LONG STANDING TIME, OIL-FREE
CLFHAZE10L



HEAVY FLUID 5L

FOG FLUID WITH VERY HIGH DENSITY AND VERY LONG STANDING TIME
CLFHEAVY5L



HEAVY FLUID 10L

FOG FLUID WITH VERY HIGH DENSITY AND VERY LONG STANDING TIME
CLFHEAVY10L



INSTANT HAZE FLUID 5L

SPECIAL OIL FREE FLUID FOR CAMEO INSTANT HAZE MACHINES
CLFIH5L



CLEANING FLUID 0.25L

SPECIAL FLUID FOR CLEANING FOG MACHINES
CLFCLEANER250



MADE IN GERMANY!

**BIODEGRADABLE
BIOLOGISCH ABBAUBAR**

READY FOR USE / GEBRAUCHSFERTIG





 **cameo®**
colours of light

ACCESSORIES

With a selection of rugged, high-quality gear bags for convenient transport, IP65 rated cables and a DMX splitter and booster Cameo covers your needs for lighting fixture accessories.



SB 6 DUAL / SB 8.3

6 OR 8-CHANNEL DMX SPLITTER / BOOSTER (3/5-PIN)

FEATURES

- ▶ Professional 6-way DMX Splitter / Booster
- ▶ Chassis 1U 19" rack-mount enclosure
- ▶ 6 electrically isolated XLR (3-Pin / 5-Pin) outputs
- ▶ DMX status indicator per channel
- ▶ Power status indicator
- ▶ Switchable 120 Ohm terminating resistor for the DMX THRU output jack
- ▶ Front and rear rack-mount angle attachment options

SPECIFICATIONS

Product Number:	CLSB6D	CLSB83
Product Type:	Other Lighting Accessories	Other Lighting Accessories
Type:	DMX Splitter / Booster	DMX Splitter / Booster
DMX Inputs:	2 (Parallel)	2 (Parallel)
DMX Input Connectors:	XLR 3-Pin Male, XLR 5-Pin Male	3-Pin XLR Male
DMX Thru Outputs:	2 (Parallel)	2 (Parallel)
DMX Thru Output Connectors:	XLR 3-Pin Male, XLR 5-Pin Male	3-Pin XLR Female
DMX Outputs:	6	8 (Electrically Isolated)
DMX Output connectors:	XLR 3-Pin Male, XLR 5-Pin Male	3-Pin XLR Female
Controls:	DMX Thru Terminator, Power On/Off	DMX Thru Terminator, Power On/Off
Indicators:	6 x Power LED, 6 x Signal LED	8 x Power LED, 8 x Signal LED
Mains Connector:	IEC Power Connector	IEC Socket
Power Supply:	Transformer	Transformer
Operating Voltage:	230 V AC, 50 Hz	230 V AC, 50 Hz
Power Consumption:	15 W	15 W
Dimensions (W x H x D):	483 x 44 x 160 mm (Excl. Mntg. Bracket)	483 x 44 x 160 mm (Excl. Mntg. Bracket)
Accessories (Included):	Power Cord	Power Cord



GEARBAG 100 S

UNIVERSAL EQUIPMENT BAG 230 X
230 X 310 MM
CGB100S



GEARBAG 100 M

UNIVERSAL EQUIPMENT BAG
330 X 330 X 355 MM
CGB100M



GEARBAG 200 S

UNIVERSAL EQUIPMENT BAG
330 X 330 X 240 MM
CGB200S



GEARBAG 200 M

UNIVERSAL EQUIPMENT BAG
470 X 410 X 270 MM
CGB200M



GEARBAG 300 S

UNIVERSAL EQUIPMENT BAG
460 X 220 X 220 MM
CGB300S



GEARBAG 300 M

UNIVERSAL EQUIPMENT BAG
580 X 250 X 250 MM
CGB300M



GEARBAG 300 L

UNIVERSAL EQUIPMENT BAG
630 X 350 X 350 MM
CGB300L



GEARBAG 400 S

UNIVERSAL EQUIPMENT BAG
1120 X 180 X 115 MM
CGB400S



DMX ADAPTER OUT

ADAPTER CABLE FOR IP65 OUTDOOR PROJECTOR IP65 PLUG
TO XLR FEMALE 3-PIN



SPECIFICATIONS

Product Number:	CLDMXADAPTEROUT
Product Type:	LED PAR Lighting Accessories
Type:	DMX Adapter
Protection Class IP:	65
Length:	1 m
Weight:	0.12 kg



DMX EX

DMX EXTENSION CABLE



SPECIFICATIONS

Product Number:	CLDMXEX001	CLDMXEX003	CLDMXEX005	CLDMXEX010	CLDMXEX020
Product Type:	LED PAR Lighting Accessories	LED PAR Lighting Accessories	LED PAR Lighting Accessories	LED PAR Lighting Accessories	LED PAR Lighting Accessories
Type:	Extension Cable	Extension Cable	Extension Cable	Extension Cable	Extension Cable
Protection Class IP:	65	65	65	65	65
Length:	1 m	3 m	5 m	10 m	20 m
Weight:	0.1 kg	0.12 kg	0.12 kg	0.73 kg	1.3 kg



P EX

POWER EXTENSION CABLE



SPECIFICATIONS

Product Number:	CLPEX001	CLPEX003	CLPEX005	CLPEX010	CLPEX020
Product Type:	LED PAR Lighting Accessories	LED PAR Lighting Accessories	LED PAR Lighting Accessories	LED PAR Lighting Accessories	LED PAR Lighting Accessories
Type:	Extension Cable	Extension Cable	Extension Cable	Extension Cable	Extension Cable
Protection Class IP:	65	65	65	65	65
Length:	1 m	3 m	5 m	10 m	20 m
Weight:	0.14 kg	0.22 kg	0.27 kg	0.86 kg	2 kg



LASER ACCESSORIES

To complement your laser fixtures, the Cameo product line includes dedicated accessories.



EKS 20 M

EMERGENCY STOP SWITCH WITH KEY CONTROL AND 20 M CABLE

- ▶ Remote emergency stop for laser lights
- ▶ Push-to-stop, twist-to-release red palm button
- ▶ Key control prevents unauthorized operation
- ▶ Fixed 20 m double shielded cable
- ▶ Metal interlock connector

SPECIFICATIONS

Product Number:	CLLEKS20M
Product Type:	Laser Accessories
Switching function:	Opener (Contact B red) & Shutter (Contact A Green)
Type:	Emergency Stop Switch
Dimensions (W x H x D):	72 x 65 x 110 mm
Weight:	1.1 kg



ILDA
ILDA EXTENSION CABLE
INCL. SCREW LOCK

SPECIFICATIONS

Product Number:	CLLILDA3M	CLLILDA5M	CLLILDA10M	CLLILDA25M
Product Type:	Laser Accessories	Laser Accessories	Laser Accessories	Laser Accessories
Type:	ILDA Signal Cable	ILDA Signal Cable	ILDA Signal Cable	ILDA Signal Cable
Colour:	Black	Black	Black	Black
Length:	3 m	5 m	10 m	25 m
Weight:	0.24 kg	0.36 kg	0.6 kg	2 kg
Features:	Incl. Screw Lock	Incl. Screw Lock	Incl. Screw Lock	Incl. Screw Lock



Tri-Colour RGB LEDs

Also called 3-in-1, RGB LEDs have red, green and blue emitters to produce the RGB additive Colour Spectrum and white.



LED Technology

LEDs are extremely advantageous for the use in lighting systems: they are bright, emit very little heat, have a very long lifetime and low energy consumption. Also, LED fixtures often weigh less than conventional fixtures.



Eco-Friendly

With highly efficient energy use, a very long LED lifetime and low heat emission, this fixture is environmentally friendly.



DMX512

Created in 1986, DMX512 is a communications standard for lighting equipment. Up to 32 DMX fixtures can be daisy-chained and controlled by a dedicated source, e.g. a lighting console. In a DMX512 daisy chain "network", the controller is called "master" while the daisy-chained fixtures are the "slaves."



"Master" and "Slave"

Simply put, this fixture is able to control or be controlled by other fixtures. In "master" Mode and first in a chain, the fixture acts as a controller for fixtures ("slaves") that are connected to its output. In "slave" Mode, the input of the fixture is connected to the output of a lighting console or "master." Fixtures that are daisy-chained to a slave's output also act as slaves.



Sound Control

In "sound to light" Mode, the fixture is controlled by a built-in microphone capturing sounds to activate colour changes, e.g. the beat of the music.



Standalone Mode

In "standalone" Mode, this fixture uses built-in programmes to control its functions. There is no need for a lighting console or "master" controller.



Strobe Lighting

Strobe lights emit a large number of periodic flashes per second seemingly freezing the movement of objects thus creating the illusion of slow motion.



Single Pixel Control

This device features single pixel control. With individual LED pixel on/off status and colour control this fixture is capable of creating animated patterns and video panel style pixel-mapping effects.



Dust Proof Housing

This laser fixture features a dust proof enclosure. The dust proof housing provides effective sealing against the intrusion of dust and particles. This improves performance and minimizes maintenance.



Quad Colour RGBA/RGBW LEDs

Also called 4-in-1, quad colour LEDs add amber to the RGB spectrum for increased saturation, or white for improved contrast and definition.



Scan Fail System

This laser fixture features a scan fail system. To provide safe audience scanning and prevent eye damage, the scan fail circuit shuts the laser down when a malfunction or scanner failure is detected, e.g. the display of a single dot beam.



Analog Modulation

This laser fixture features analog beam modulation. Analog modulation allows you to continuously and smoothly vary the beam intensity. An RGB laser is capable of generating 16.7 million colors with analog modulation while TTL modulated lasers provide only 7 colours and no color fading.



RGB Additive Colour System

Additive colour mixes use varying amounts of red, green and blue to produce other colours and white. The RGB system is used in television, computer monitors and digital cameras to name a few.



RGB Additive Colour System Plus Amber LEDs

Amber is a pure colour outside the RGB spectrum. Adding amber LEDs to the RGB system produces deeper, warmer, more saturated colours.



RGB Additive Colour System Plus White LEDs

Adding white LEDs to the RGB system produces more contrast and definition and enhances the RGB generated white and pastel colours.



RGBWA

RGB additive colour system plus white and amber LEDs.



COB LED Technology

The "chip-on-board" multi-LED array is a recent technology that produces a high-density large-area light source with high brightness and uniform diffusion for a rich wash of colours.



Ingress Protection Rating of 65

The IP code rates the degree of protection against the intrusion of solid objects, water and access to hazardous parts. This fixture is completely protected against hazardous contact, water jets and ingress of dust.



UV

UV or black lights are employed for decorative and artistic lighting effects.



ILDA

This laser fixture can be controlled with any ILDA-compatible controller.



5-in-1 LED

These fixtures add amber and white to the RGB spectrum for increased saturation, and white for improved contrast and definition.



6-in-1 LED

These fixtures add amber, white and UV to the RGB spectrum for increased saturation, and white for improved contrast and definition. UV or black lights are employed for decorative and artistic lighting effects.



Infrared Remote Control

Featuring an IR sensor, this fixture allows control with a handheld IR remote.



Remote Foot Controller

This fixture allows control with a remote foot controller.



Cable Remote

This fixture allows control with a cable remote controller.



Cold White

"Cold white" is a clean, very bright light in the 5,000 - 10,000 K range with a somewhat artificial touch that goes well with deeply saturated primary colours. Measured in Degrees of Kelvin (K), Colour Temperature indicates the properties of light sources.



Warm White

"Warm White" is in the 2,000 - 4,000 K range providing a soft light with a slight touch of yellow that is natural and pleasing to the eye. Measured in Degrees of Kelvin (K), Colour Temperature indicates the properties of light sources.



RDM-Enabled

This fixture is RDM-enabled. The Remote Device Management protocol extension to DMX allows bi-directional communication over a standard DMX network for the convenient configuration, management and monitoring of RDM devices connected to a dedicated RDM controller.



Unlimited Rotation

This moving head fixture features two high-speed high-torque motors for infinite horizontal and vertical rotation (pan and tilt).



Pan & Tilt

This moving head fixture features two high-speed high-torque motors for horizontal and vertical rotation (pan and tilt) which are controllable independently.



Laser Light

Due to its remarkable directional quality laser light maintains brightness and visibility over long distances. Producing tightly focused, narrow beams that are perfect for impressive lighting effects, Laser Sources are extremely energy-efficient.



Android Compatible

This fixture is delivered with a software allowing control via Android devices.



Mac OS and iOS Compatible

This fixture is delivered with a software allowing control via Mac OS X and iOS.



Windows Compatible

This fixture is delivered with a software allowing control via computers running on Windows.



Zoom Function

This fixture features a motorized or manual zoom to vary its Beam Angle.




Multiple Angles

This fixture provides multiple beam angles and shapes using the included or optional light shaping diffusers.



LAST NIGHT WE SAVED A DJ's LIFE.

LTS 01 B THE ALL-NEW GRAVITY LAPTOP AND CONTROLLER STAND

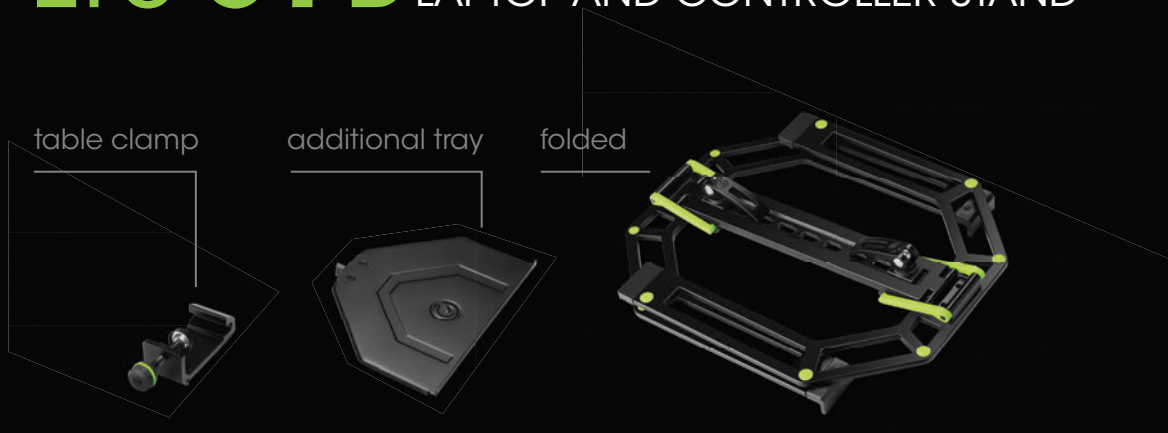

Gravity®
stand your ground.



DESIGNED & ENGINEERED IN GERMANY
gravitystands.com/LTS01B

Article no.	Page
CGB100M	158
CGB100S	158
CGB200M	158
CGB200S	158
CGB300L	158
CGB300M	159
CGB300S	159
CGB400S	159
CLARA	123
CLBARL10RGBA	87
CLBARL10RGBAWH	87
CLBARL10RGBIR	89
CLBARL10RGBIRWH	89
CLCONTROL54	10
CLCONTROL6	11
CLDMXADAPTEROUT	160
CLDMXEX001	161
CLDMXEX003	161
CLDMXEX005	161
CLDMXEX010	161
CLDMXEX020	161
CLDVC4	8
CLEYEEYE	124
CLFB150	105
CLFBUBBLE5L	152
CLFCLEANER250	153
CLFDJ10L	152
CLFDJ5L	152
CLFFAST5L	152
CLFFINE5L	152
CLFHAZE10L	153
CLFHAZE5L	153
CLFHEAVY10L	153
CLFHEAVY5L	153
CLFIH5L	153
CLFLATMOON	113
CLFLATSTORM	112
CLFLOWERHP	116
CLFM250	104
CLFSNOW5L	152
CLFXHEAVY10L	152
CLFXHEAVY5L	152
CLHB100RGBW	18
CLHB300RGBW	19
CLHB300W	19
CLHB4000RGBW	20
CLHB400RGBW	22
CLHB400W	20
CLLEKS20M	164

Article no.	Page
CLLILDA10M	165
CLLILDA25M	165
CLLILDA3M	165
CLLILDA5M	165
CLLIODA1000RGB	92
CLLLUKE1000RGB	94
CLLLUKE700RGB	94
CLLWOOKIE150G	96
CLLWOOKIE200R	96
CLLWOOKIE200RGY	96
CLLWOOKIE400RGB	96
CLLWOOKIE600B	96
CLMB100	14
CLMBZ100	16
CLMFXBAR	136
CLMOVER1	117
CLMP3WW	28
CLMPAR1	144
CLMPAR1SET3	144
CLMPAR2	140
CLMPAR2SET3	140
CLMPAR3	142
CLMPAR3SET3	142
CLMPARCOB1	138
CLMPARCOB1SET2	138
CLMPARFOOTPLUS	146
CLNB300	23
CLNROLL100	128
CLNROLL200	129
CLNS300	26
CLNSCAN100	130
CLOFXS	108
CLP56Q8WBS	40
CLP56Q8WPS	40
CLP56RGB05BS	47
CLP56RGB05PS	47
CLP56RGB10BS	46
CLP56RGB10PS	46
CLP56TRI3WBS	43
CLP56TRI3WPS	43
CLP64Q8WBS	39
CLP64Q8WPS	39
CLP64RGB10BS	45
CLP64RGB10PS	45
CLP64RGB3WBS	41
CLP64RGB3WPS	41
CLP64RGB410BS	44
CLP64RGB410PS	44
CLP64RGBWAU10WBS	38

Article no.	Page
CLP64RGBWAU10WPS	38
CLP64TRI3WBS	42
CLP64TRI3WPS	42
CLPEX001	161
CLPEX003	161
CLPEX005	161
CLPEX010	161
CLPEX020	161
CLPFLAT1REMOTE	54
CLPFLAT1RGB10IR	54
CLPFLAT1RGB10IRSET1	54
CLPFLAT1RGB10IRWH	54
CLPFLAT1RGBWIR	50
CLPFLAT1RGBWIRWH	50
CLPFLAT1TRI3WIR	52
CLPFLAT1TRI3WIRWH	52
CLPFLAT1TWIR	58
CLPFLAT1TWIRWH	58
CLPFLAT1UVIR	56
CLPFLAT1UVIRWH	56
CLPST64Q8W	70
CLPST64RGBAQ8W	71
CLPST64RGBWAU12W	68
CLPST64RGBWAU12WWH	68
CLPST64TRI3W	72
CLPSTBARND00R1B	77
CLPSTBARND00R1WH	77
CLPSTBARND00R2B	77
CLPSTBARND00R2WH	77
CLPSTMINICOB30W	74
CLPSTMINICOB30WWH	74
CLPSTMINIQ4WW	75
CLPSTMINIQ4WWWH	75
CLPSTMINIQ8W	73
CLPSTMINIQ8WWH	73
CLPSTMINITRI3W	76
CLPSTMINITRI3WWH	76
CLPSTTRI12IP	80
CLQR40	131
CLQS15RGBW	62
CLQS15RGBWWH	62
CLQS15W	64
CLQS15WWH	64
CLQS40RGBW	66
CLQS40RGBWWH	66
CLSB6D	156
CLSB83	156
CLSCAN80W	133
CLSERUM	121

Article no.	Page
CLSTORM	111
CLSTORMFX	114
CLSUPERFLYFX	120
CLSUPERFLYHP	118
CLSUPERFLYXS	119
CLSW2000	150
CLTRIBAR200IR	84
CLTRIBAR200IRWH	84
CLTRIBAR400IR	85
CLTS40WW	32
CLTS40WWWH	32
CLTS60WRGBW	34
CLTS60WRGBWWH	34
CLTW100RGB	103
CLTW100W	102
CLTW600RGB	101
CLTW600W	100
CLTWINSCAN20	132
CLUVBAR200IR	86
CLUVO	110
CLV00DOO	122
CLWAYFARER	125



PRODUCT CATALOGUE

MI/DJ

YOUR CAMEO® DEALER:



cameolight.com



facebook.com/cameolightandsound
youtube.com/cameolightandsound
blog.adamhall.com

EDITION **2018**



The information contained in this publication, including numerical data, has been prepared as a general guide to the products, but intending buyers and users must satisfy themselves as to the suitability and the safety of the products for their particular purposes and duties. No responsibility is assumed for any errors herein. The company reserves the right to alter the designs and material specifications of products shown in this publication without notice.

Cameo®
is a brand of **adam hall** experience
event technology

SOUND
TECHNOLOGY

LIGHT
TECHNOLOGY

STAGE
EQUIPMENT

HARDWARE
FOR FLIGHTCASES

share the experience at
adamhall.com



PRODUCT **CATALOGUE** PRO







Cameo® is a brand of the Adam Hall Group.



SOUND
TECHNOLOGY

LIGHT
TECHNOLOGY

STAGE
EQUIPMENT

HARDWARE
FOR FLIGHTCASES

ADAM HALL GROUP BRANDS



DISTRIBUTION BRANDS





Here at **Cameo®**, our mission is to make smart, innovative and high-quality lighting technology accessible to a wide audience.

Because all of our products are developed in Germany at our headquarters near Frankfurt am Main, we are able to respond quickly and spontaneously to the wishes and suggestions of our customers.

In this way, we can be confident that all of the passion invested into our products will ensure that they consistently meet the current and future requirements of our customers.

Functionality and design go hand-in-hand during development, and this enables us to be one hundred percent behind each of our products.

Your **Cameo®** Team

cameolight.com

Cameo® is a brand of the Adam Hall Group.



facebook.com/cameo.lighting
youtube.com/cameolightandsound
blog.adamhall.com

TABLE OF **CONTENTS**

CONTROLLERS	8
LED MOVING HEADS	12
LED OUTDOOR FIXTURES	34
LED FLAT PAR CANS	56
LED BARS	72
EFFECT MACHINES	82
ICON LEGENDS	98
REGISTER	100



 **cameo**[®]
colours of light
iDMX[®] CORE



CONTROLLERS

Wireless lighting control at your fingertips using iOS and Android devices with the iDMX CORE WiFi and W-DMX™ Box.

NEW

Featuring



WIRELESS SOLUTION
MADE IN SWEDEN



iDMX[®] CORE

WIFI TO W-DMX[™] CONVERTER



FEATURES





- ▶ Battery-powered WiFi To W-DMX[™] converter
- ▶ Designed for operation with the Cameo iDMX[®] controller app
- ▶ WiFi receiver for iOS and Android devices
- ▶ 2.4 GHz W-DMX[™] transmitter with up to 300 m operating range
- ▶ DMX inputs for use with hardware controllers
- ▶ DMX outputs for controlling standard DMX lights with Cameo's iDMX[®] controller app
- ▶ Long-life LG Chem Lithium-Ion Battery for reliable operation
- ▶ Battery management system prevents overcharging and exhaustive discharge
- ▶ Power adapter charger, bag and DMX Y-cables for 3-pin and 5-pin included

SPECIFICATIONS

Product Number:	CLIDMXCORE
Product Type:	WiFi to W-DMX [™] Connector Box
Range Of W-DMX [™] :	Up To 300 m
Range Of WiFi:	Up To 15 m
Radio Frequency:	2,4 GHz
DMX Input / Output:	3-Pin / 5-Pin
Controls:	On/Off, Reset
Indicators:	Control LEDs
Battery Capacity:	24 Wh
Charging Time:	4 Hours / 100%

Battery Operation Time At Maximum Load:	Up to 9 Hours
Housing Material:	Aluminium
Cabinet Colour:	Black
Protection Class IP:	20
Cooling:	Convection
Max. Ambient Temperature:	-15°C – 45°C
Dimensions (W x H x D):	85 x 25 x 170.5 mm (including antennas)
Weight:	0.8 kg

NEW

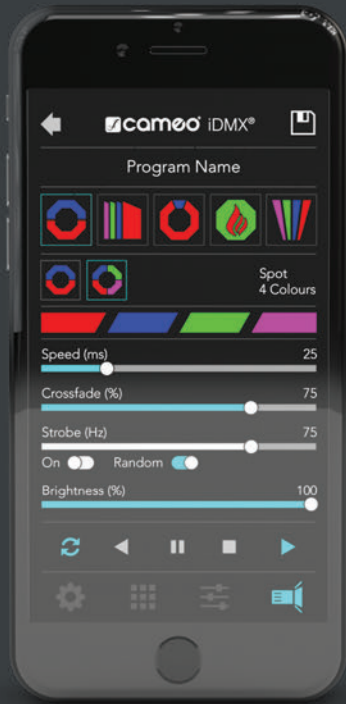

iDMX[®] APP

iDMX[®] CONTROLLER APP



FEATURES

- ▶ Free App for iOS and Android
- ▶ Easy control of up to 512 DMX channels
- ▶ Customised user interface for all RGB, RGBW, RGBA, RGBWA, RGB UV, RGBWA UV fixtures
- ▶ Group lights freely to control separate zones
- ▶ Effect generator for creative light shows and varied colour schemes
- ▶ Operate up to eight effects in parallel
- ▶ Share program setups and effects
- ▶ Create and edit your own light shows
- ▶ Timer function
- ▶ WiFi password protection

The Apple® Logo is a trademark of Apple Inc. Android™ is a trademark of Google Inc.






AURO[®] SERIES

YOUR IMAGINATION NEEDS NO LIMITS.

Chock-full of amazing features, the **Cameo Auro[®] Series** is engineered for stunning professional lighting design. **Auro[®]** hallmarks include **RDM capability**, **16-bit resolution** and high-precision, high-speed **3-phase motors**. With **ultra-bright long-life LEDs** radiating rich, intense colours, **automatic positioning correction** and **battery-powered displays** for offline setting, **Auro[®]** fixtures are primed for the big time!

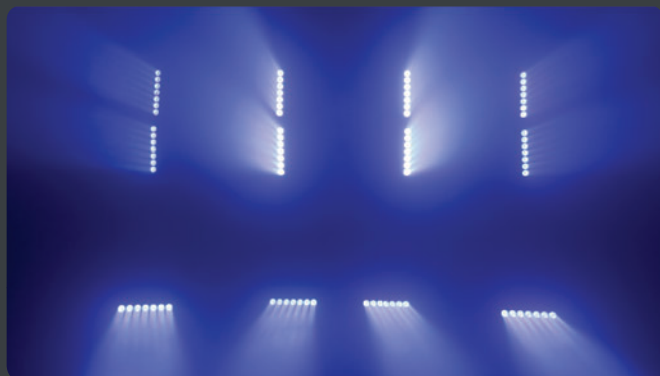

AURO® BAR 100

7 x 15 W RGBW LED MOVING BAR



Designed for exciting, highly creative lighting, the Cameo AURO® BAR 100 produces subtle to rich, saturated RGBW colour mixes and three temperatures of white with a line of seven 15 watt quad LEDs. The all-professional moving light's features include two high speed 3-phase motors for infinite pan and tilt, 16-bit resolution for ultra smooth motion and dimming, and with a 3,600 Hz refresh rate it is ideal for TV and video applications. In addition, the AURO® BAR 100 sports colour temperature and automatic positioning correction, a strobe function and Single pixel control for amazing chase effects. It is RDM enabled and provides four modes of DMX control. The fixture is Art-Net compatible with automatic FDT bridging to maintain daisy chain operation in case of single device failure. A battery-powered 6-button display enables easy offline configuration. Built for reliable heavy-duty use, the AURO® BAR 100 comes in a rugged compound enclosure with both 3-Pin and 5-Pin DMX, RJ45 and Neutrik powerCON mains inputs and outputs. The versatile fixture operates on all voltages from 100 - 240 V AC.

FEATURES

- ▶ LED moving bar with infinite pan and tilt
- ▶ Two high-speed 3-phase motors
- ▶ 16-bit resolution and 3,600 Hz refresh rate
- ▶ 7 powerful 15 watt quad LEDs
- ▶ Rich RGBW colours, subtle pastel shades, 3 natural whites
- ▶ 4 DMX modes, RDM capability and ArtNET compatible
- ▶ Ethernet switch with FDT bridging (failsafe data transfer)
- ▶ Automatic positioning and colour temperature correction
- ▶ Single pixel control
- ▶ 20 Hz strobe and 4 dimming curves
- ▶ 3- and 5-Pin DMX, Neutrik powerCON and RJ45 connectors
- ▶ Battery-powered 6-button display for offline setting



PHOTOMETRICAL DATA

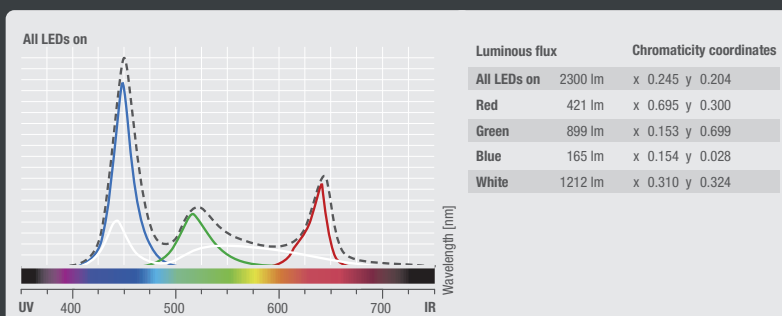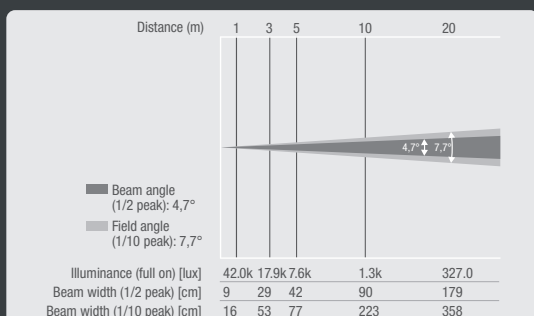

SPECIFICATIONS

Product Number:	CLABAR100
Product Type:	LED Moving Light
Colour Range:	RGBW
Number Of LEDs:	7
LED Type:	15 W
Refresh Rate:	3,600 Hz
Dispersion:	4,7°, 7,7°
DMX Input / Output:	RJ45 Ethernet In / Out (ArtNET), XLR 3-Pin Male, XLR 3-Pin Female, XLR 5-Pin Male, XLR 5-Pin Female
DMX Mode:	9, 19, 29, 39-Channel
DMX Functions:	Auto Programs, Colour Macro, Colour Temperature Correction, Dimmer, Dimmer Curve, Pan/Tilt, Pan/Tilt Fine, Patterns, RGBW, Strobe
Pan Movement:	Unlimited
Tilt Movement:	Unlimited

High Speed Strobe:	0 - 20Hz
Standalone Modes:	Auto Run
Controls:	-, +, Battery Display, Enter, Mode, Value Up / Down
Indicators:	Colour LC Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	140 W
Power Connector:	Neutrik powerCON IN/OUT
Housing Material:	ABS Plastic, Metal
Housing Colour:	Black
Cooling:	Convection
Illuminance:	42,000 lx @ 1 m
Luminous Flux:	2,300 lm
Dimensions (W x H x D):	570 x 260 x 195 mm
Weight:	9.5 kg



Unlimited
pan & tilt
rotation


AURO® BEAM 150

7 x 15 W RGBW LED BEAM MOVING HEAD



The Cameo AURO® BEAM 150 is an ultra-fast moving head with unlimited pan and tilt movement, 16-bit resolution and a 3,600 Hz refresh rate. Seven 15 Watt Quad LEDs produce rich RGBW colours, fresh pastel colours and vibrant shades of white with a 12° beam angle and a light intensity of 50,000 lux; Single pixel control ensures impressive pixel mapping effects. The professional features of the AURO® BEAM 150 include a low-noise temperature controlled fan, powerCON mains connectors by Neutrik and 3 and 5-Pin inputs and outputs for the DMX signal. It can be operated fully automatically with programmable scenes or music, or used in standalone, master or slave mode; when using DMX, 5-Channel, 11-Channel, 19-Channel and 41-Channel control modes are available, with options that include dimmer and strobe functions. The rugged black metal and ABS housing of the Cameo AURO® BEAM 150 has 6 buttons and a backlit display for easy operation. The moving head can be used with all mains voltages from 100 to 240 volts and comes with a power cable and an omega mounting bracket.

FEATURES

- ▶ 7 x high power 15 W RGBW LEDs
- ▶ RGBW spectrum for saturated primary colours, subtle pastel shades and natural shades of white
- ▶ Single pixel control for effective pixel mapping effects
- ▶ 2 high-speed engines for precise, high-speed and unlimited Pan and Tilt Movements
- ▶ Effective automated operating modes
- ▶ Programmable standalone scenes
- ▶ Professional 3- and 5-Pin DMX sockets and Neutrik powerCON mains connector
- ▶ With a 3,600 Hz refresh rate, it is ideal for TV and video applications



PHOTOMETRICAL DATA

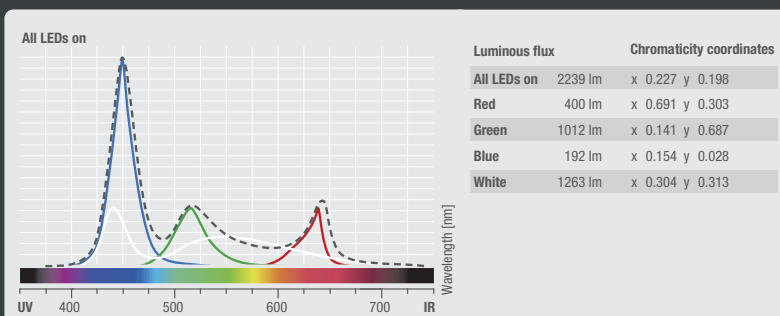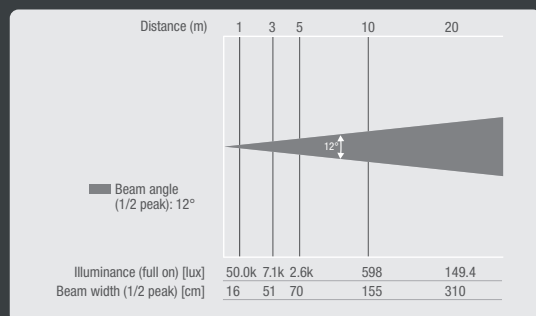

SPECIFICATIONS

Product Number:	CLABEAM150
Product Type:	LED Moving Lights
Colour Range:	RGBW
Number Of LEDs:	7
LED Type:	15 W
Refresh Rate:	3,600 Hz
Dispersion:	12°
DMX Input / Output:	XLR 3-Pin Male / Female, XLR 5-Pin Male / Female
DMX Mode:	5, 11, 19, 41-Channel
DMX Functions:	Dimmer, Pan/Tilt, Pan/Tilt Fine, Single pixel control, Strobe
Pan Movement:	Unlimited
Tilt Movement:	Unlimited
High Speed Strobe:	> 30 Hz

Standalone Modes:	Auto Run, Sound Control
Controls:	-, +, Enter, Mode, Value Down, Value Up
Indicators:	Colour LC Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	130 W
Power Connector:	Neutrik powerCON IN / OUT
Housing Material:	ABS Plastic, Metal
Housing Colour:	Black
Cooling:	Silent, Temperature Controlled Fan
Illuminance:	50,000 lx @ 1 m
Luminous Flux:	2,300 lm
Dimensions (W x H x D):	375 x 260 x 180 mm
Weight:	4.8 kg



AURO® MATRIX 500

5 x 5 x 15 W RGBW LED MOVING MATRIX



Thoroughly professional and feature-packed, the Cameo Auro® Matrix 500 produces rich RGBW colour mixing and three temperatures of white with its 5 x 5 arrangement of 25 powerful 15 watt quad LEDs. Two high speed 3-phase motors enable infinite pan and tilt, 16-bit resolution provides ultra smooth rotation and dimming, and the fixture's 3,600 Hz refresh rate makes it a perfect choice for TV and video applications. Engineered for awesome, highly creative lighting, the Auro® Matrix 500 includes Single pixel control for exciting chase effects, a 20 Hz strobe plus colour temperature and automatic positioning correction. It is RDM enabled and provides four modes of DMX control. The fixture is Art-Net compatible with automatic FDT bridging to maintain daisy chain operation in case of single device failure. A battery-powered 6-button display enables easy offline configuration. The Auro® Matrix 500's rugged compound enclosure is built for superior durability and sports a super quiet, temperature controlled fan, 3-Pin and 5-Pin DMX, RJ45 Ethernet and Neutrik powerCON mains connectors. The moving light operates on all voltages from 100 - 240 V AC.

FEATURES

- ▶ LED moving matrix with infinite pan and tilt
- ▶ Two high-speed 3-phase motors
- ▶ 16-bit resolution and 3,600 Hz Refresh Rate
- ▶ 5 x 5 powerful 15 watt quad LED array
- ▶ Rich RGBW colours, subtle pastel shades, 3 natural whites
- ▶ 4 DMX modes, RDM capability and ArtNET compatible
- ▶ Ethernet switch with FDT bridging (failsafe data transfer)
- ▶ Automatic positioning and colour temperature correction
- ▶ Single pixel control
- ▶ 20 Hz strobe and 4 dimming curves




PHOTOMETRICAL DATA

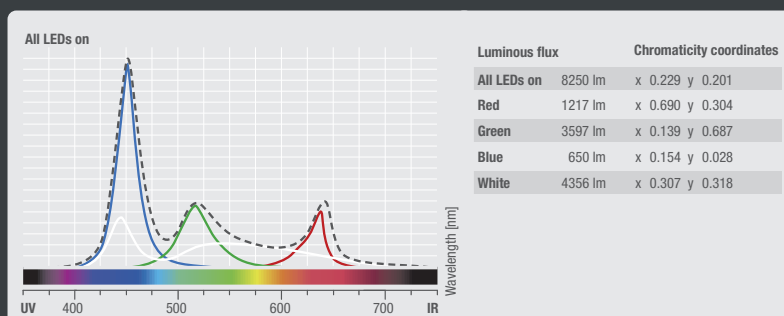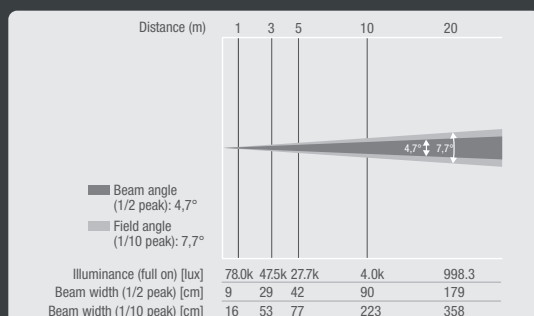

SPECIFICATIONS

Product Number:	CLAM500
Product Type:	LED Moving Lights
Colour Range:	RGBW
Number Of LEDs:	25
LED Type:	15 W
Refresh Rate:	3,600 Hz
Dispersion:	4.7°, 7.7°
DMX Input / Output:	RJ45 Ethernet In / Out (ArtNET), XLR 3-Pin Male / Female, XLR 5-Pin Male / Female
DMX Mode:	8, 33, 37, 111-Channel
DMX Functions:	Auto Programs, Colour Macro, Colour Temperature Correction, Dimmer, Dimmer Curve, Pan/Tilt, Pan/Tilt Fine, Patterns, RGBW, Strobe
Pan Movement:	Unlimited
Tilt Movement:	Unlimited

High Speed Strobe:	0 - 20 Hz
Standalone Modes:	Auto Run
Controls:	-, +, Battery Display, Enter, Mode, Value Down, Value Up
Indicators:	Colour LC Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	490 W
Power Connector:	Neutrik powerCON IN / OUT
Housing Material:	ABS Plastic, Metal
Housing Colour:	Black
Cooling:	Convection
Illuminance:	78,000 lx @ 1 m
Luminous Flux:	8,250 lm
Dimensions (W x H x D):	480 x 585 x 261 mm
Weight:	19 kg

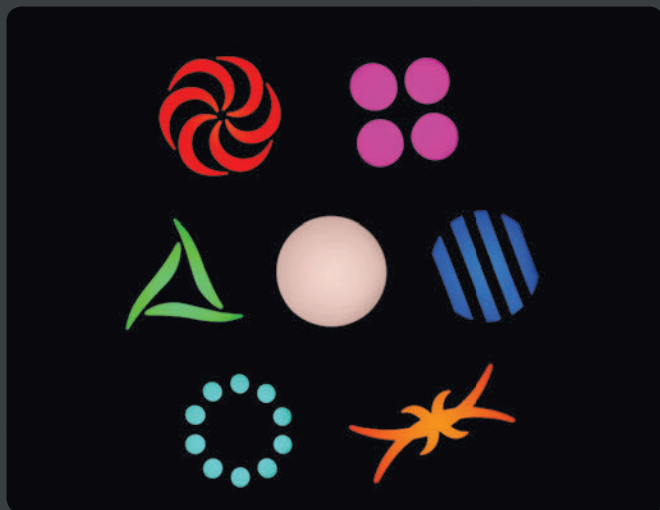


AURO® SPOT 100

60 W SPOT LED MOVING HEAD



The Cameo AURO® SPOT 100 is an RDM enabled ultra bright moving head with 16-bit resolution, 630° pan and 235° tilt movement and high speed 3-phase motors. It is powered by a single 60 watt LED and sports 8 intense colours plus white and split colours, 6 replaceable gobos and a rotating 3-facet prism for awesome effects. The AURO® SPOT 100 features 5-Channel, 13-Channel, 22-Channel DMX control modes, auto run programs and sound activation as well as master, slave and standalone capabilities. Functions include a choice of 4 smooth dimming curves, shake effects and a 0 - 20 Hz cycle strobe. The heavy-duty housing integrates a temperature controlled low noise fan, 3-Pin and 5-Pin DMX inputs and outputs, Neutrik powerCON mains connectors and a 4-button LCD control display. The multi-voltage AURO® SPOT 100 operates on 100 - 240 V AC.

FEATURES

- ▶ RDM enabled moving head
- ▶ 90,000 lx @ 1 m
- ▶ High speed 3-phase motors
- ▶ 16-bit resolution
- ▶ Motor focus
- ▶ Automated positioning correction
- ▶ Battery-powered display for offline operation
- ▶ 8 intense colours, white and split colours
- ▶ 6 gobos + open
- ▶ All gobos replaceable with metal or glass gobos
- ▶ Rotating 3-facet prism
- ▶ Smooth dimming from 100 - 0% with 4 selectable curves
- ▶ 0 - 20 Hz strobe
- ▶ Temperature controlled low noise fan



PHOTOMETRICAL DATA

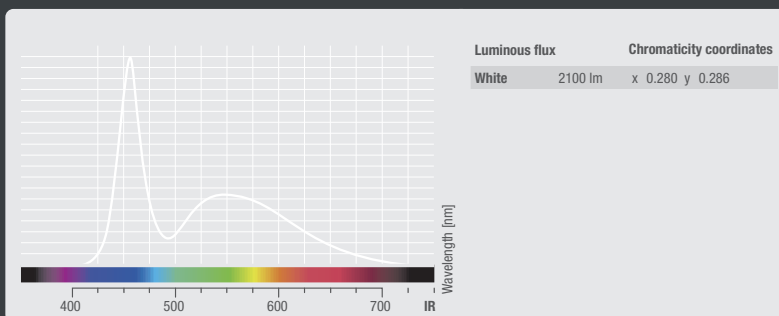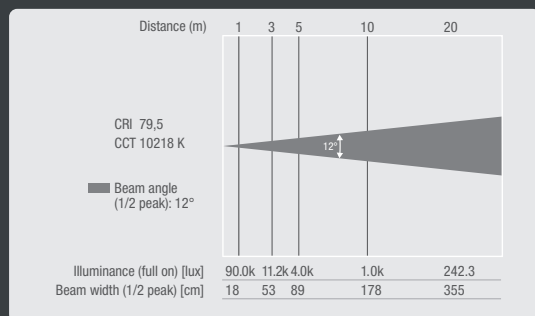

SPECIFICATIONS

Product Number:	CLAS100
Product Type:	LED Moving Lights
Colour Spectrum:	8-Channel Multi Colour, Split Colours, White
Number Of LEDs:	1
LED Type:	60 W
Colour Temperature:	10,000 K
Dispersion:	(manually adjustable) 12° - 16°
Number Of Gobos:	6 + open
Gobo Size:	Outer Diameter: 22.90 mm, Image Diameter: 19.50 mm
DMX Input / Output:	XLR 3-Pin Male / Female, XLR 5-Pin Male / Female
DMX Mode:	5, 13, 22-Channel
DMX Functions:	Auto Programs, Dimmer, Dimmer Curve, Gobo Shake, Gobo Wheel, PAN, TILT
Pan Movement:	630°

Tilt Movement:	235°
High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto Run, Sound Control
Controls:	-, +, Enter, Mode, Value Down, Value Up
Indicators:	Colour LC Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	175 W
Power Connector:	Neutrik powerCON IN / OUT
Housing Material:	ABS Plastic, Metal
Housing Colour:	Black
Cooling:	Silent, Temperature Controlled Fan
Illuminance:	90,000 lx @ 1 m
Luminous Flux:	2,100 lm
Dimensions (W x H x D):	285 x 480 x 180 mm
Weight:	8.8 kg



AURO® SPOT 200

100 W SPOT LED MOVING HEAD



The Cameo AURO® SPOT 200 is an RDM enabled ultra bright moving head with 16-bit resolution, 630° pan and 235° tilt movement and high speed 3-phase motors. It is powered by a single 100 watt LED and sports 8 intense colours plus white and split colours, 6 replaceable gobos and a rotating 3-facet prism for awesome effects. The AURO® SPOT 200 features 5-channel, 13-channel, 22-channel DMX control modes, auto run programs and sound activation as well as master, slave and standalone capabilities. Functions include a choice of 4 smooth dimming curves, shake effects and a 0 - 20 Hz cycle strobe. The heavy-duty housing integrates a temperature controlled low noise fan, 3-pin and 5-pin DMX inputs and outputs, Neutrik powerCON mains connectors and a 4-button LCD control display. The multi-voltage AURO® SPOT 200 operates on 100 - 240 V AC.

FEATURES

- ▶ RDM enabled moving head
- ▶ 130,000 lx @ 1 m
- ▶ High speed 3-phase motors
- ▶ 16-bit resolution
- ▶ Motor focus
- ▶ Automated positioning correction
- ▶ Battery-powered display for offline operation
- ▶ 8 intense colours, white and split colours
- ▶ 6 gobos + open
- ▶ All gobos replaceable with metal or glass gobos
- ▶ Rotating 3-facet prism
- ▶ Smooth dimming from 100 - 0% with 4 selectable curves
- ▶ 0 - 20 Hz strobe
- ▶ Temperature controlled low noise fan



PHOTOMETRICAL DATA

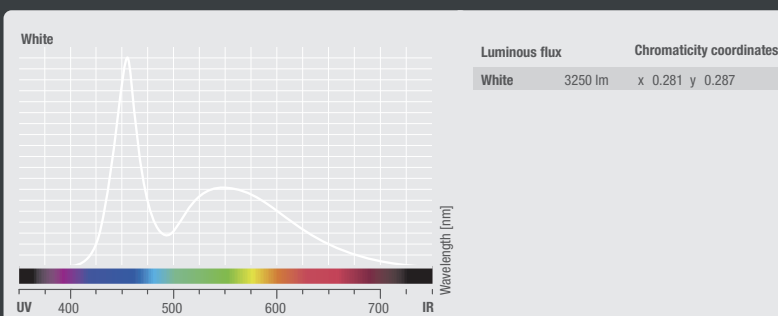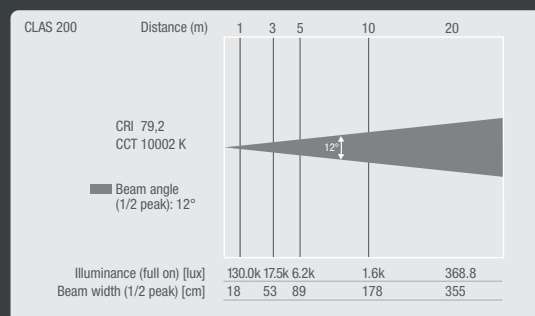

SPECIFICATIONS

Product Number:	CLAS200
Product Type:	LED Moving Lights
Colour Spectrum:	8-Channel Multi Colour, Split Colours, White
Number Of LEDs:	1
LED Type:	100 W
Colour Temperature:	10,000 K
Dispersion:	(manually adjustable) 12° - 16°
Number Of Gobos:	6 + open
Gobo Size:	Outer Diameter: 22.90 mm, Image Diameter: 19.50 mm
DMX Input / Output:	XLR 3-Pin Male / Female, XLR 5-Pin Male / Female
DMX Mode:	5, 13, 22-Channel
DMX Functions:	Auto Programs, Dimmer, Dimmer Curve, Gobo Shake, Gobo Wheel, PAN, TILT
Pan Movement:	630°
Tilt Movement:	235°

High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto Run, Sound Control
Controls:	-, +, Enter, Mode, Value Down, Value Up
Indicators:	Colour LC Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	220 W
Power Connector:	Neutrik powerCON IN / OUT
Housing Material:	ABS Plastic, Metal
Housing Colour:	Black
Cooling:	Silent, Temperature Controlled Fan
Illuminance:	130000lx @ 1 m
Luminous Flux:	3,250 lm
Dimensions (W x H x D):	285 x 480 x 180 mm
Weight:	8.8 kg



AURO® SPOT 300


180 W SPOT LED MOVING HEAD

NEW



The Cameo AURO® SPOT 300 is an RDM-capable ultra bright moving head with 16-bit resolution, 630° pan and 235° tilt movement and high speed 3-phase motors. It is powered by a single 180 watt LED and sports 8 intense colours plus white and split colours. A rotating 3-facet prism, 8 fixed and 6 replaceable rotating gobos provide a wide variety of awesome animated effects. The AURO® SPOT 300 features 5-Channel, 15-Channel, 24-Channel DMX control modes, automated programs and sound activation as well as master, slave and standalone capabilities. Functions include a choice of 4 smooth dimming curves, gobo shake and a high-speed 0 - 20 Hz cycle strobe. The heavy-duty housing integrates a temperature controlled low noise fan, 3-Pin and 5-Pin DMX plus Neutrik powerCON inputs and outputs. A battery-powered 6-button display enables convenient offline configuration. The all-professional multi-voltage AURO® SPOT 300 operates on 100 - 240 V AC.

FEATURES

- ▶ RDM enabled moving head
- ▶ Luminous flux 4900 lm
- ▶ High speed 3-phase motors
- ▶ 16-bit resolution
- ▶ Motor focus
- ▶ Automated positioning correction
- ▶ Battery-powered display for offline configuration
- ▶ 8 intense colours, white and split colours
- ▶ 2 gobo wheels + open
- ▶ 6 rotating and 8 fixed gobos
- ▶ Rotating gobos replaceable with metal or glas gobos
- ▶ Rotating 3-facet prism
- ▶ Smooth dimming from 100 - 0% with 4 selectable curves



PHOTOMETRICAL DATA

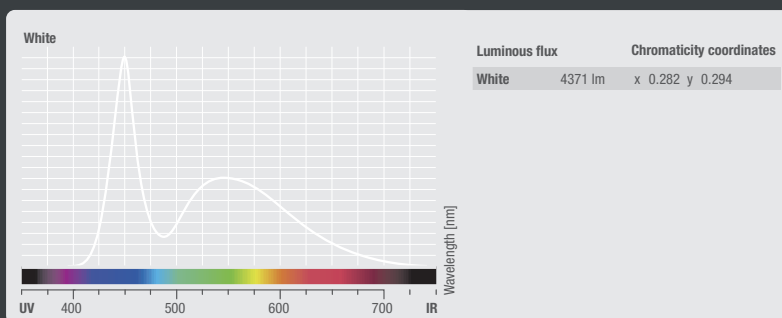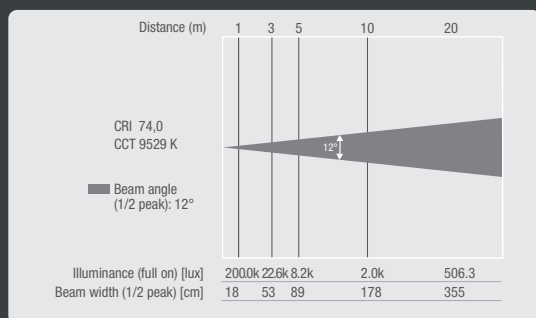

SPECIFICATIONS

Product Number:	CLAS300
Product Type:	LED Moving Lights
Type:	LED Moving Heads
Colour Spectrum:	8-Channel Multi Colour, Split Colours, White
Number Of LEDs:	1
LED Type:	180 W
Colour Temperature:	9,300 K
Dispersion:	12 - 16°
Number Of Gobos:	14
Gobo Size:	22.90 mm
DMX Input / Output:	XLR 3-Pin Male / Female, XLR 5-Pin Male / Female
DMX Mode:	5, 15, 24-Channel
DMX Functions:	Auto Programs, Dimmer, Dimmer Curve, Gobo Shake, Gobo Wheel, PAN, TILT
Pan Movement:	630°

Tilt Movement:	235°
High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto Run, Sound Control
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	Colour LC Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	320 W
Power Connector:	Neutrik powerCON IN / OUT
Housing Material:	Plastic, Metal
Housing Colour:	Black
Cooling:	Temperature Controlled Fan
Illuminance:	200,000 lx @ 1 m
Luminous Flux:	4900 lm
Dimensions (W x H x D):	285 x 480 x 180 mm
Weight:	8.6 kg



AURO® SPOT 400

180 W SPOT LED MOVING HEAD



Featuring 16-bit resolution and high speed 3-phase motors for 630° pan and 230° tilt, the Cameo AURO® SPOT 400 is a professional moving head with RDM capability and powerful, ultra bright single LED. The fixture sports 2 gobo wheels, rotating and fixed gobos, 2 colour wheels and a choice of 3 rotating prisms enabling spectacular lighting and stunning effects with 12 intense colours, split colours and two temperatures of white. The AURO® SPOT 400 provides 5-Channel, 19-Channel and 27-Channel DMX control and auto programs, so that operation as master, slave and standalone is possible. Functions include motorized focus, frost filter, a choice of 4 smooth dimming curves, shake effects and a fast 0 - 20 Hz cycle strobe. The heavy-duty compound enclosure integrates a battery-powered 6-button display that allows convenient offline configuration, 3-Pin and 5-Pin DMX inputs and outputs, Neutrik powerCON connectors and a temperature-controlled low-noise fan. The multi-voltage AURO® SPOT 400 runs on 100 - 240 V AC.

FEATURES

- ▶ RDM-capable moving head with high-power single LED
- ▶ 200,000 lx @ 1 m, 4,470 lm
- ▶ High-speed 3-phase motors
- ▶ Motor focus, pan and tilt with 16-bit resolution
- ▶ Automatic positioning correction
- ▶ 2 Colour Wheels, 12 colours, Split Colours, warm and cold white plus open
- ▶ 2 gobo wheels, 7 rotating, 9 fixed gobos plus open
- ▶ Frost filter
- ▶ Rotating 3, 5 and 8-facet prisms
- ▶ 0 - 20 Hz strobe
- ▶ Smooth 100 - 0% dimming with 4 selectable curves
- ▶ Temperature controlled low-noise fan



PHOTOMETRICAL DATA

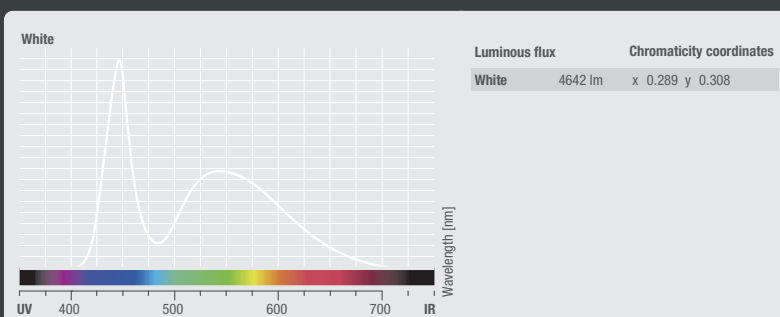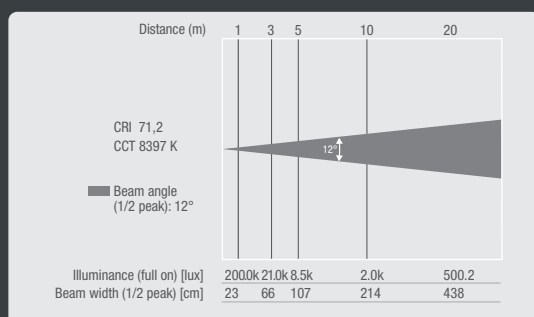


SPECIFICATIONS

Product Number:	CLAS400	Pan Movement:	540° / 630°
Product Type:	LED Moving Lights	Tilt Movement:	230°
Colour Spectrum:	12-Channel Multi Colour, Split Colours, Warm White, Cold White	Standalone Modes:	Auto Run, Master/Slave Mode, Static Mode
Number Of LEDs:	1	Controls:	-, +, Battery Display Enter, Mode, Value Up / Down
LED Type:	180 W	Indicators:	Colour LC Display
Colour Temperature:	9,300 K	Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Dispersion:	12°	Power Consumption:	290 W
Number Of Gobos:	16	Power Connector:	Neutrik powerCON IN / OUT
Gobo Size:	Exterior Diameter: 22.9 mm - Motif: 19.5 mm	Housing Material / Colour:	ABS, Metal / Black
DMX Input / Output:	XLR 3-Pin Male / Female, XLR 5-Pin Male / Female	Cooling:	Temperature Controlled Fan
DMX Mode:	5, 19, 27-Channel	Illuminance:	200,000 lx @ 1 m
DMX Functions:	3 x Prism, Auto Programs, Colour Wheel, Dimmer, Dimmer Curves, Gobo - Rotation/ Shake/ Wheel, Focus, Frost, Motion Macro, Pan/Tilt, Pan/Tilt Fine, Strobe	Luminous Flux:	4470 lm
		Dimensions (W x H x D):	405 x 565 x 285 mm
		Weight:	16 kg

AVAILABLE ACCESSORIES



- ▶ Cameo AS 4 INSERT - Foam insert for Auro Spot 400 (see page 82 Accessories)

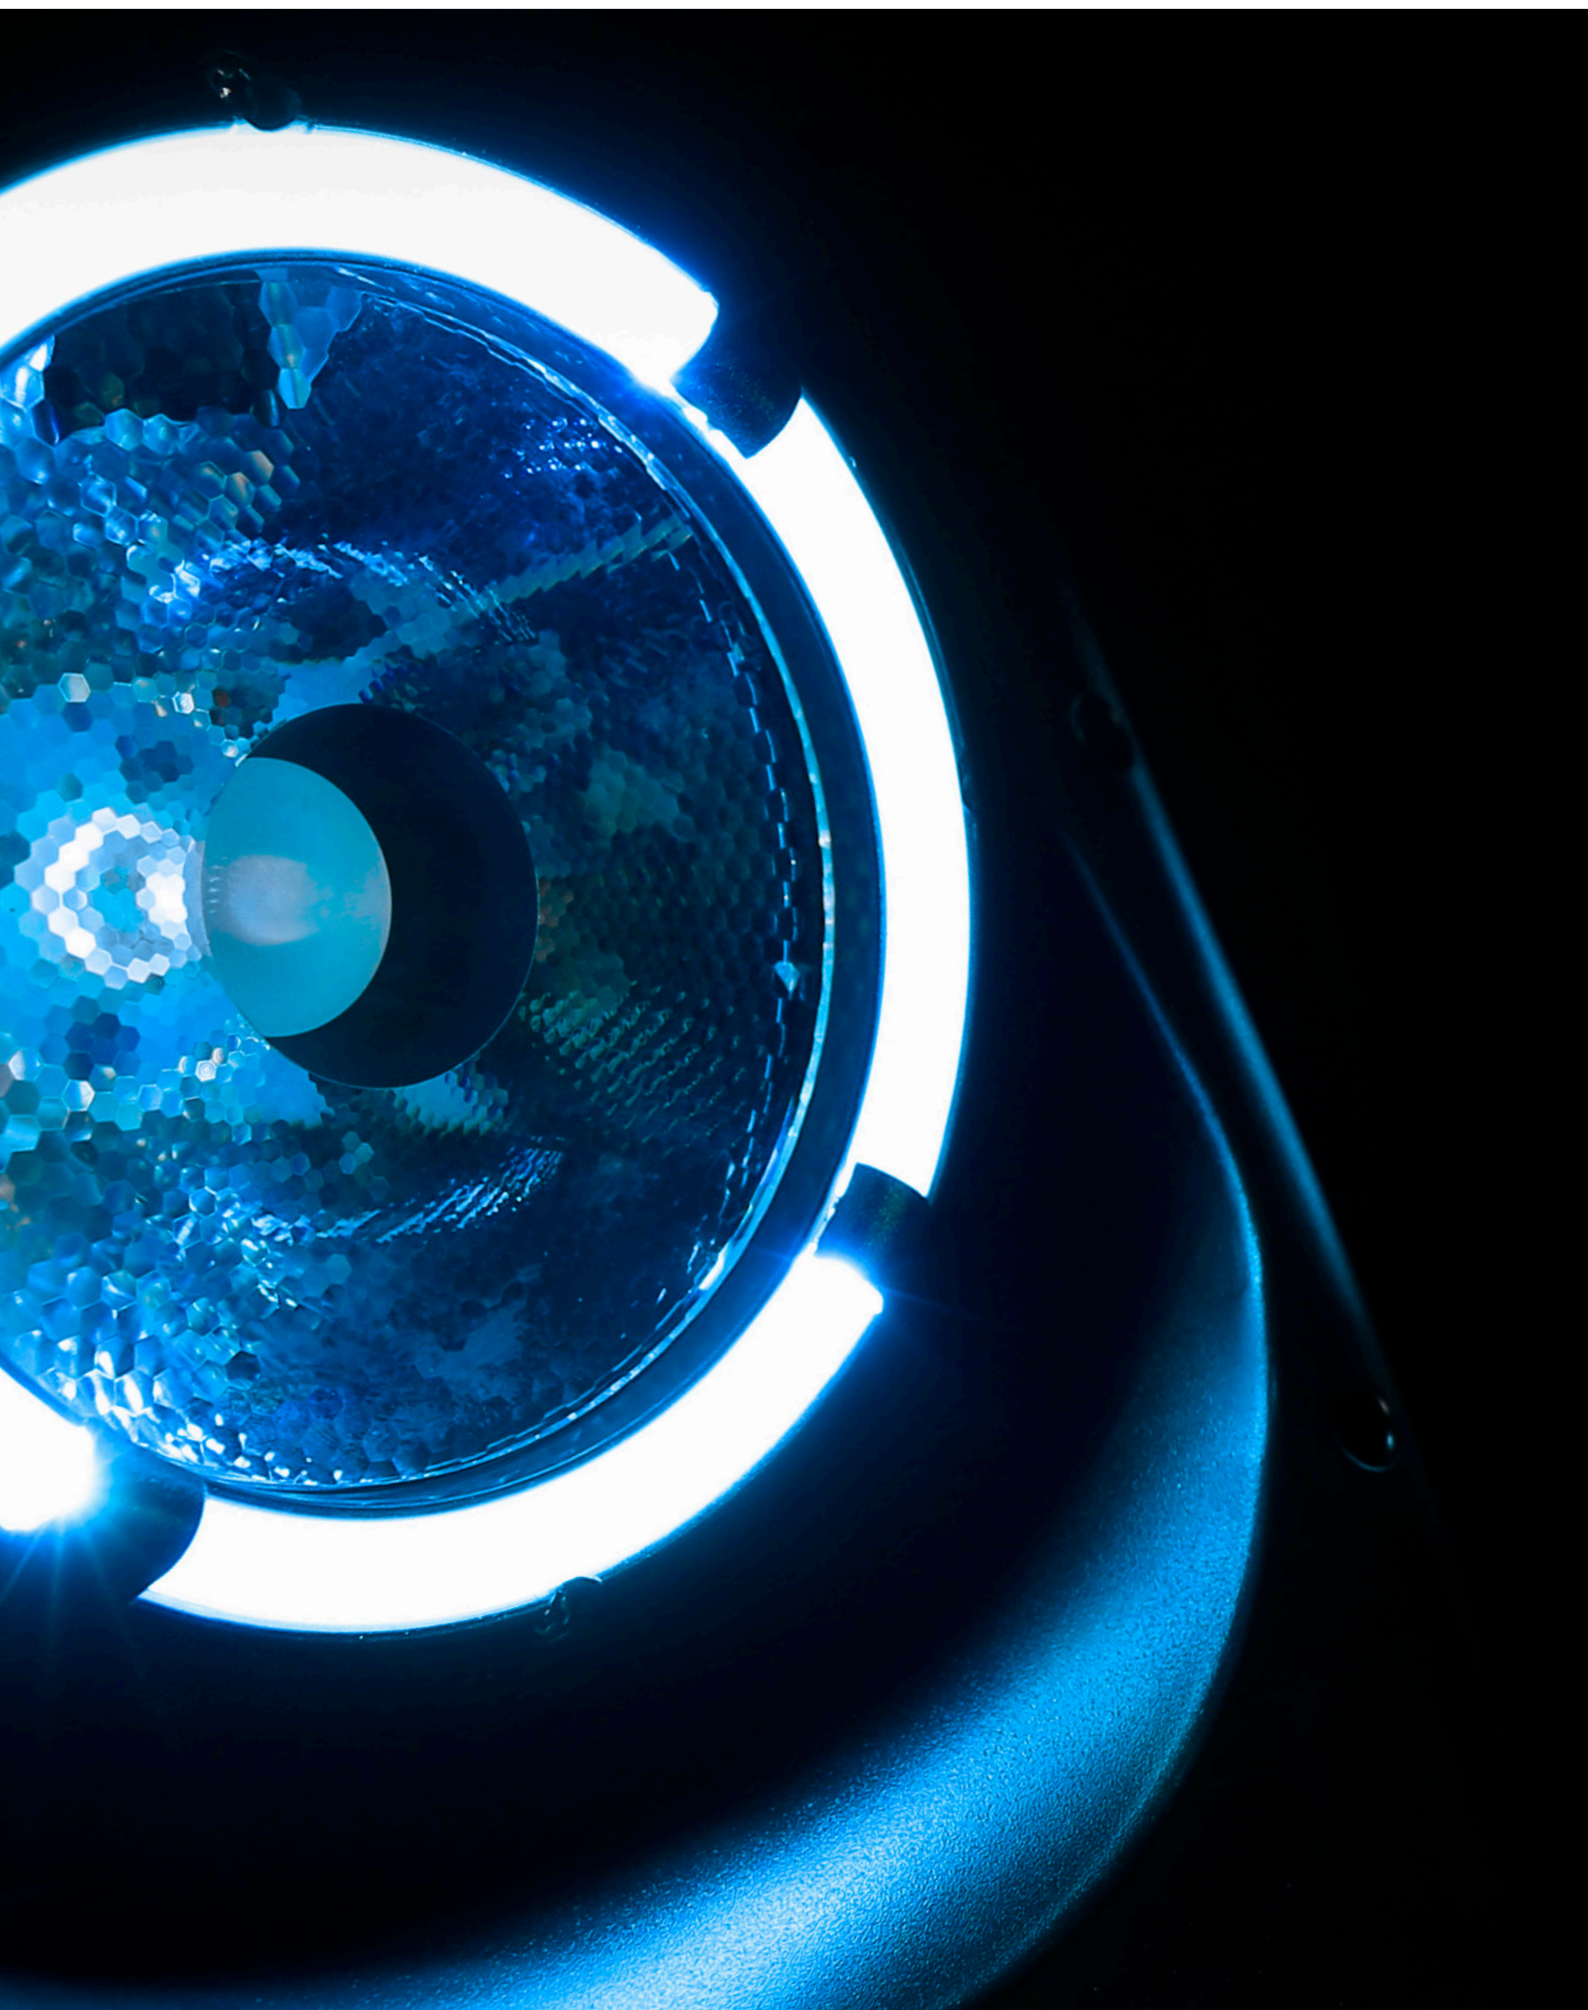

MOVO® SERIES

The core of every MOVO® series moving head is its high output 60W OSRAM LED. With an RGBW colour spectrum they can produce saturated primary colours, subtle pastel hues and natural shades of white. Surrounded by a individually controllable 4 segment RGB LED Ring the MOVO® Series fixtures are much more than simple beam moving heads. With their high refresh rate of 1000Hz all MOVO® Series fixtures are suitable for TV and motion picture applications.

High precision motors with continuous PAN and TILT let you move your light with smooth precision. Big and bright 2.5" TFT displays let you easily setup your MOVO® series fixtures as they all feature 4 selectable dimmer curves and lots of intense colour macros.

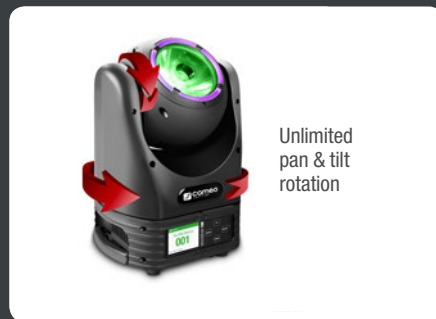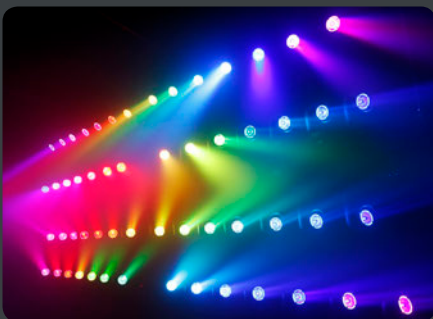

Featuring

OSRAM

MOV0® BEAM 100

UNLIMITED ROTATION BEAM MOVING HEAD WITH LED RING

The MOV0® BEAM 100 is a powerful ultra-fast moving head delivering a narrow and defined 5,5° beam. A central high-performance 60 watt Osram LED produces rich RGBW mixes with saturated primary colours, subtle pastel hues and natural shades of white. It is surrounded by an RGB LED ring with 4 individually controllable segments to enable a multitude of spectacular beam effects. With its 1,000 Hz refresh rate the fixture is perfect for motion picture and TV applications.



Driven by two high-speed, high-torque motors the MOV0® BEAM 100 provides continuous pan and tilt with smooth precision. It sports a bright 2.5" TFT display with touch sensitive buttons for convenient configuration, DMX control and amazing automated modes. Linear dimming with 4 selectable curves, a rapid strobe and colour temperature correction add to a brilliant and exciting performance. The MOV0® BEAM 100's compact compound housing features fan cooling to ensure reliable operation and extended LED life. It comes with an omega bracket for a variety of mounting options.

FEATURES

- ▶ Ultra-bright 60 W Osram RGBW LED for saturated primary colours, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED surround with single pixel control
- ▶ 2 high-speed motors for ultra-fast continuous pan and tilt
- ▶ Fantastic automated Modes
- ▶ 4 selectable dimming curves
- ▶ 3 DMX Modes and standalone, master or slave operation
- ▶ 2.5" TFT display and touch sensitive buttons for intuitive configuration
- ▶ Omega Mounting bracket included



PHOTOMETRICAL DATA

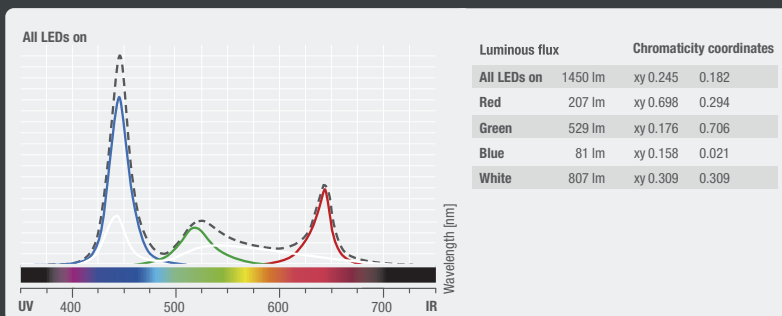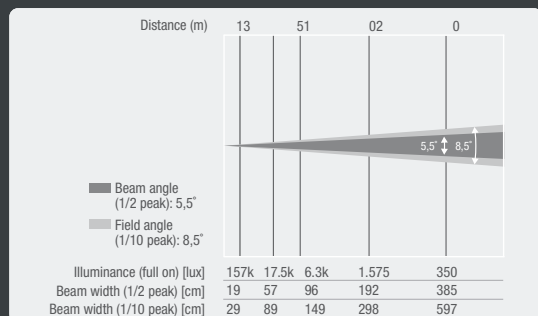

SPECIFICATIONS

Product Number:	CLMB100
Product Type:	LED Moving Lights
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	60 W OSRAM (Approx. 50.000 operating hours)
Refresh Rate:	1,000 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 15-Channel
DMX Functions:	Auto Programs, Colour Ring Macro Speed, Dimmer Fine, PAN, PAN Unlimited Rotation, Pan/ Tilt Fine, PAN/ TILT Macros, Pan/ Tilt Speed, RGBW, Stroboscope, TILT, TILT Unlimited Rotation, Colour Fade, Colour Jump, Colour Macro, Colour Ring Macro, Dimmer, Dimmer Colour Ring, Dimmer Curve, RGB Ring 1-4, Strobe Colour Ring

PAN / TILT Movement:	Unlimited 540° / 270°
Standalone Modes:	Static Mode, Auto Programs
Controls:	Enter, Value Up, Mode, Value Down
Indicators:	2.5" TFT display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	130 W
Power Connector:	Blue and White Power I/O
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	157,000 lx @ 1m
Luminous Flux:	1,450 lm
Dimensions (W x H x D):	210 x 299 x 210mm
Weight:	5.2 kg



NEW

MOV0® BEAM Z 100

UNLIMITED ROTATION BEAM MOVING HEAD WITH LED RING AND ZOOM

Featuring

OSRAM



Taking the success of the MOV0 Beam 100 one step further, the Mov0® Beam Z 100 is an ultra-fast moving head featuring a powerful motor zoom. With a zoom range of 4 to 30 degrees, it delivers tightly focussed beams, beautiful wash and amazing zoom effects. A central high-performance 60 watt OSRAM LED with a 50,000 hour lifespan produces rich RGBW mixes with saturated primary colours, subtle pastel hues and natural shades of white. It is surrounded by an RGB LED ring with 4 individually controllable segments that enable a spectacular lighting performance. Driven by two high-speed, high-torque motors the MOV0 BEAM Z 100 provides endless pan and tilt rotation with smooth precision. It sports a bright 2.5" TFT display with touch sensitive buttons for convenient configuration, 3 modes of DMX control and spectacular automated modes. Seamless dimming with 4 selectable curves and a rapid strobe add to a brilliant and exciting performance. The MOV0 BEAM Z 100's compact ABS and metal housing features temperature controlled fan cooling to ensure reliable operation and extended LED life. It comes with an omega bracket for a variety of mounting options.

FEATURES

- ▶ Ultra-bright 60 W OSRAM RGBW LED for saturated primary colours, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED ring with single pixel control
- ▶ 2 high-speed, high torque motors for ultra-fast unlimited pan and tilt
- ▶ Motor zoom with 4° to 30° range
- ▶ Spectacular automated modes
- ▶ 4 selectable dimming curves
- ▶ 3 DMX modes, standalone or master/slave operation
- ▶ 2.5" TFT display and touch panel for intuitive configuration
- ▶ Omega mounting bracket included




PHOTOMETRICAL DATA

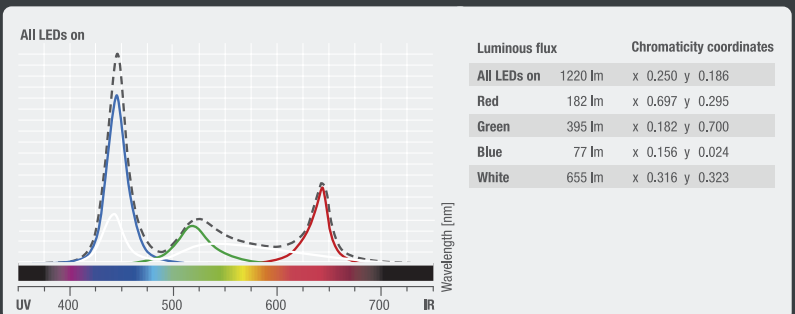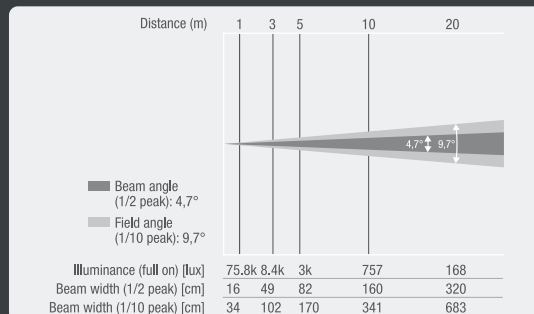

SPECIFICATIONS


Product Number:	CLMBZ100
Product Type:	LED Moving Lights
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	60 W OSRAM (Approx. 50.000 operating hours)
Refresh Rate:	1,000 Hz
Dispersion:	4 - 30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	16-channel, 5-channel, 36-channel
DMX Functions:	PAN, colour jump, Colour Ring Macro Speed, Pan/Tilt Speed, Zoom, colour fade, Pan/Tilt Macros, TILT UNLIMITED ROTATION, auto programs, Pan/Tilt fine, TILT, PAN UNLIMITED ROTATION, Stroboscope, Dimmer Fine, Strobe Colour Ring, Dimmer Curve, RGBW, Colour Ring Macro, Dimmer Colour Ring, RGB Ring 1-4, colour macro

PAN / TILT Movement:	Unlimited
Standalone Modes:	Static Mode, Auto Programs
Controls:	Enter, Value Up, Mode, Value Down
Indicators:	2.5" TFT display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	140 W
Power Connector:	Blue and White Power I/O
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	75780 lx @ 1 m
Luminous Flux:	1,220 lm
Dimensions (W x H x D):	210 x 299 x 210mm
Weight:	6.5 kg

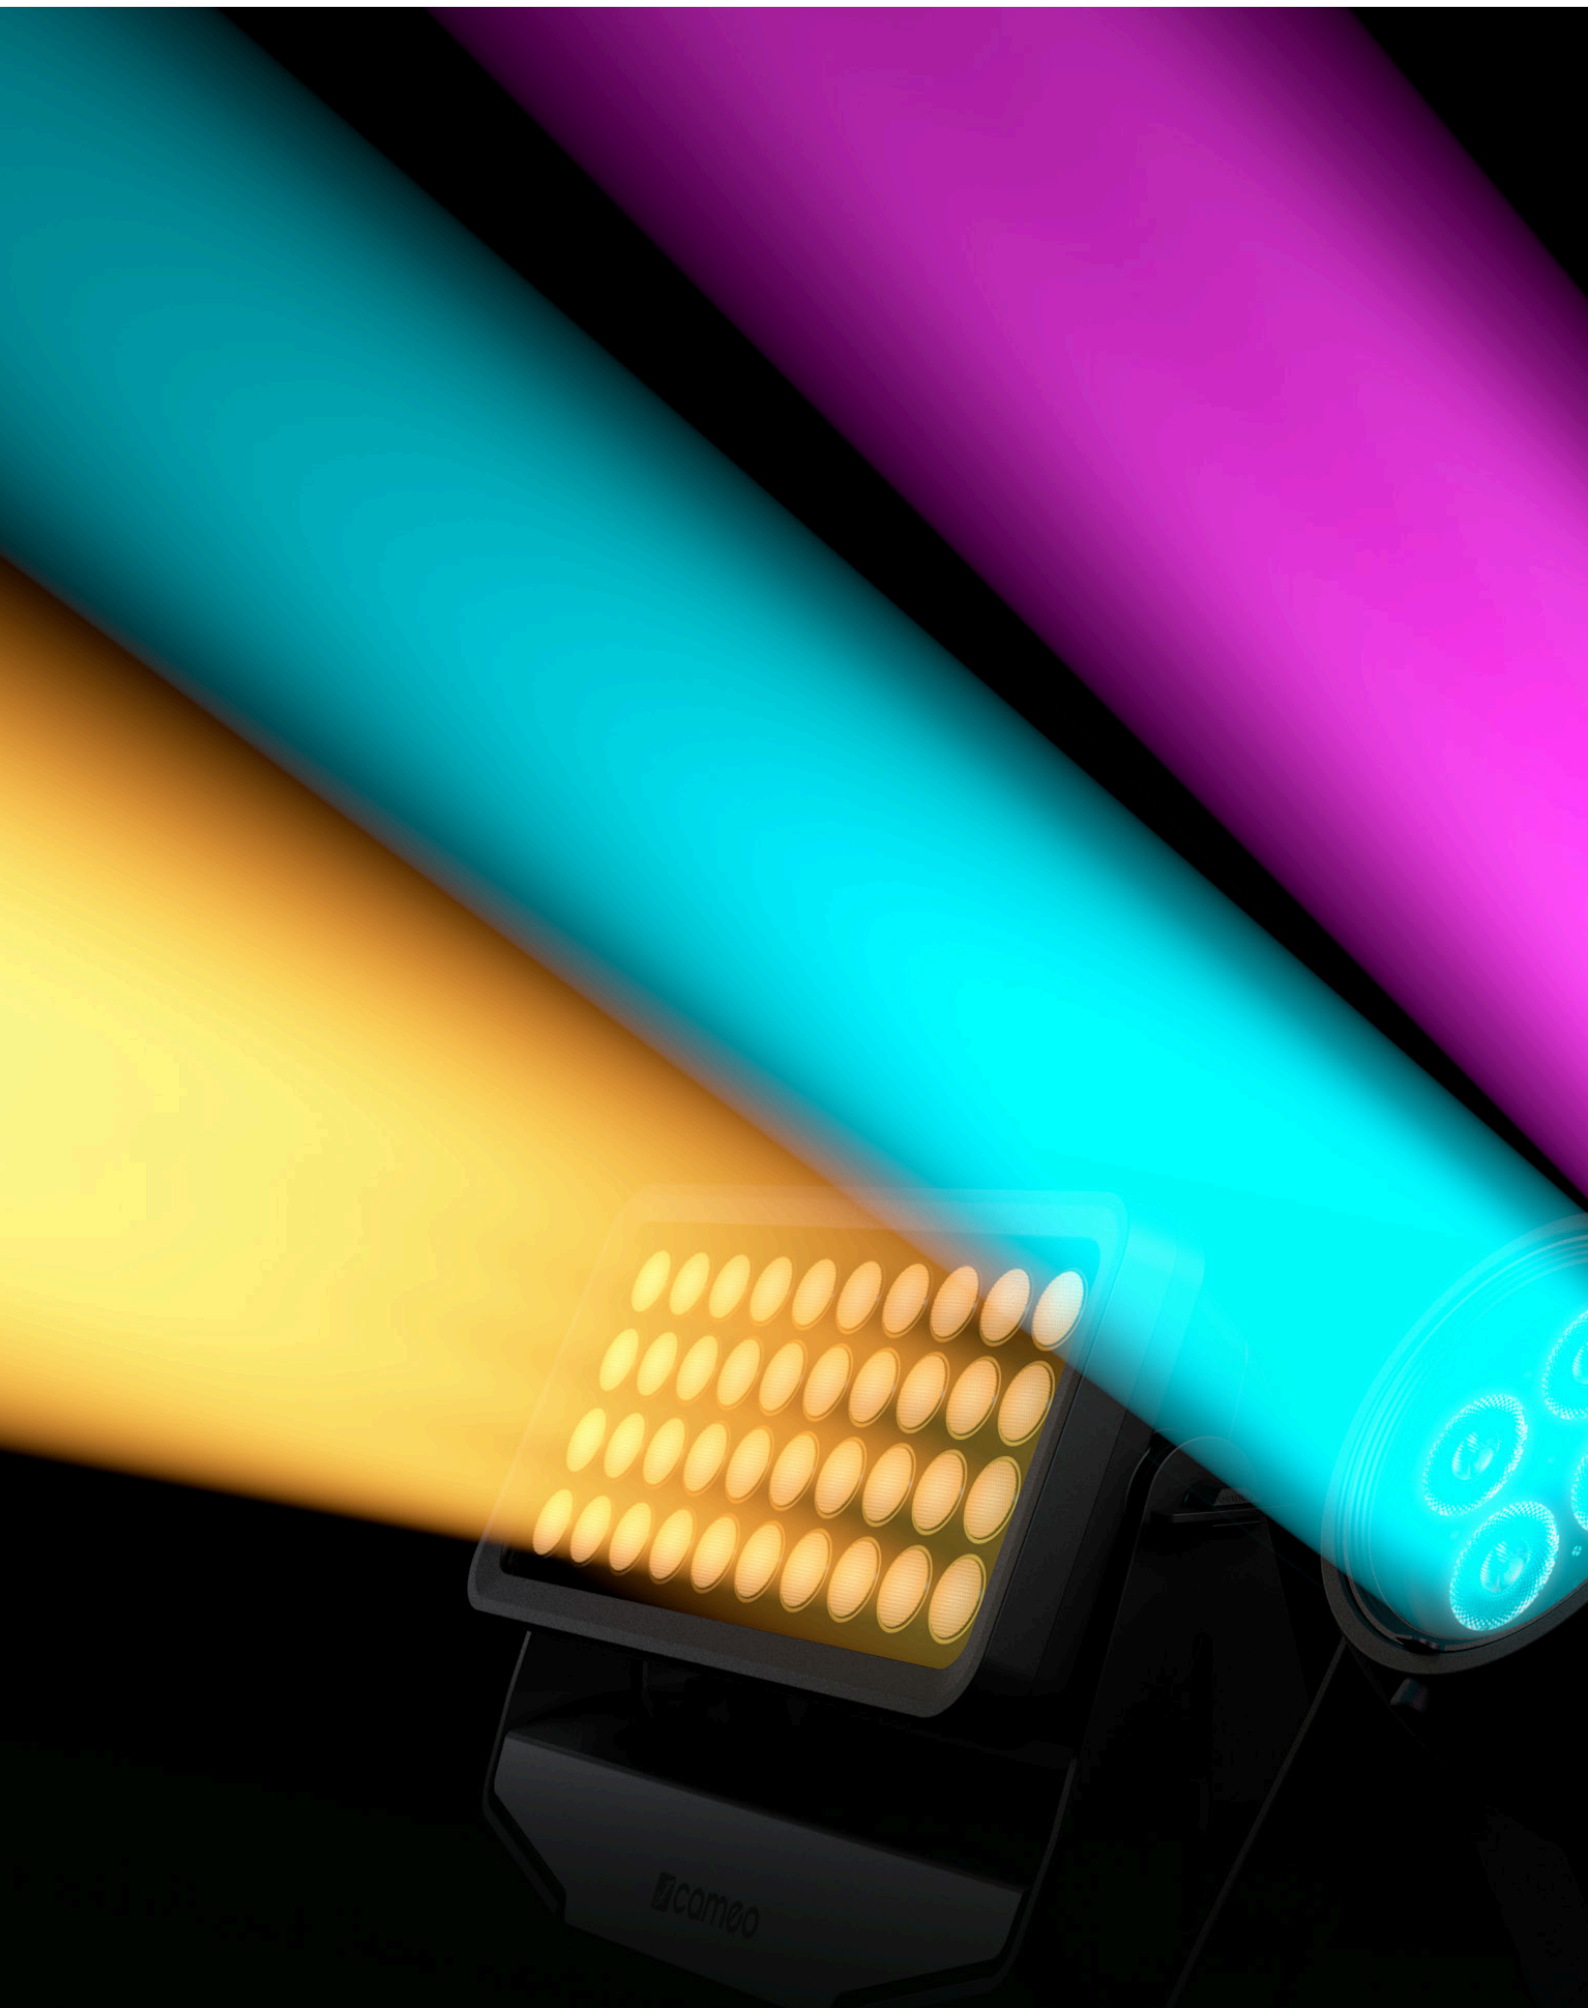

ZENIT[®] SERIES

Designed and engineered for the most demanding applications, the Zenit[®] Series is thoroughly professional down to every detail. With first-class features such as lightweight, yet durable aluminium housings, top-of-the-line Cree and Osram LEDs or Neutrik connectors Zenit[®] luminaires sport elegant contemporary looks. Add W-DMX[™] and RDM control capability, 16-bit technology and the IP65 rating, and you've got a five-star line of fixtures for awesome event lighting indoors and outdoors. When it comes to professional performance, outstanding reliability and exceptional value, Cameo's Zenit[®] Series truly shines.

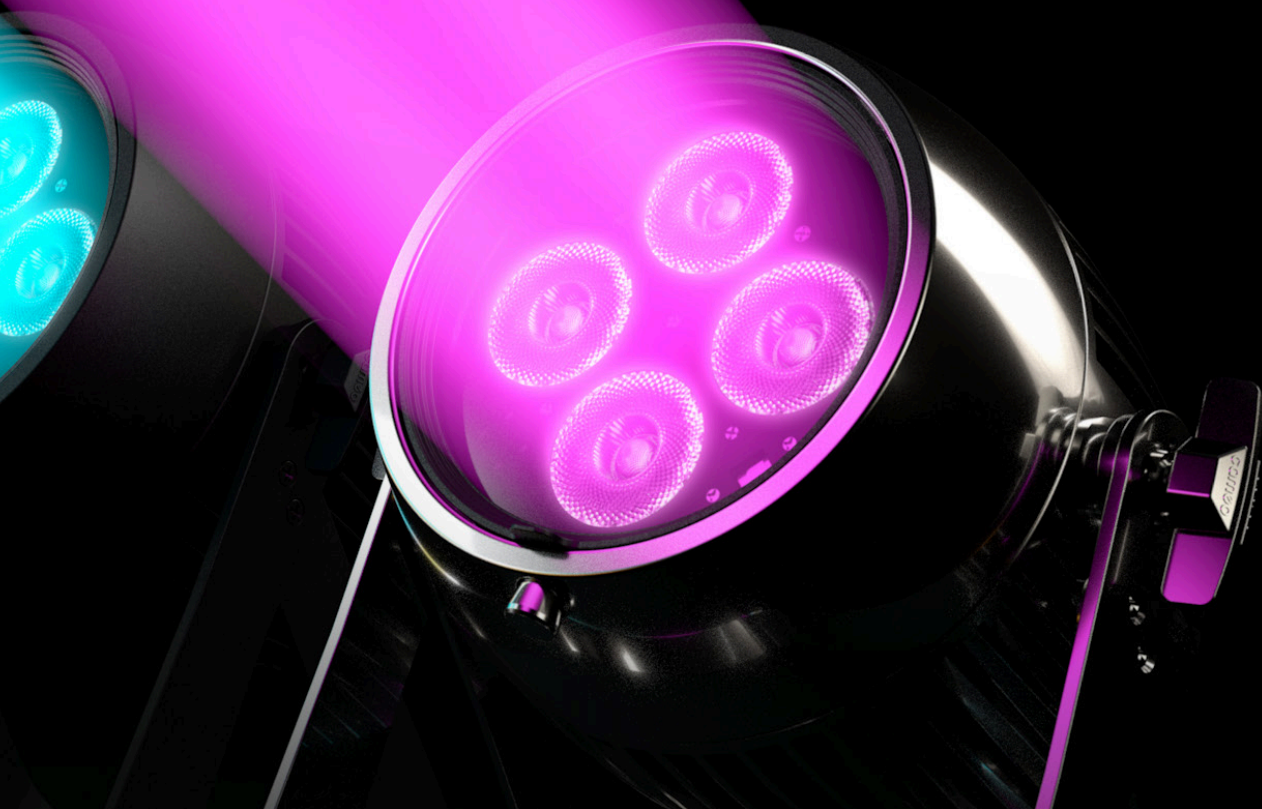



NEW

ZENIT® W600

OUTDOOR LED WASHLIGHT

Featuring

WIRELESS SOLUTION
MADE IN SWEDENCREE
LEDs

Equipped with a total of forty 15 W RGBW Cree LEDs for a massive 21,000 lm output, the Cameo ZENIT® W600 is a powerful IP65 rated washlight for demanding outdoor applications. In addition to standard DMX and RDM capability plus a rich variety of stunning automated programs it sports a built-in 2.4 GHz W-DMX™ transceiver for convenient wireless control. Featuring advanced 16-bit technology for high-resolution colour mixing and dimming and a 16° beam spread, the ZENIT® W600 projects hugely intense, uniform washes. With colour temperature and individual LED colour correction, four selectable dimming curves and fully adjustable halogen lamp-like dimming response, the fixture is the perfect tool for highly professional lighting.

The ZENIT® W600's diecast aluminium housing integrates temperature controlled fans that ensure optimized, low noise operation while a bright OLED display with four touch buttons permits easy, intuitive configuration. A security lock prevents unauthorized access to the luminaire's menu settings.

For maximum versatility, the ZENIT® W600 sports Cameo's innovative SnapMag® technology. It allows you to add filter frames or barn doors in seconds without the need for tools or dismantling. Magnetic SnapMag® frames with precision light shaping diffusers and barn doors are available as dedicated accessories.



FEATURES

- ▶ 40 x 15 W RGBW CREE LEDs with 21,000 lm total output for uniform and powerful colour mixing
- ▶ Optional magnetic SnapMag® filter frames with innovative light shaping diffusers available offering an additional choice of circular 25°, 45° or 100° and elliptical 60° x 10° beam angles for extra versatility
- ▶ Built-in 2.4 GHz W-DMX™ transceiver
- ▶ Wireless Master & Slave Function, Wireless DMX, standard DMX, RDM (via DMX and W-DMX™) plus auto programs
- ▶ IP65 rating for constant outdoor use
- ▶ Temperature controlled fan for optimized and low noise operation
- ▶ 16-bit technology for high-resolution colours and dimming
- ▶ Colour temperature and individual LED colour correction
- ▶ Four ultra smooth dimming curves and adjustable halogen lamp-like dimming response
- ▶ OLED display with four touch buttons for easy configuration
- ▶ Security lock against unauthorized menu access





PHOTOMETRIC DATA

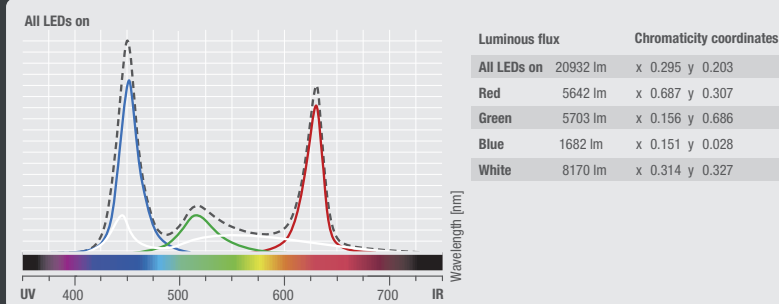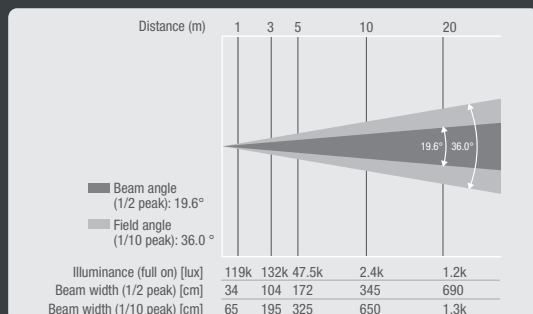

SPECIFICATIONS

Product Number:	CLZW600
Product Type:	18° Beam, 35° Field (without diffuser)
Colour Spectrum:	RGBW
Number Of LEDs:	40
LED Type:	15 W Cree (ca. 50000 Operating Hours)
Refresh Rate:	800 Hz, 1200 Hz, 2000 Hz, 25 kHz
Dispersion:	18° Beam, 35° Field (without diffuser)
Lens:	PE and tempered glass
DMX Input / Output:	3-Pin IP65 & 5-Pin IP65 / 3-Pin IP65 & 5-Pin IP65
DMX Mode:	2-ch, 3-ch, 4-ch, 8-1ch, 10 ch, 15 ch, 8-2 ch
DMX Functions:	CTC (Colour temperature correction), Dimmer, Dimmer curve, Dimmer fine, RGBW, RGBW fine, Strobe, Auto programs, Colour macro, Dimmer response
Controls:	Enter, Mode, Value up / down
Indicators:	OLED Display

Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	565 W
Standalone Modes:	Colour macro, Tunable white, User colours, Auto programs, Master / slave mode
Power Connector:	IP65
Housing Material:	Aluminium
Housing Colour:	Black
Cooling:	IP65 temperature-controlled fans
Protection Class IP:	IP65
Luminous Flux:	21,000 lm
Operating Temperature:	- 15 °C - 45 °C
Dimensions (W x H x D):	463x161x291mm
Weight:	12,5 kg

AVAILABLE ACCESSORIES

- ▶ ZENIT® W600 SM B4 - SnapMag® 4-way barn doors for ZENIT® W600
- ▶ ZENIT® W600 SM LSD 20 - SnapMag® filter 25° for ZENIT® W600
- ▶ ZENIT® W600 SM LSD 100 - SnapMag® filter 100° for ZENIT® W600
- ▶ ZENIT® W600 SM LSD 40 - SnapMag® filter 45° for ZENIT® W600
- ▶ ZENIT® W600 SM LSD 6010 - SnapMag® filter 60° x 10° for ZENIT® W600

(see page 83 - Accessories)



NEW

ZENIT® B60

BATTERY-POWERED W-DMX™ IP65 PAR LIGHT BLACK / CHROME

Featuring

WIRELESS SOLUTION
MADE IN SWEDENCREE
LEDs

With battery operation, built-in wireless DMX and rated IP65, the Cameo Zenit® B60 is ready for demanding indoor and outdoor lighting applications. The highly professional PAR light sports four 15W RGBW Cree LEDs with a 50,000 hour lifetime and powerful 1,900 lm output for brilliant, uniform colours with a precise 11° beam spread. It comes with two specially designed light shaping diffusers offering a choice of 25° or 40° beam angles while maintaining output for extra versatility.

In addition to seven modes of DMX, RDM and IR remote or manual control via the fixture's display the Zenit® B60 incorporates a 2.4 GHz W-DMX™ receiver. Developed by Wireless Solution Sweden AB, W-DMX™ has become the unofficial standard for professional wireless lighting control. The luminaire's super capacity Lithium-Ion battery is made by LG Chem providing reliable performance up to 24 hours from a single charge with adjustable runtime in one hour increments, an intelligent control calculates the brightness of the PAR automatically.

The PAR light's battery management system prevents overcharging and exhaustive discharge for extended battery life. Sporting a 3,600 Hz refresh rate for flicker-free performance and highly efficient convection cooling for noiseless operation, the Zenit B60 is perfect for motion picture and TV applications. with highly efficient convection cooling providing noiseless performance. It utilizes 16-bit technology for smooth high-resolution colour mixing and dimming and includes individual LED colour temperature correction plus a selection of dimming curves with adjustable response. The aluminium housing features a bright OLED display with 4 touch buttons for easy configuration while a security lock prevents unauthorized menu access. The Cameo Zenit® B60 is available in black (CLZB60BLSD) or chrome (CLZB60CLSD). It can also be programmed to provide emergency lighting to a DC outlet.

FEATURES

- ▶ Professional battery-operated W-DMX™ PAR can with IP65 rating
- ▶ 4 x 15 W RGBW Cree LEDs with 1,900 lm total output for uniform colour mixes
- ▶ Long-life super capacity LG Chem lithium-ion battery for reliable operation
- ▶ Battery management system prevents overcharging and exhaustive discharge
- ▶ Built-in 2.4 GHz W-DMX™ receiver
- ▶ Security lock against unauthorized menu access
- ▶ Wireless DMX, standard DMX, RDM and IR control or via the 4-button display includes 2 light shaping diffusers for flexible 11°, 25° or 40° Beam spread options, elliptical diffuser 60° x 10° available as accessory
- ▶ 16-bit technology for high-resolution colours and dimming
- ▶ OLED display with 4 touch buttons for easy configuration
- ▶ Emergency lighting functionality







OPTIONAL
CHARGING FLIGHT CASE
AVAILABLE

Equipment is not included

INCLUDED
ZENIT® LSD 20 / 40
LIGHT SHAPING DIFFUSER 25° / 40°
FOR ZENIT B 60

PHOTOMETRICAL DATA

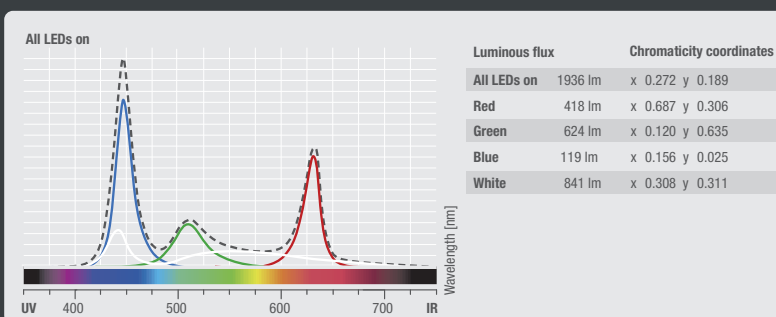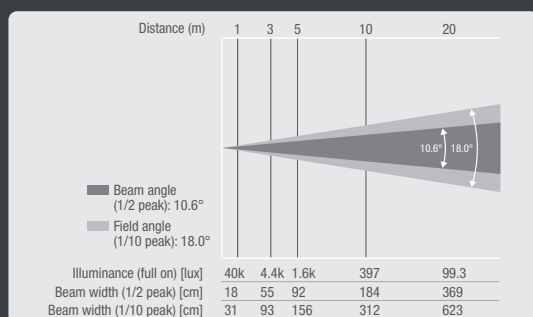


SPECIFICATIONS

Product Number:	CLZB60BLSD (Black) / CLZB60CLSD (Chrome)
Product Type:	Outdoor LED PAR Lighting
Colour Spectrum:	RGBW
Number Of LEDs:	4
LED Type:	15 W Cree
Refresh Rate:	3,600 Hz
Dispersion:	Without Diffusor - (Beam) 10.6° / (Field) 18°
DMX Input / Output:	5-Pin IP65
DMX Mode:	2, 3, 4, 8-1, 8-2, 10, 15-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, CTC (Colour Temperature Correction), Dimmer, Dimmer Curve, Dimmer Fine, Dimmer Response, Reset, RGBW, RGBW Fine, Strobe
Controls:	Enter, Mode, Value Up / Down
Indicators:	OLED Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Power Connector:	IP65
Power through connector:	IP65

Standalone Modes:	Auto Programs, Colour Fade, Colour Jump, Colour Macro, Dimmer Curve, Dimmer Response, Display Lock, Master / Slave Mode, Static Colour, Strobe, White Balance Adjustable
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black / Chrome
Protection Class IP:	IP65
Battery type:	LG F1 Lithium-Ion Battery
Battery Capacity:	217 Wh
Battery Operation Time At Maximum Load:	Up To 24 Hours
Charging Time:	4 H
Cooling:	Convection
Illuminance:	40,000 lx @ 1 m
Luminous Flux:	1,900 lm
Operating Temperature:	- 15°C - 45 °C
Dimensions (W x H x D):	187x 187 x 164 mm
Weight:	4.8 kg

AVAILABLE ACCESSORIES

- ▶ ZENIT® B60 CASE - Charging flight case for six ZENIT® B60 (see page 82 - Accessories)
- ▶ ZENIT® LSD 6010 - Elliptical light shaping diffuser 60° x 10°

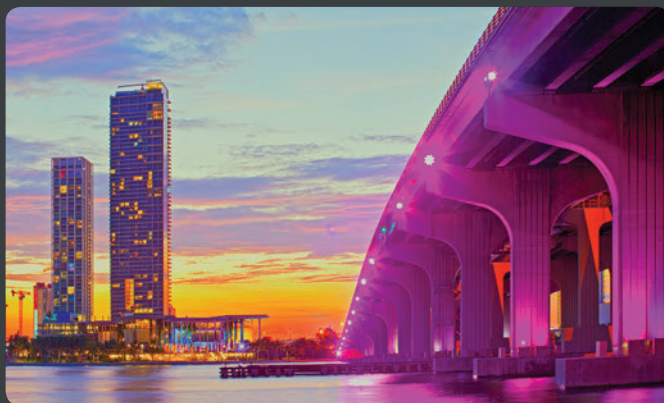

ZENIT® P130

PROFESSIONAL OUTDOOR PAR CAN IP65 WITH INNOVATIVE LIGHT SHAPING DIFFUSORS


Featuring


OSRAM
LED TECHNOLOGY INCLUDED

The Cameo Zenit® P130 is an IP65 rated outdoor PAR can with a sharp, tightly focussed beam angle of 8°. For an additional choice of 25° or 45° angles, it comes with two ultra-efficient light shaping diffusers which are specially designed to maintain the fixture's powerful illuminance. The Zenit® P130 is equipped with four 32W RGBW Osram OSTAR LEDs for brilliant, uniform colours while 16-bit technology enables high-resolution colour mixing and dimming. With a 3,600 Hz refresh rate and flicker-free operation the advanced Zenit® P130 is the perfect choice for motion picture and TV applications. Highly effective convection cooling ensures totally noise-free operation. Truly professional, the Zenit P130® is RDM-compatible and includes 7 modes of DMX control, exciting automated programs as well as master, slave and standalone capability. It features colour temperature and individual LED colour correction, a high-speed strobe, 4 selectable dimming curves and adjustable halogen lamp-like dimming response. A security lock prevents unauthorized menu access. To enable easy daisy-chaining, the heavy-duty die-cast aluminium housing provides innovative locking 5-Pin DMX and AC power inputs and outputs. A modern OLED display with 4 touch buttons allows easy, intuitive configuration.



FEATURES

- ▶ Professional IP65 outdoor PAR can with 4 x 32 W RGBW Osram OSTAR LEDs and 8° beam angle
- ▶ Includes 2 innovative light shaping diffusers for beam angles of 25° or 45° while maintaining transmission efficiency
- ▶ RDM capability
- ▶ 16-bit technology for high-resolution colours and dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour temperature and individual LED colour correction
- ▶ 4 ultra smooth dimming curves and adjustable halogen lamp-like dimming response
- ▶ 7 modes of DMX control plus master, slave and standalone capability
- ▶ OLED display with 4 touch buttons for easy configuration
- ▶ Security lock against unauthorized menu access
- ▶ Convection cooling for noise-free performance



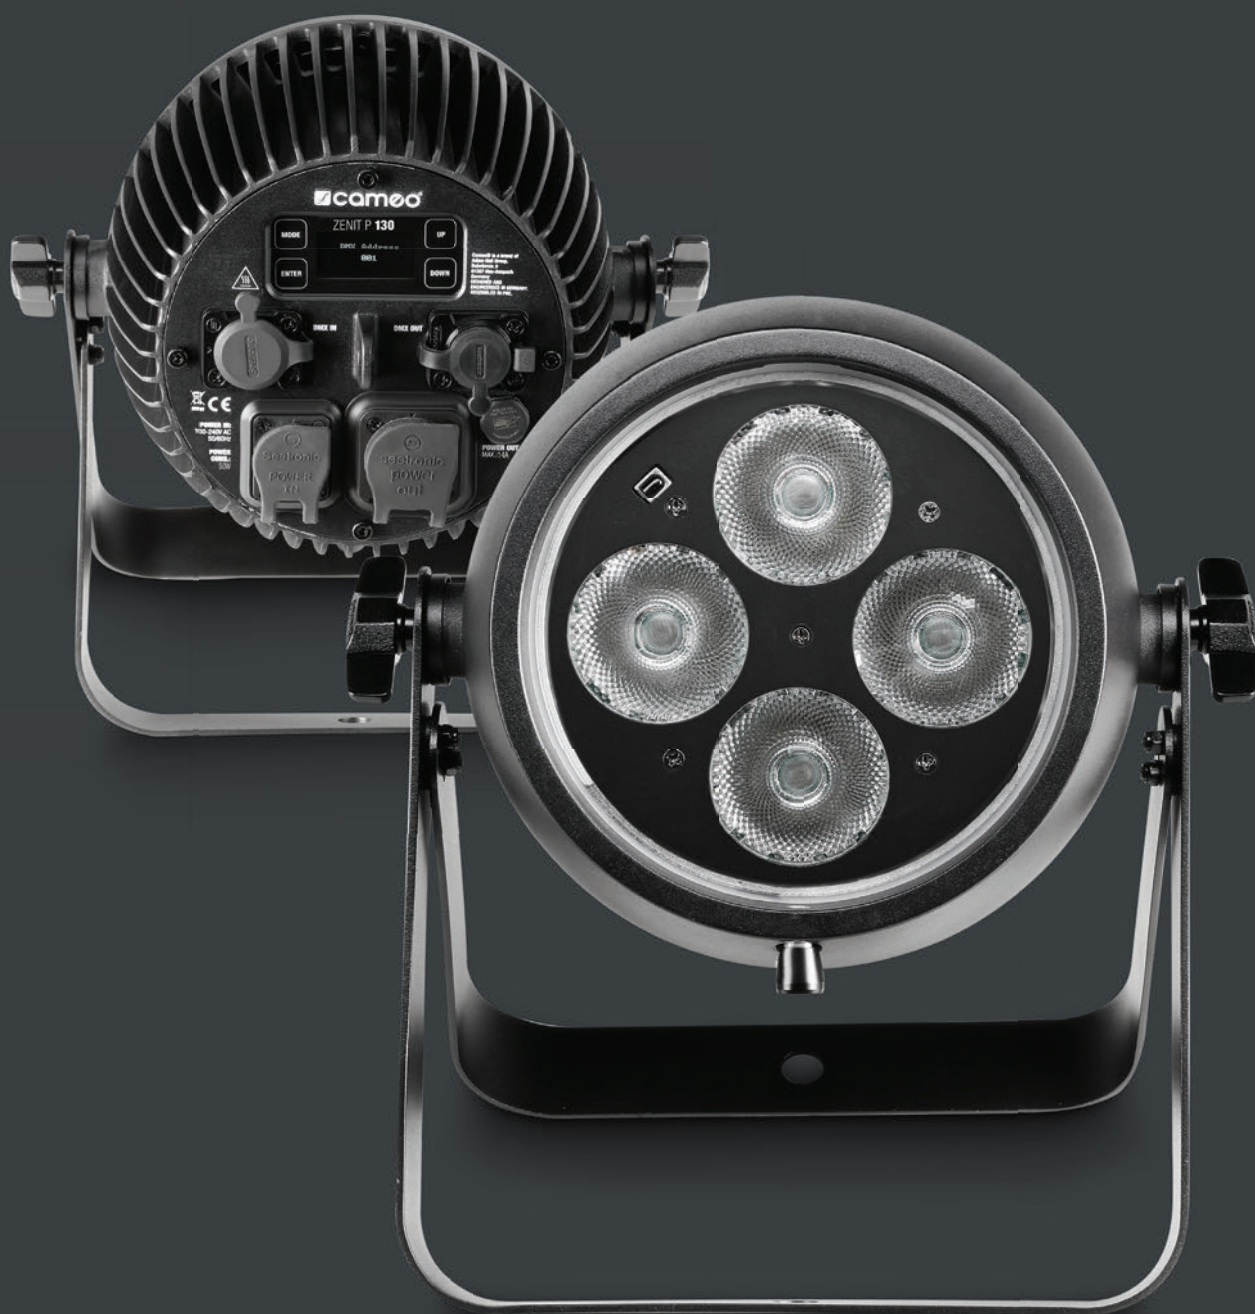

PHOTOMETRICAL DATA

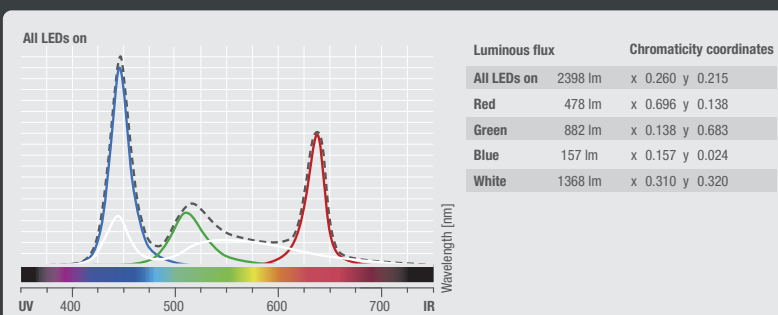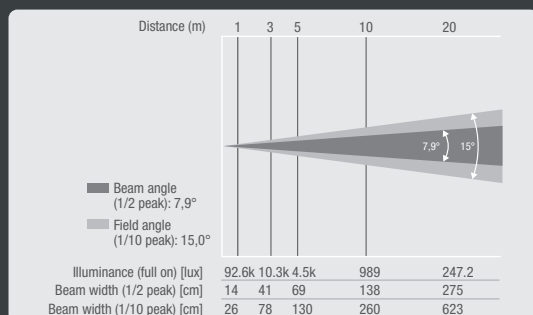

SPECIFICATIONS

Product Number:	CLZP130LSD
Product Type:	Outdoor LED PAR Lighting
Colour Spectrum:	RGBW
Number Of LEDs:	4
LED Type:	32 W Osram OSTAR LED (ca. 50.000 Operating Hours)
Refresh Rate:	3,600 Hz
Dispersion:	Without Diffusor - 7,9° Beam, 15° Field
DMX Input / Output:	5-Pin IP65
DMX Mode:	2, 3, 4, 8-1, 8-2, 10, 15-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, CTC (Colour Temperature Correction), Dimmer, Dimmer Curve, Dimmer Fine, Dimmer Response, Reset, RGBW, RGBW Fine, Strobe
Controls:	Enter, Mode, Value Up / Down
Indicators:	OLED Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz

Power Consumption:	155 W
Standalone Modes:	Auto Programs, Colour Fade, Colour Jump, Colour Macro, Dimmer Curve, Dimmer Response, Display Lock, Master / Slave Mode, Static Colour, Strobe, White Balance Adjustable
Power Connector:	IP65
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black
Protection Class:	IP65
Cooling:	Convection
Illuminance:	92,600 lx @ 1 m
Luminous Flux:	2,398 lm
Operating Temperature:	- 15 °C - 45 °C
Dimensions (W x H x D):	186.6 x 186.6 x 159 mm
Weight:	4.8 kg
Features:	IR Remote

AVAILABLE ACCESSORIES

- ZENIT® LSD 6010 - Elliptical light shaping diffuser 60° x 10° (see page 83 - Accessories)



ZENIT® P40

PROFESSIONAL OUTDOOR PAR CAN IP65 WITH INNOVATIVE LIGHT SHAPING DIFFUSORS

Featuring


OSRAM
LED TECHNOLOGY INCLUDED

The Cameo Zenit® P40 is an IP65 rated outdoor PAR can with a sharp, tightly focussed beam angle of 8°. For an additional choice of 25° or 45° angles, it comes with two ultra-efficient light shaping diffusers which are specially designed to maintain the fixture's powerful illuminance. The Zenit® P40 is equipped with four 10 W RGBW Osram OSTAR LEDs for brilliant, uniform colours while 16-bit technology enables high-resolution colour mixing and dimming. With a 3,600 Hz refresh rate and flicker-free operation the advanced Zenit® P40 is the perfect choice for motion picture and TV applications. Highly effective convection cooling ensures totally noise-free operation. Truly professional, the Zenit® P40 is RDM-compatible and includes 7 modes of DMX control, exciting automated programs as well as master, slave and standalone capability. It features colour temperature and individual LED colour correction, a high-speed strobe, 4 selectable dimming curves and adjustable halogen lamp-like dimming response. A security lock prevents unauthorized menu access. To enable easy daisy-chaining, the heavy-duty die-cast aluminium housing provides innovative locking 5-Pin DMX and AC power inputs and outputs. A modern OLED display with 4 touch buttons allows easy, intuitive configuration.



FEATURES

- ▶ Professional IP65 outdoor PAR can with 4 x 10 W RGBW Osram OSTAR LEDs and 8° Beam angle
- ▶ Includes 2 innovative light shaping diffusers for beam angles of 25° or 45° while maintaining transmission efficiency
- ▶ RDM capability
- ▶ 16-bit technology for high-resolution colours and dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour temperature and individual LED colour correction
- ▶ 4 ultra smooth dimming curves and adjustable halogen lamp-like dimming response
- ▶ 7 modes of DMX control plus master, slave and standalone capability
- ▶ OLED display with 4 touch buttons for easy configuration
- ▶ Security lock against unauthorized menu access
- ▶ Convection cooling for noise-free performance



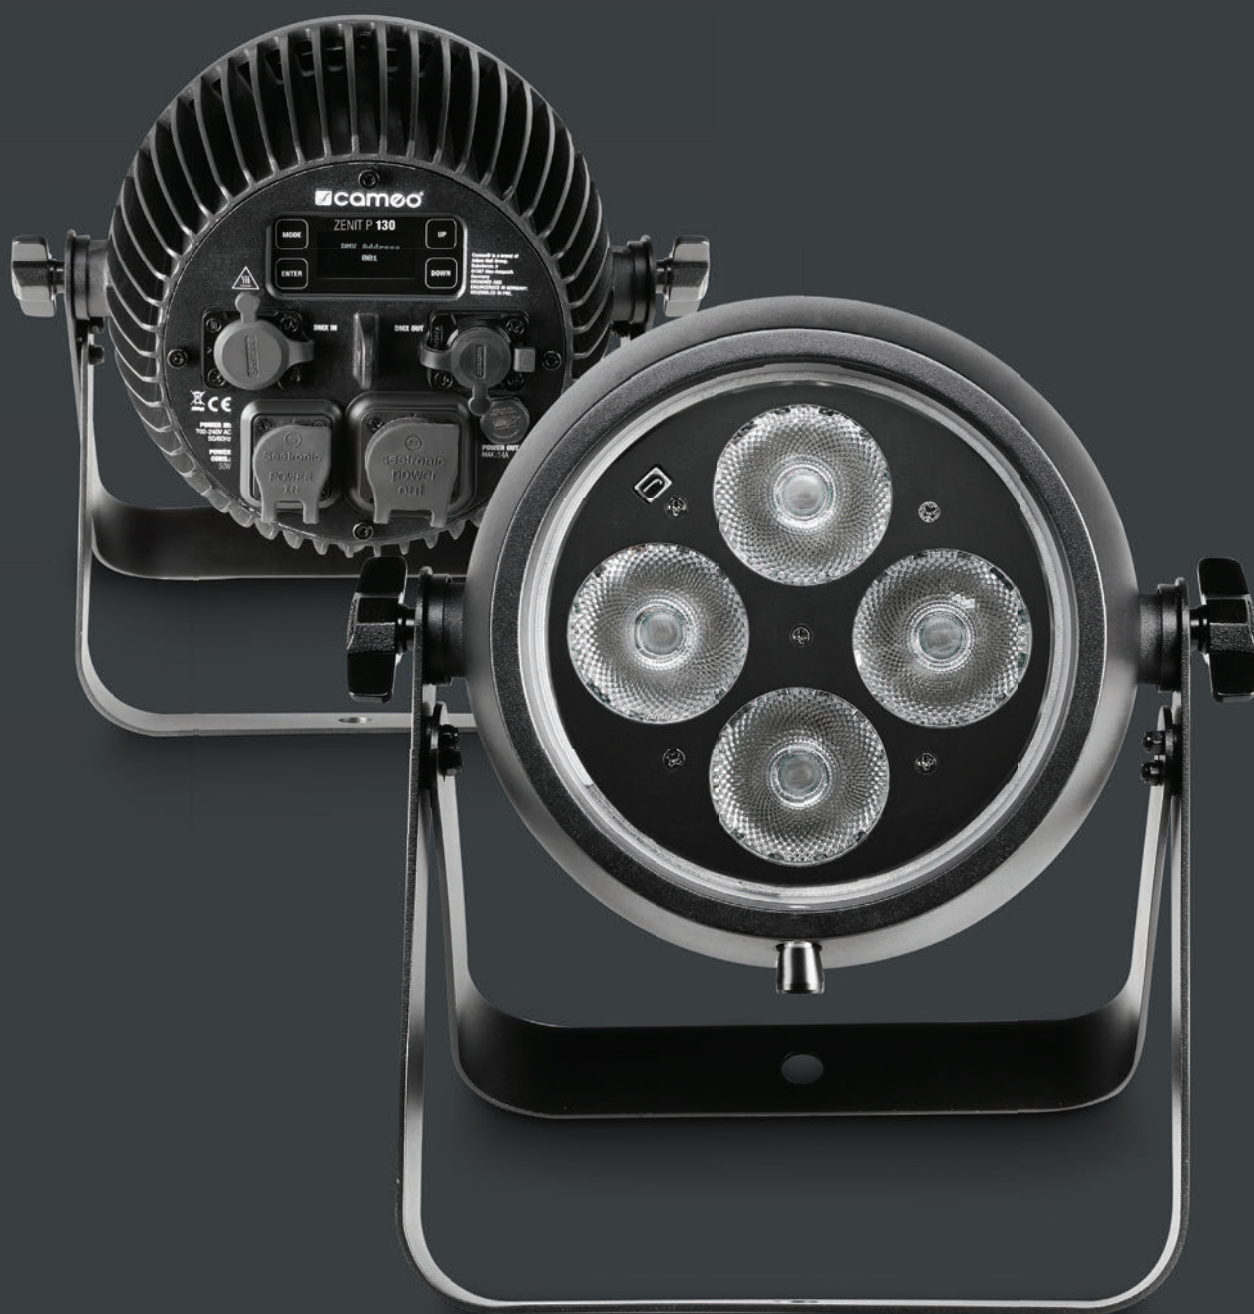

PHOTOMETRICAL DATA

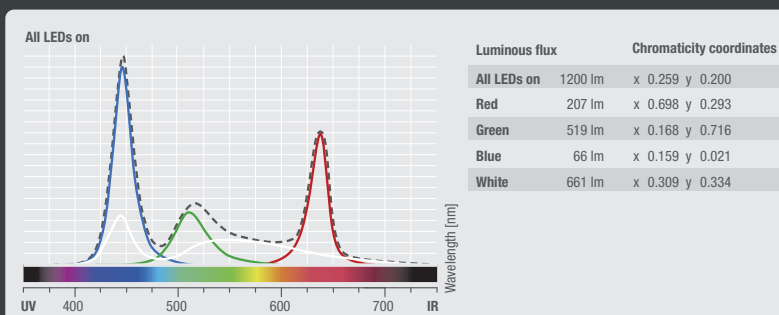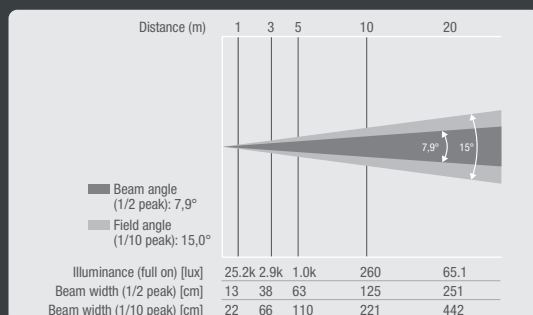

SPECIFICATIONS

Product Number:	CLZP40LSD
Product Type:	Outdoor LED PAR Lighting
Colour Spectrum:	RGBW
Number Of LEDs:	4
LED Type:	10 W Osram OSTAR LED (ca.50.000 operating hours)
Refresh Rate:	3,600 Hz
Dispersion:	Without Diffusor - 7,9° Beam, 15° Field
DMX Input / Output:	5-Pin IP65
DMX Mode:	2, 3, 4, 8-1, 8-2, 10, 15-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, CTC (Colour Temperature Correction), Dimmer, Dimmer Curve, Dimmer Fine, Dimmer Response, Reset, RGBW, RGBW Fine, Strobe
Controls:	Enter, Mode, Value Up / Down
Indicators:	OLED Display
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W

Standalone Modes:	Auto Programs, Colour Fade, Colour Jump, Colour Macro, Dimmer Curve, Dimmer Response, Display Lock, Master / Slave Mode, Static Colour, Strobe, White Balance Adjustable
Power Connector:	IP65
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black
Cooling:	Convection
Protection Class:	IP65
Illuminance:	25,200 lx @ 1 m
Luminous Flux:	1,200 lm
Operating Temperature:	- 15 °C - 45 °C
Dimensions (W x H x D):	186.6 x 186.6 x 159 mm
Weight:	4.8 kg
Features:	IR Remote

AVAILABLE ACCESSORIES

- ZENIT® LSD 6010 - Elliptical light shaping diffuser 60° x 10° (see page 83 - Accessories)



ZENIT® Z120

PROFESSIONAL IP65 OUTDOOR ZOOM PAR LIGHT

The Cameo ZENIT® Z120 is an RDM enabled high output zoom PAR can for demanding professional applications. It employs a single long-life 120 watt RGBW COB LED and 16-bit technology for vivid high-definition colour mixes with maximum uniformity and perfect dimming behaviour. Covering a range from 7° to 55°, the motorised zoom provides flexible illumination from tightly focused, narrow beams to wide, diffuse washes.

With a 3,600 Hz refresh rate for flicker-free operation and IP65 rating the ZENIT® Z120 is eminently suitable in TV, film and outdoor use. The PAR can's advanced features include colour temperature correction, variable white balance and four selectable dimming curves with adjustable response to mimic the ramp-down of halogen bulbs.



Sporting 7 modes of DMX control, the ZENIT® Z120 is also capable of master, slave and standalone operation. A backlit four-button display facilitates menu navigation and configuration while a security lock prevents unauthorized access.

The Cameo ZENIT® Z120's heavy-duty metal enclosure utilises highly efficient convection cooling for silent operation. The multi-voltage fixture runs on 100 – 240 V AC with Neutrik powerCON TRUE1 and 5-pin X-HD connectors enabling mains and DMX daisy chaining. The adjustable twin bracket allows for easy rigging and doubles as a floor stand.



FEATURES

- ▶ Professional high output PAR with 7° – 55° zoom
- ▶ Colour temperature correction
- ▶ 4 selectable HD dimming curves with adjustable response
- ▶ 16-bit technology for uniform HD colours & perfect dimming behavior
- ▶ 120 W RGBW COB LED
- ▶ RDM enabled
- ▶ Variable white balance
- ▶ Flicker free, ideal for TV and film applications
- ▶ IP65 rating for outdoor use
- ▶ 7 modes of DMX control plus master, slave and standalone operation
- ▶ Neutrik powerCON TRUE1 and 5-Pin X-HD connectors



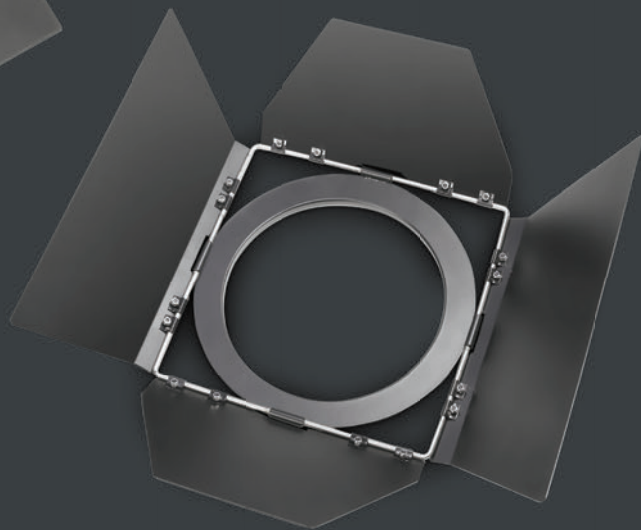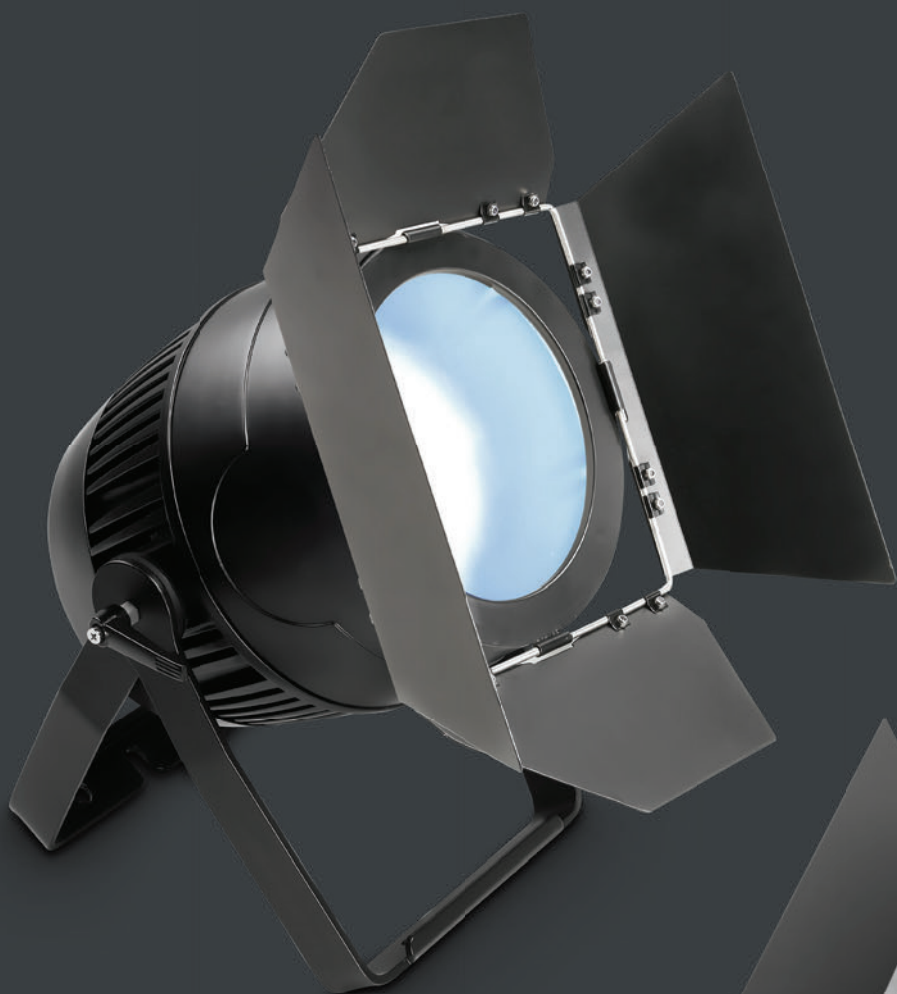

PHOTOMETRICAL DATA

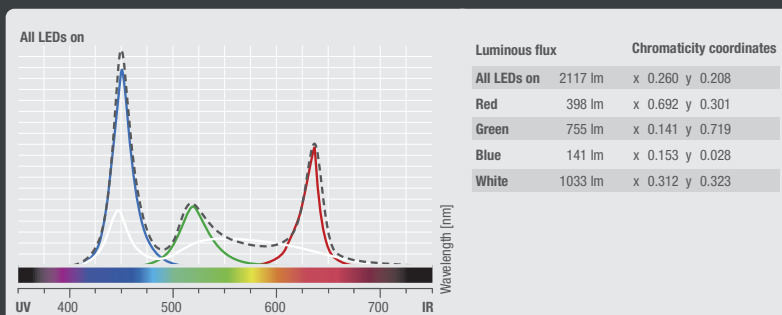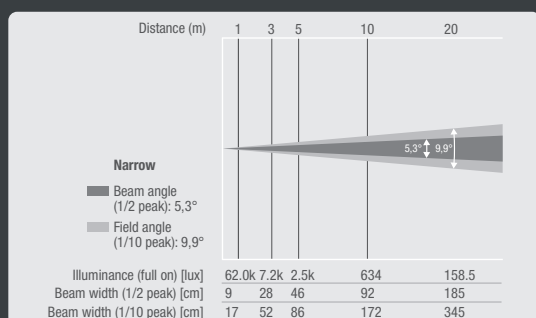

SPECIFICATIONS

Product Number:	CLZZ120
Product Type:	LED PAR Lighting
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	120 W (ca. 50000 Operating Hours)
Refresh Rate:	3,600 Hz
Dispersion:	5 - 55 °
DMX Input / Output:	5-Pin Neutrik X-HD
DMX Mode:	3, 4, 5, 9, 10, 11, 17-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, CTC (Colour Temperature Correction), Dimmer, Dimmer Curve, Dimmer Fine, Dimmer Response, Reset, RGBW, RGBW Fine, Strobe
Controls:	Enter, Mode, Value Up / Down
Indicators:	Backlit LCD

Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	180 W
Standalone Modes:	Colour Fade, Colour Jump, Colour Macro, Dimmer Curve, Dimmer Response, Display Lock, Master / Slave Mode, Static Colour, Strobe, White Balance Adjustable
Power Connector:	Neutrik powerCON TRUE1 IN (NAC3FX-W) / OUT (NAC-MFX-W)
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black
Cooling:	Convection
Protection Class:	IP65
Illuminance:	62,000 lx @ 1 m
Luminous Flux:	2,117 lm
Operating Temperature:	- 15 °C - 45 °C
Dimensions (W x H x D):	230 x 230 x 300 mm
Weight:	8.3 kg

AVAILABLE ACCESSORIES


- ZENIT® Z120 BARN DOORS - Barn doors for ZENIT® Z120 (see page 84 - Accessories)





FLAT PRO[®] SERIES

When confined spaces necessitate the use of compact lighting fixtures Cameo provides the ideal solution with Flat Pro series PAR cans. Featuring RGBWA color mixing and high refresh rates they are available with 7, 12 or 18 high-performance 10 watt LEDs and in IP65 rated outdoor versions. All Flat Pro lights include numerous functions, automated programs, DMX and sound control plus a versatile mounting bracket. Operation is dead silent due to convection cooling.

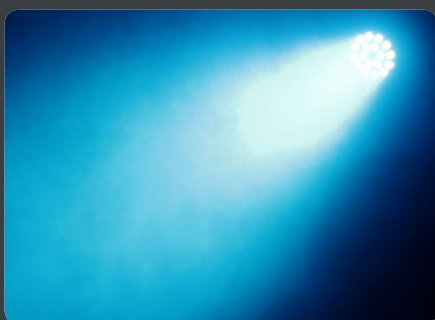

FLAT PRO 18 / IP65

18 x 10 W FLAT LED RGBWA PAR LIGHT
IN BLACK HOUSING

AVAILABLE
AS **IP65** OR
INDOOR VERSION

The Cameo FLAT PRO series is a professional PAR light series for exciting, creative indoor and outdoor lighting. With a high light output and 30° beam angle the super slim fixtures are most suitable where space is limited while the convection cooling design allows a 100% Silent operation. Ultra-bright high performance 10 watt RGBWA LEDs produce a huge range of colours from soft pastel hues to rich, warm tints, and the 3,000 Hz Refresh Rate eliminates flicker. The FLAT PRO series sports a total of 5 DMX modes with multiple functions, built-in programs and an LED Display with 4 controls for easy manual operation. It also provides master, slave and standalone capability.



The IP65 versions are totally protected against dust and low pressure water jets from all directions. The purpose designed die-cast enclosure includes dedicated screw connectors for DMX signal and power input and output which enable daisy-chaining up to 10 units. The universal bracket allows for numerous mounting options.

FEATURES

- ▶ Ultra High performance ultra-bright 10 W LEDs
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ RGBWA colour Spectrum for more flexible colour mixing reaching from warm, rich to solid and pastel colours
- ▶ Flicker free
- ▶ IP65 for outdoor or indoor use
- ▶ Rugged flat and compact metal housing



PHOTOMETRICAL DATA

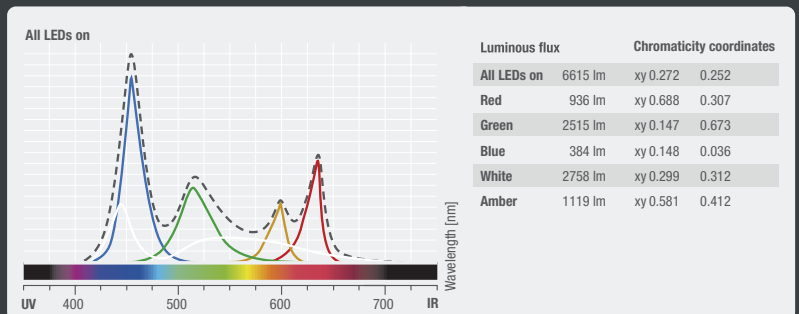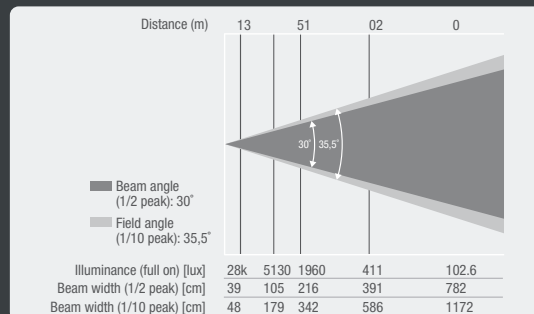

SPECIFICATIONS

Product Number:	CLPFLATPRO18IP65 / CLPFLATPRO18
Product Type:	Professional LED Lighting
Colour Spectrum:	RGBWA
Number Of LEDs:	18
LED Type:	10 W
Refresh Rate:	3,000 Hz
Dispersion:	30 °
DMX Input / Output (indoor):	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female,
DMX Input / Output (outdoor):	3-Pin Special Connector, Screwable
DMX Input / Output (outdoor):	3-Pin Special Connector, Screwable
XLR 5-Pin Female	2, 3-1, 3-2, 5, 8-Channel
DMX Functions:	Colour Fade, Colour Jump, Master Dimmer, RGBWA, Strobe

Standalone Modes:	Colour Fade, Colour Jump, Colour Macro, Slave Mode, Static Colour
Controls:	Enter, Mode, Value Up / Down
Indicators:	Backlit LCD
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	200 W
Power Connector (outdoor):	3-Pin Special Connector, Screwable
Power Connector (indoor):	Neutrik powerCON I/O
Housing Material:	Metal
Housing Colour:	Black
Cooling:	Convection
Protection Class IP:	65
Illuminance:	28000 lx @ 1 m
Luminous Flux:	6615 lm
Operating Temperature:	-5 °C - 45 °C
Dimensions (W x H x D):	280 x 280 x 160 mm
Weight:	7.5 kg



FLAT PRO 12 / IP65

12 x 10 W FLAT LED RGBWA PAR LIGHT IN BLACK HOUSING


AVAILABLE
AS **IP65** OR
INDOOR VERSION

The Cameo FLAT PRO series is a professional PAR light series for exciting, creative indoor and outdoor lighting. With a high light output and 30° beam angle the super slim fixtures are most suitable where space is limited while the convection cooling design allows a 100% Silent operation. Ultra-bright high performance 10 watt RGBWA LEDs produce a huge range of colours from soft pastel hues to rich, warm tints, and the 3,000 Hz Refresh Rate eliminates flicker. The FLAT PRO series sports a total of 5 DMX modes with multiple functions, built-in programs and an LED Display with 4 controls for easy manual operation. It also provides master, slave and standalone capability.



The IP65 versions are totally protected against dust and low pressure water jets from all directions. The purpose designed die-cast enclosure includes dedicated screw connectors for DMX signal and power input and output which enable daisy-chaining up to 10 units. The universal bracket allows for numerous mounting options.

FEATURES

- ▶ Ultra High performance ultra-bright 10 W LEDs
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ RGBWA colour Spectrum for more flexible colour mixing reaching from warm, rich to solid and pastel colours
- ▶ Flicker free
- ▶ IP65 for outdoor or indoor use
- ▶ Rugged flat and compact metal housing




PHOTOMETRICAL DATA

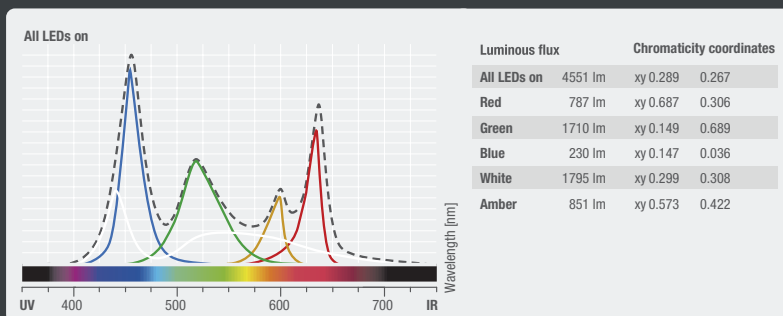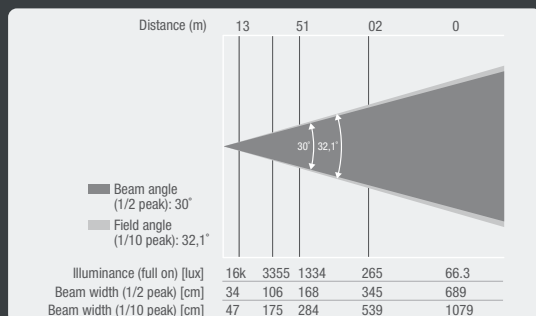

SPECIFICATIONS

Product Number:	CLPFLATPRO12IP65 / CLPFLATPRO12
Product Type:	Professional LED Lighting
Colour Spectrum:	RGBWA
Number Of LEDs:	12
LED Type:	10 W
Refresh Rate:	3,000 Hz
Dispersion:	30 °
DMX Input / Output (indoor):	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female,
DMX Input / Output (outdoor):	3-Pin Special Connector, Screwable
DMX Mode:	2, 3-1, 3-2, 5, 8-Channel
DMX Functions:	Colour Fade, Colour Jump, Master Dimmer, RGBWA, Strobe
Standalone Modes:	Colour Fade, Colour Jump, Colour Macro, Slave Mode, Static Colour

Controls:	Enter, Mode, Value Up / Down
Indicators:	Backlit LCD
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	140 W
Power Connector (outdoor):	3-Pin Special Connector, Screwable
Power Connector (indoor):	Neutrik powerCON I/O
Housing Material:	Metal
Housing Colour:	Black
Cooling:	Convection
Protection Class IP:	65
Illuminance:	16000 lx @ 1 m
Luminous Flux:	4551 lm
Operating Temperature:	-5 °C - 45 °C
Dimensions (W x H x D):	1230 x 230 x 160 mm
Weight:	6 kg

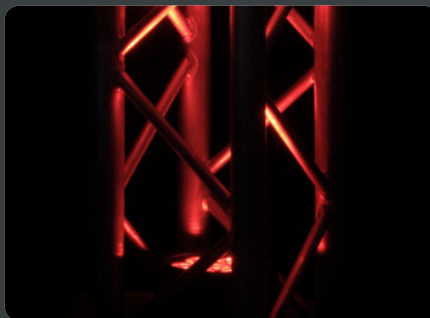

FLAT PRO 7 / IP 65

7 x 10 W FLAT LED RGBWA PAR LIGHT

AVAILABLE
AS **IP65** OR
INDOOR VERSION

The Cameo FLAT PRO series is a professional PAR light series for exciting, creative indoor and outdoor lighting. With a high light output and 30° beam angle the super slim fixtures are most suitable where space is limited while the convection cooling design allows a 100% Silent operation. Ultra-bright high performance 10 watt RGBWA LEDs produce a huge range of colours from soft pastel hues to rich, warm tints, and the 3,000 Hz Refresh Rate eliminates flicker. The FLAT PRO series sports a total of 5 DMX modes with multiple functions, built-in programs and an LED Display with 4 controls for easy manual operation. It also provides master, slave and standalone capability.



The IP65 versions are totally protected against dust and low pressure water jets from all directions. The purpose designed die-cast enclosure includes dedicated screw connectors for DMX signal and power input and output which enable daisy-chaining up to 10 units. The universal bracket allows for numerous mounting options.

FEATURES

- ▶ Ultra High performance ultra-bright 10 W LEDs
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ RGBWA colour Spectrum for more flexible colour mixing reaching from warm, rich to solid and pastel colours
- ▶ Flicker free
- ▶ IP65 for outdoor or indoor use
- ▶ Rugged flat and compact metal housing





PHOTOMETRICAL DATA

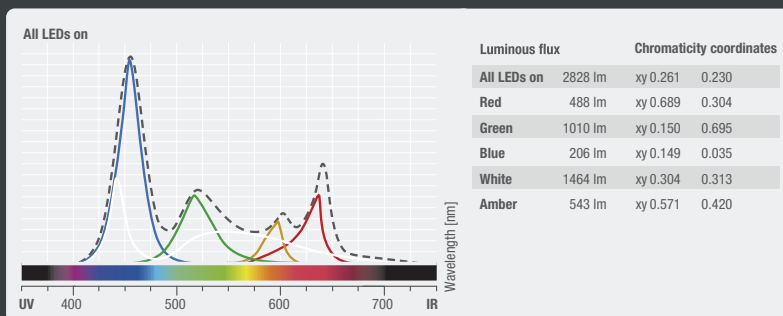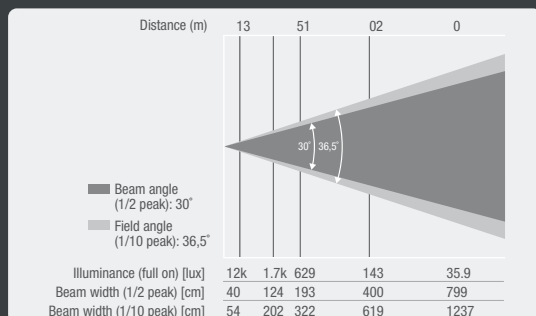

SPECIFICATIONS

Product Number:	CLPFLATPRO7IP65 / CLPFLATPRO7
Product Type:	Professional LED Lighting
Colour Spectrum:	RGBWA
Number Of LEDs:	7
LED Type:	10 W
Refresh Rate:	3,000 Hz
Dispersion:	30 °
DMX Input / Output (indoor):	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female,
DMX Input / Output (outdoor):	3-Pin Special Connector, Screwable
DMX Mode:	2, 3-1, 3-2, 5, 8-Channel
DMX Functions:	Colour Fade, Colour Jump, Master Dimmer, RGBWA, Strobe
Standalone Modes:	Colour Fade, Colour Jump, Colour Macro, Slave Mode, Static Colour

Controls:	Enter, Mode, Value Up / Down
Indicators:	Backlit LCD
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Power Connector (outdoor):	3-Pin Special Connector, Screwable
Power Connector (indoor):	Neutrik powerCON I/O
Housing Material:	Metal
Housing Colour:	Black
Cooling:	Convection
Protection Class IP:	65
Illuminance:	12000 lx @ 1 m
Luminous Flux:	2828 lm
Operating Temperature:	-5 °C - 45 °C
Dimensions (W x H x D):	180 x 180 x 160 mm
Weight:	4 kg

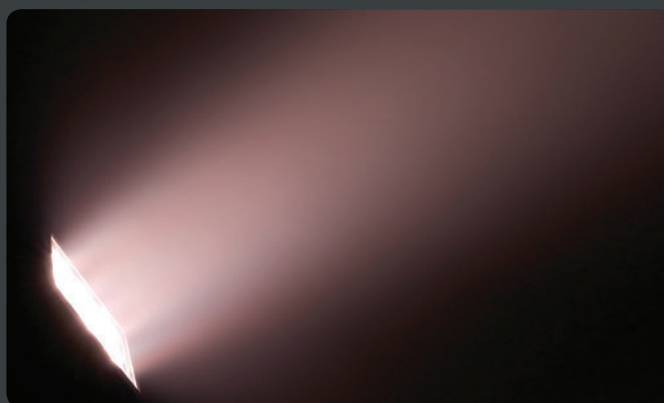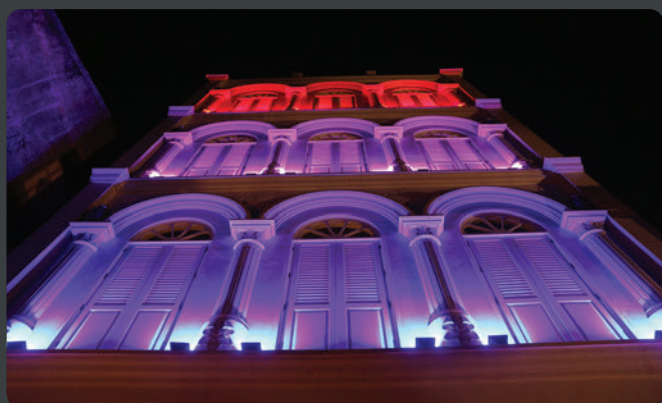

CAMEO FLAT PRO FLOOD 600 IP65

OUTDOOR FLOOD LIGHT WITH 9 x 12 W RGBWA+UV 6-IN-1 LEDS



The Cameo FLAT PRO series FLOOD 600 IP65 is a compact RDM enabled outdoor flood light equipped with nine 12 watt 6-in-1 LEDs generating rich RGBWA colours, soft pastel hues and intense UV effects. The IP65 rated fixture sports convection cooling, a 40° Beam angle and 3,000 Hz refresh rate for flicker free performance. The hardwearing metal enclosure features 3-Pin screw connectors for DMX and mains input and output plus a backlit 4-button display for easy, intuitive operation while a security lock prevents unauthorized menu access. The Cameo FLOOD 600 IP65 provides 6 modes of DMX control with dimmer and strobe functions, colour temperature correction and master, slave and standalone applications. The multi-voltage fixture operates on 100 – 240 V AC and comes with an adjustable universal bracket for floor placement and multiple mounting options. Barn doors are available as accessory.

FEATURES

- ▶ Highly flexible IP65 outdoor flood light
- ▶ Ultra flexible colour mixing with rich solid, warm pastel and UV colours
- ▶ Flicker free
- ▶ 6 modes of DMX control plus master, slave and standalone applications
- ▶ 4-button display for intuitive operation
- ▶ Security lock against unauthorized menu access
- ▶ Durable compact size metal enclosure
- ▶ Screw connectors for DMX and mains input and output
- ▶ Incl. universal bracket





PHOTOMETRICAL DATA

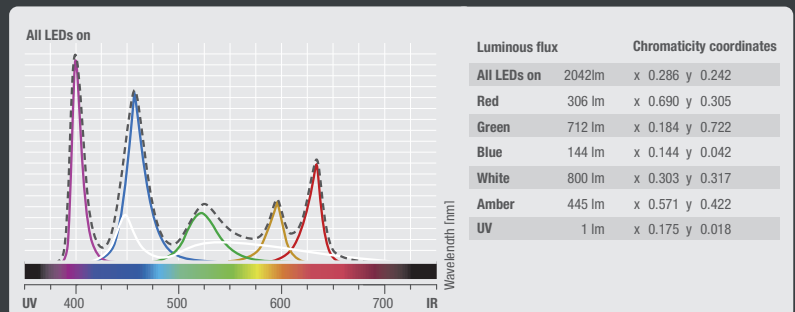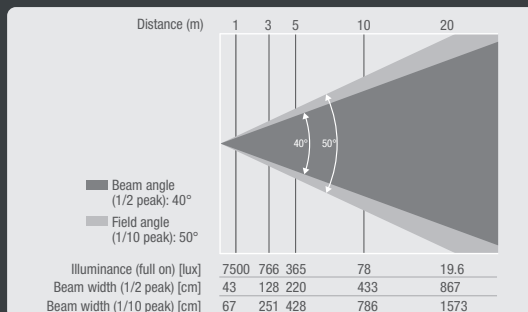

SPECIFICATIONS

Product Number:	CLFLOOD600IP65	Indicators:	Backlit LCD
Product Type:	Outdoor LED Lighting	Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Colour Spectrum:	RGBWA+UV	Power Consumption:	90 W
Number Of LEDs:	9	Power Connector:	3-Pin Special Connector, Screwable
LED Type:	12 W (ca. 50000 operating hours)	Housing Material:	Metal
Refresh Rate:	3,000 Hz	Housing Colour:	Black
Dispersion:	40°	Cooling:	Convection
DMX Input / Output:	3-Pin Special Connector, Screwable	Protection Class:	IP65
DMX Mode:	2, 3-1, 3-2, 6, 9, 11-Channel	Illuminance:	7,500 lx @ 1 m
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, Master Dimmer, RGBWA + UV, Strobe	Dimensions (W x H x D):	180 x 180 x 120 mm (Dimensions Without Mounting Bracket)
Standalone Modes:	Auto Programs, Colour Fade, Colour Jump, Colour Macro, Master / Slave Mode, Static Colour	Weight:	3.2 kg
Controls:	Enter, Mode, Value Up / Down		

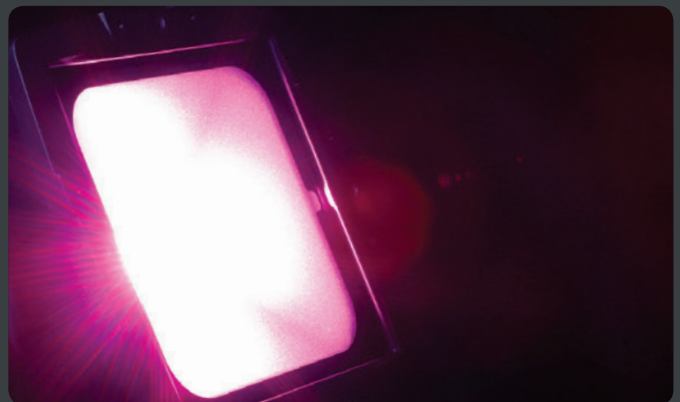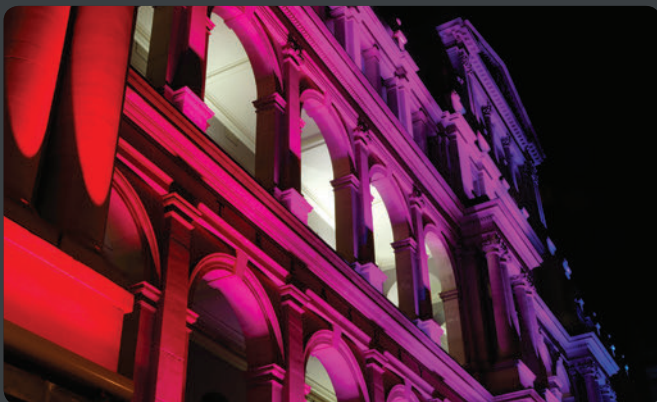

CAMEO FLAT PRO FLOOD IP65 TRI

OUTDOOR FLOOD LIGHT WITH 60 W TRI-COLOUR COB LED



The Cameo FLAT PRO series FLOOD IP65 TRI is a compact outdoor LED flood light with IP65 rating, 120° beam angle and convection cooling. A 60 watt tri-color COB LED generates rich, saturated RGB colors with a 3,000 Hz refresh rate providing flicker free performance. The black heavy-duty metal enclosure features screw connectors for DMX and mains input and output plus a backlit display with mode, enter, up and down keys for easy operation. The Cameo FLOOD IP65 TRI allows for 2-channel, 3-channel 1, 3-channel 2 and 6-channel DMX control as well as master, slave and standalone modes while a setting lock prevents unauthorized menu access. The universal bracket adds a wide variety of mounting options. Barn doors are available as accessory.

FEATURES

- ▶ 1 x 60W Tri colour COB LED
- ▶ IP65 rated for outdoor applications
- ▶ Flicker free
- ▶ 120 degrees dispersion for perfect wall-washing effects
- ▶ DMX control plus master, slave and standalone modes
- ▶ Easy to operate via mode, enter, up and down keys with backlit display
- ▶ Menu lock to prevent unauthorized access
- ▶ Compact heavy-duty metal enclosure
- ▶ Universal mounting bracket
- ▶ DMX and mains input and output on screw connectors
- ▶ Barn doors available as accessory




PHOTOMETRICAL DATA

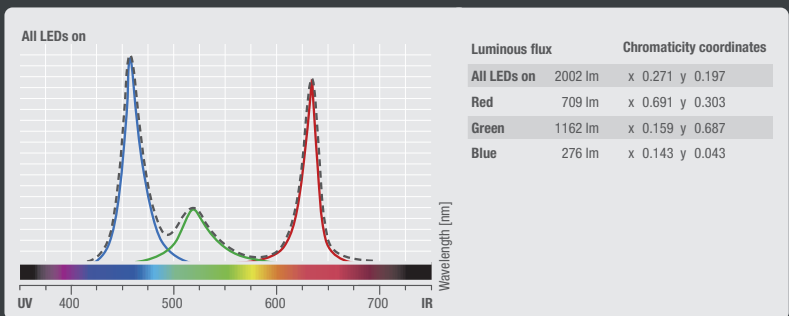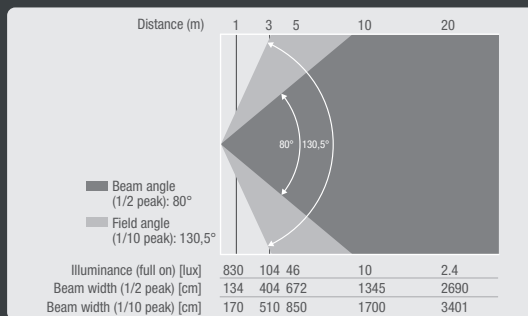

SPECIFICATIONS

Product Number:	CLFLOODI600P65
Product Type:	Outdoor LED Lighting
Colour Spectrum:	RGB
Number Of LEDs:	1
LED Type:	60 W COB TRI LED
Refresh Rate:	3,000 Hz
Dispersion:	120 °
DMX Input / Output:	3-Pin Special Connector, Screwable
DMX Mode:	2, 3-1, 3-2, 6-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, Master Dimmer, RGBWA + UV, Strobe
Standalone Modes:	Auto Programs, Colour Fade, Colour Jump, Colour Macro, Master / Slave Mode, Static Colour
Controls:	Enter, Mode, Value Up / Down

Indicators:	Backlit LCD
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	3-Pin Special Connector, Screwable
Housing Material:	Metal
Housing Colour:	Black
Cooling:	Convection
Protection Class:	IP65
Illuminance:	830 lx @ 1 m
Dimensions (W x H x D):	180 x 180 x 120 mm (Dimensions Without Mounting Bracket)
Weight:	3.2 kg

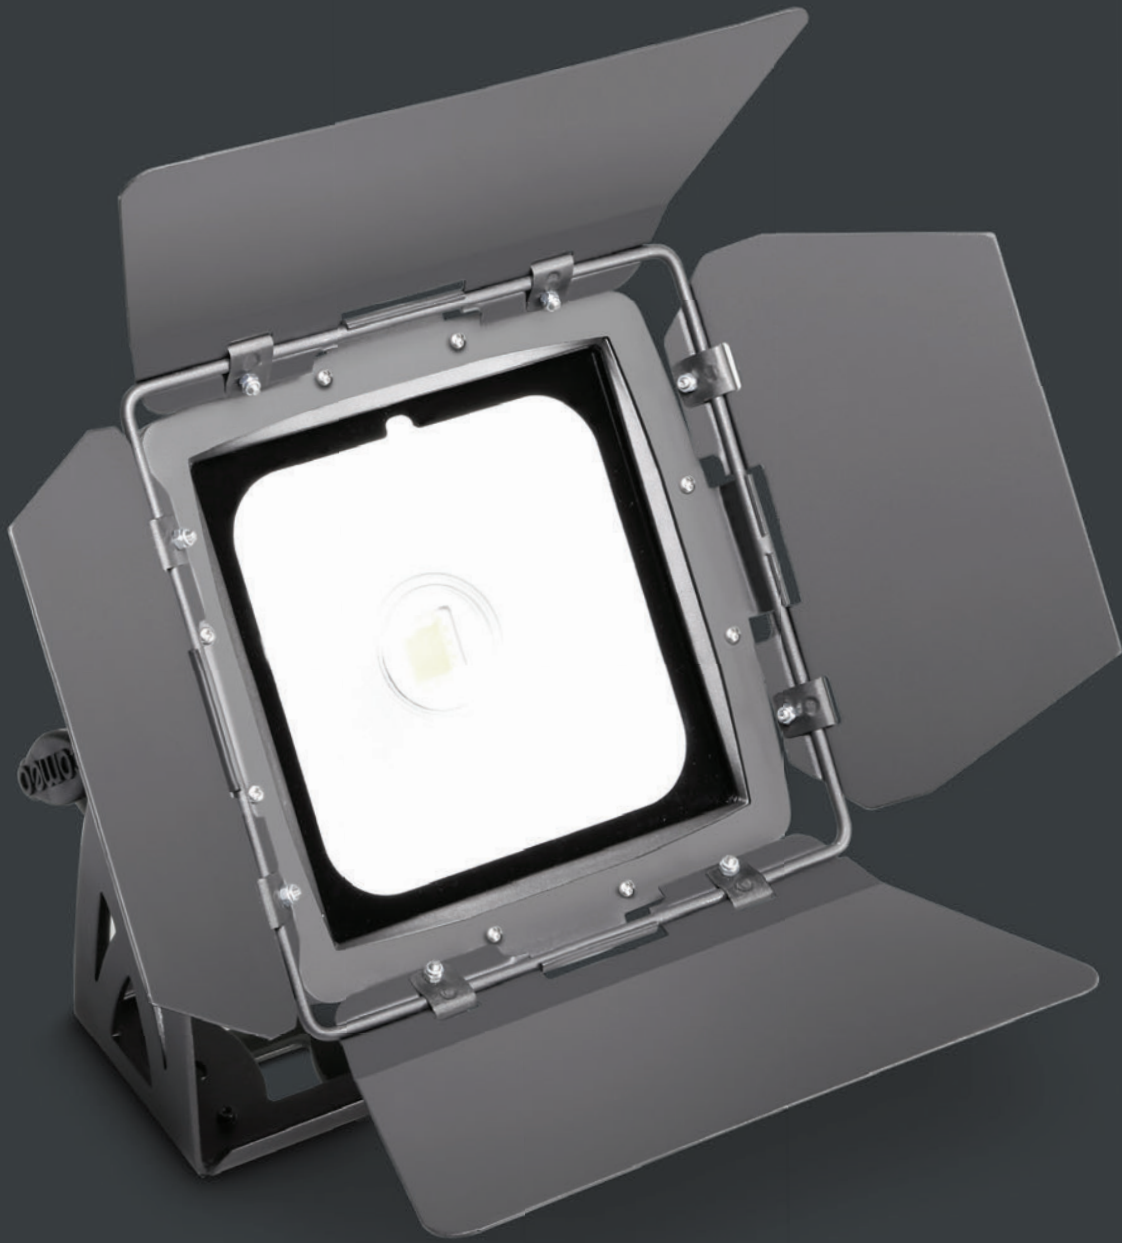



AVAILABLE ACCESSORIES


- ▶ GEARBAG 100 S - Universal Equipment Bag
 - ▶ FLAT PRO FLOOD BARN DOOR - Barn doors for CLFLOODIP65
- (see page 82 / 84 - Accessories)





FLAT PRO 7 SPOT

COMPACT, FLAT 7 x 15 WATT QUAD LED PAR SPOT

- ▶ 7 ultra bright 15 watt high performance LEDs
- ▶ Highly efficient convection cooling for noiseless operation
- ▶ RGBW for flexible colour mixes from rich solid tints to pastel hues
- ▶ 3 temperatures of white from warm to cool white
- ▶ RDM enabled
- ▶ Colour temperature correction
- ▶ 4 selectable dimming curves
- ▶ Flicker free
- ▶ Professional connectivity with 3 and 5-Pin DMX plus Neutrik powerCON inputs and outputs
- ▶ Rugged, compact metal enclosure with shallow depth

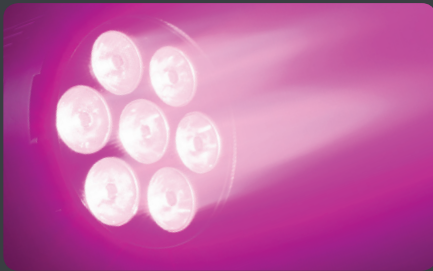

PHOTOMETRICAL DATA

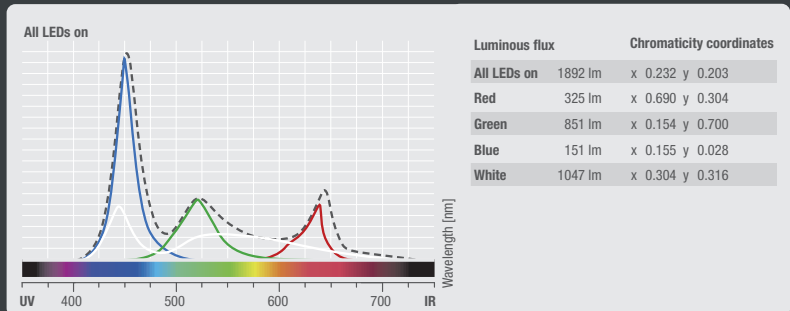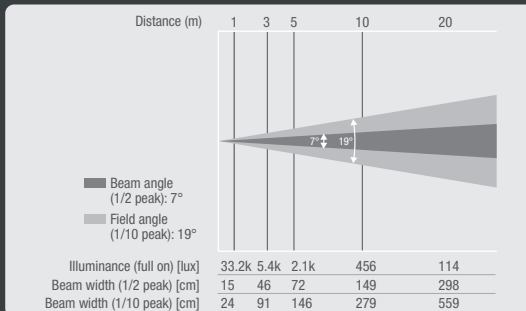

SPECIFICATIONS

Product Number:	CLPFLATPRO7SPOT
Product Type:	LED PAR Lighting
Colour Spectrum:	RGBW
Number Of LEDs:	7
LED Type:	15 W
Refresh Rate:	3,600 Hz
Dispersion:	7 °
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2, 3-1, 3-2, 4, 9, 10-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, Master Dimmer, RGBW, Sound Control, Strobe



Standalone Modes:	Colour Fade, Colour Jump, Colour Macro, Slave Mode, Sound Control, Static Colour
Controls:	Enter, Mode, Value Up / Down
Indicators:	Backlit LCD
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	Neutrik powerCON
Housing Material:	Metal
Housing Colour:	Black
Cooling:	Convection
Illuminance:	33.200 lx @ 1 m
Dimensions (W x H x D):	180 x 180 x 130 mm (Dimensions Without Mounting Bracket)
Weight:	3.5 kg





FLAT PRO 7 XS

COMPACT, FLAT 7 x 8 WATT
QUAD LED PAR LIGHT

- ▶ 7 super bright 8 W high performance LEDs
- ▶ Highly efficient convection cooling for noiseless operation
- ▶ RGBW for flexible colour mixes from rich solid tints to pastel hues
- ▶ 3 temperatures of white from warm to cool white
- ▶ RDM enabled
- ▶ Colour temperature correction
- ▶ 4 selectable dimming curves
- ▶ Flicker free
- ▶ Professional connectivity with 3 and 5-Pin DMX plus Neutrik powerCON inputs and outputs
- ▶ Rugged, compact metal enclosure with shallow depth

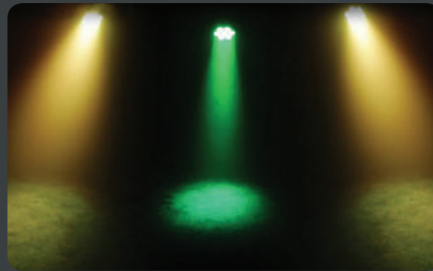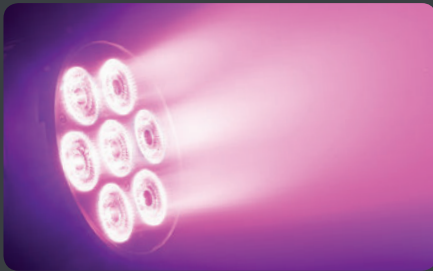

PHOTOMETRICAL DATA

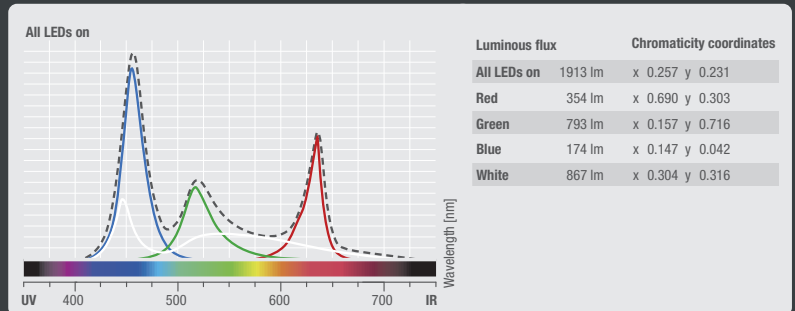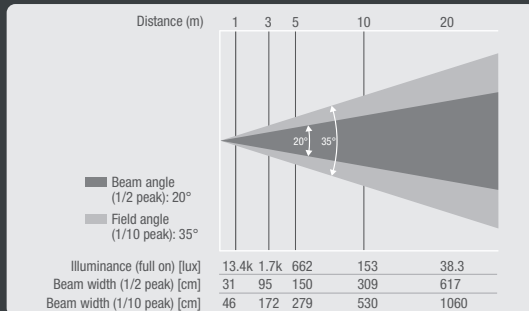

SPECIFICATIONS

Product Number:	CLPFLATPRO7XS
Product Type:	LED PAR Lighting
Colour Spectrum:	RGBW
Number Of LEDs:	7
LED Type:	8 W
Refresh Rate:	3,600 Hz
Dispersion:	20 °
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2, 3-1, 3-2, 4, 9, 10-Channel
DMX Functions:	Colour Jump, Colour Macro, Master Dimmer, RGBW, Sound Control, Strobe

Standalone Modes:	Colour Fade, Colour Jump, Colour Macro, Slave Mode, Sound Control, Static Colour
Controls:	Enter, Mode, Value Up / Down
Indicators:	Backlit LCD
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	Neutrik powerCON
Housing Material:	Metal
Housing Colour:	Black
Cooling:	Convection
Illuminance:	13,400 lx @ 1 m
Dimensions (W x H x D):	180 x 180 x 130 mm (Dimensions Without Mounting Bracket)
Weight:	3.5 kg





PIXBAR SERIES

With the PixBar Series Cameo presents a range of professional, flicker free LED washers sporting a host of advanced features. Housed in rugged aluminium enclosures with 3 and 5-pin DMX and Neutrik powerCON connectors they are fully RDM compatible, and their single pixel control facility allows for amazing chase effects. Integrating sophisticated autorun software, the PixBars provide standalone, master and slave capability as well as 6 mode DMX control while convection cooling ensures absolutely noiseless operation. Additional features are color temperature correction, 4 dimming curve presets and a substantial stand that doubles as mounting bracket. Available in a variety of versions with 3 to 30 watt LEDs Cameo Pixbars are an attractive choice for highly effective and truly professional lighting design.





PIXBAR 600 PRO IP65

RDM ENABLED 12 x 12 W RGBWA+UV
OUTDOOR LED BAR

AVAILABLE
AS **IP65** OR
INDOOR VERSION

Featuring 12 ultra bright 12 watt 6-in-1 LEDs and 22° beam width the Cameo PixBar 600 PRO IP65 creates impressive RGBWA+UV washes. Highly efficient convection cooling ensures noiseless performance, and with a 3,600 Hz refresh rate the IP65 rated outdoor fixture is flicker-free and suitable for TV and motion picture applications. The wash light comes with 2 diffusers to change beam and field angles from 22° and 72° to 52° and 92° while providing smooth lighting with minimum dazzle. The PixBar 600 PRO IP65 is RDM enabled allowing bi-directional communication with a dedicated controller for addressing, configuration and status reporting. It provides 7 modes of DMX control and sports 14 automated lightshows, 4 selectable dimming curves, a strobe function and standalone, master or slave capability. The fixture includes single pixel control, color temperature correction and macros calibrated to the LEE filters standard for additional effects and flexibility. The rugged aluminium enclosure features a backlit 4-button display with security lock to prevent unauthorized menu access, Neutrik X-HD series 5-pin DMX inputs and outputs and powerCON TRUE1 mains connectors.



FEATURES

- ▶ 12 ultra-bright 12 W RGBWA+UV LEDs
- ▶ IP65 classification for outdoor use
- ▶ Absolutely noiseless and flicker-free operation
- ▶ 7 DMX modes plus operation as a standalone, master or slave
- ▶ RDM enabled
- ▶ Bold primary colours, pastel and UV tones
- ▶ Colour macros that are adjusted for LEE filters
- ▶ Single pixel control for effective Chase effects
- ▶ Colour temperature correction
- ▶ 4 dimmer curves
- ▶ Neutrik powerCON TRUE1 and 5-Pin X-HD power and DMX sockets
- ▶ Two diffusion filters and one lens hood included





PHOTOMETRICAL DATA

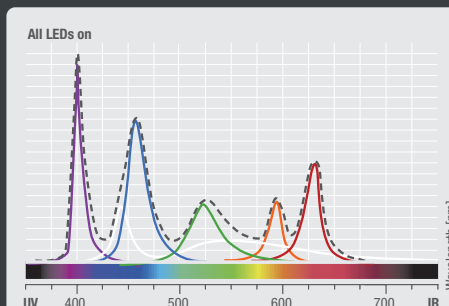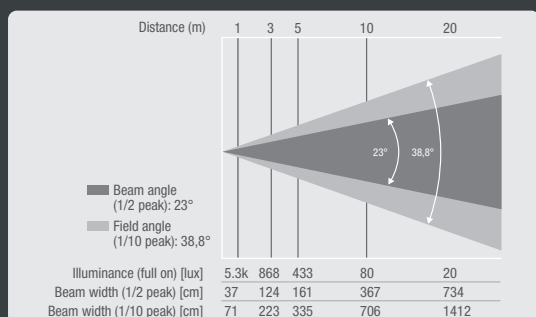

	Luminous flux	Chromaticity coordinates
All LEDs on	2684 lm	x 0.273 y 0.250
Red	388 lm	x 0.687 y 0.305
Green	1105 lm	x 0.181 y 0.720
Blue	185 lm	x 0.144 y 0.041
White	1140 lm	x 0.305 y 0.315
Amber	526 lm	x 0.574 y 0.418
UV	5 lm	x 0.176 y 0.028

SPECIFICATIONS

Product Number: CLPIXBAR600PROIP65

Product Type: Outdoor LED Bars

Colour Spectrum: RGBWA+UV

Number Of LEDs: 12

LED Type: 12 W 6 In 1 Colour

Refresh Rate: 3,600 Hz

Dispersion: 22°, 52°

DMX Input / Output: 5-Pin Neutrik X-HD

DMX Mode: 2, 6-1, 6-2, 8, 12, 74, 78-Channel

DMX Functions: 14 Auto Modes, Colour Fade, Colour Jump, Colour Macro, Colour Temperature Correction, Dimmer, Single pixel control, Strobe

Standalone Modes: 14 Auto Modes, Static Colour, Strobe

Controls: Enter, Mode, Value Up / Down

Indicators: Backlit LCD

Power Supply: 110 V AC - 240 V AC / 50 – 60 Hz

Power Consumption: 160 W

Power Connector: Neutrik powerCON TRUE1 IN (NAC3FX-W) / OUT (NACMFX-W)

Housing Material: Die-Cast Aluminium

Housing Colour: Black

Cooling: Convection

Protection Class: IP65

Illuminance: 5,300 lx @ 1 m

Operating Temperature: -15 - 45 °C

Dimensions (W x H x D): 854 x 130 x 90 mm (Dimensions Without Mounting Bracket)

Weight: 6.2 kg

AVAILABLE ACCESSORIES


► CAMEO GEARBAG 400 S ► OMEGA BRACKET SET (see page 82 / 84 - Accessories)





PIXBAR 650 CPRO

PROFESSIONAL 8 x 30 W
COB LED BAR

- ▶ 8 ultra bright 30 W COB LEDs
- ▶ LED Single pixel control for stunning chase and pixel mapping effects
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ Flicker free
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O
- ▶ RDM enabled
- ▶ 5-mode DMX control plus standalone operation with master and slave modes
- ▶ 4 selectable dimming curves
- ▶ Colour temperature correction

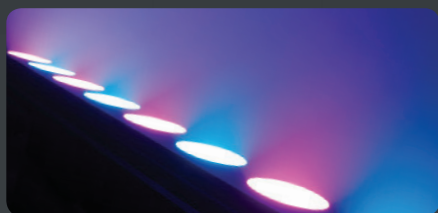

PHOTOMETRICAL DATA

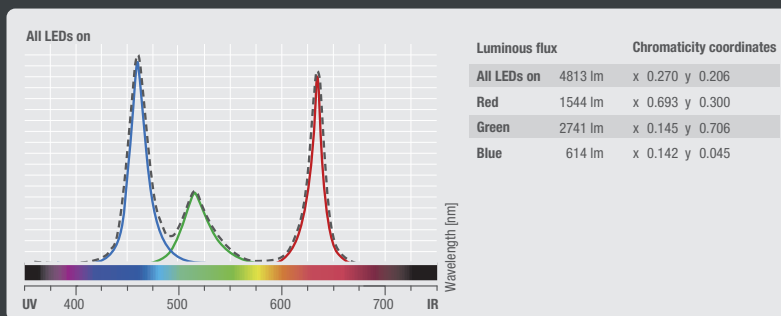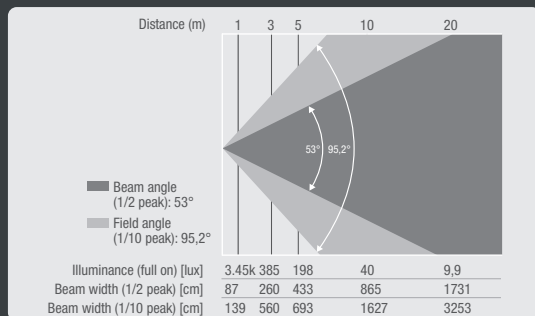

SPECIFICATIONS

Product Number:	CLPIXBAR650CPRO
Product Type:	LED Bars
Colour Spectrum:	RGB
Number Of LEDs:	8
LED Type:	30 W COB
Refresh Rate:	3,000 Hz
Dispersion:	53 °
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2, 3-1, 3-2, 9, 26, 30-Channel
DMX Functions:	Auto Programs, Colour Macro, Colour Temperature Correction, Dimmer, Single pixel control, Sound Programs, Strobe
Standalone Modes:	Auto Programs, Auto Run, Sound Programs, Static Colour, Strobe

Controls:	Enter, Mode, Value Up / Down
Indicators:	LC Display
Power Supply:	110 V AC - 240 V AC / 50 - 60 Hz
Power Consumption:	250 W
Power Connector:	Neutrik powerCON
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black
Cooling:	Convection
Illuminance:	3450 lx @ 1 m
Dimensions (W x H x D):	880 x 110 x 130 mm (Dimensions Without Mounting Bracket)
Dimensions Of The Mounting Bracket:	495 x 140 x 100 mm (Incl. Rubber Feet)
Weight:	7.6 kg

AVAILABLE ACCESSORIES


- ▶ CAMEO GEARBAG 400 S (see page 82 - Accessories)





PIXBAR 400 PRO

PROFESSIONAL 12 x 8 W
RGBW LED BAR

- ▶ 12 ultra bright 8 W Quad-LEDs
- ▶ LED Single pixel control for stunning chase and pixel mapping effects
- ▶ Absolutely silent operation due to efficient convection cooling
- ▶ Flicker free
- ▶ Professional connectivity with 3 and 5-pin DMX and Neutrik powerCON I/O
- ▶ RDM enabled
- ▶ 7-mode DMX control plus standalone operation with master and slave modes
- ▶ Diffusion lens included for a smooth wash with minimum dazzle
- ▶ 4 selectable dimming curves

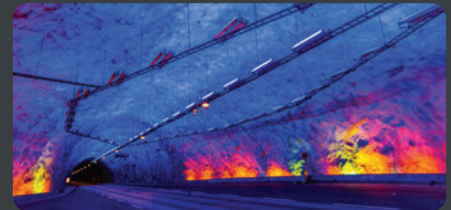

PHOTOMETRICAL DATA

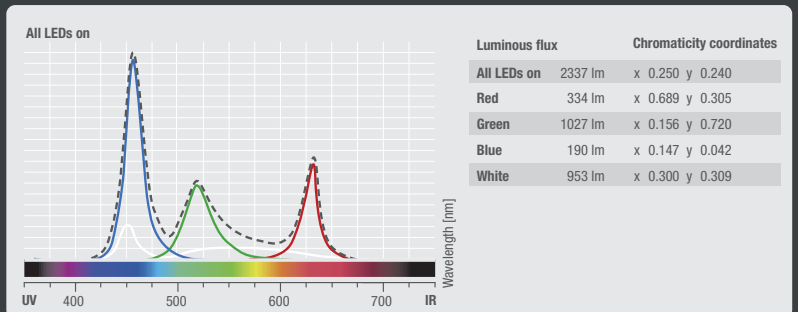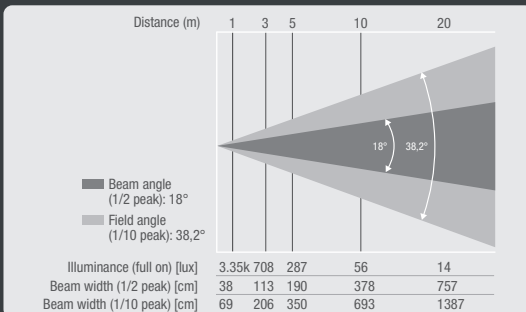

SPECIFICATIONS

Product Number:	CLPIXBAR400PRO
Product Type:	LED Bars
Colour Spectrum:	RGBW
Number Of LEDs:	12
LED Type:	8 W QUAD Colour
Refresh Rate:	3,000 Hz
Dispersion:	18 °
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2, 4-1, 4-2, 6, 10, 50, 54-Channel
DMX Functions:	Auto Programs, Colour Macro, Colour Temperature Correction, Dimmer, Single pixel control, Sound Programs, Strobe
Standalone Modes:	Auto Programs, Sound Programs, Static Colour, Strobe

Controls:	Enter, Mode, Value Up / Down
Indicators:	LC Display
Power Supply:	110 V AC - 240 V AC / 50 – 60 Hz
Power Consumption:	90 W
Power Connector:	Neutrik powerCON
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black
Cooling:	Convection
Illuminance:	3350 lx @ 1 m
Dimensions (W x H x D):	900 x 117 x 70 mm (Dimensions Without Mounting Bracket)
Dimensions Of The Mounting Bracket:	495 x 140 x 100 mm (Incl. Rubber Feet)
Weight:	6 kg

AVAILABLE ACCESSORIES


- ▶ CAMEO GEARBAG 400 S (see page 82 - Accessories)





PIXBAR 500 PRO

PROFESSIONAL 6 x 12 W RGBWA+UV LED BAR

- ▶ 6 ultra-bright 12 W RGBWA+UV LEDs
- ▶ Single pixel control for effective chase effects
- ▶ Silent operation thanks to convection cooling
- ▶ Flicker-free
- ▶ Professional 3- and 5-pin DMX sockets and Neutrik powerCon mains connector
- ▶ Fully RDM-enabled
- ▶ 7 DMX modes plus operation as a standalone, master or slave
- ▶ Frost filter for uniform, glare-free light
- ▶ 4 adjustable dimmer curves
- ▶ Colour temperature correction
- ▶ 3 preset shades of white: warm white, cool white, white
- ▶ Sturdy aluminium housing

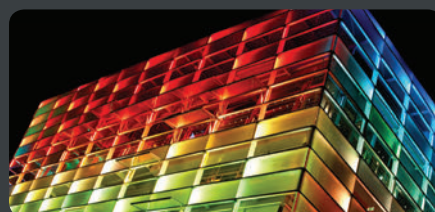

PHOTOMETRICAL DATA

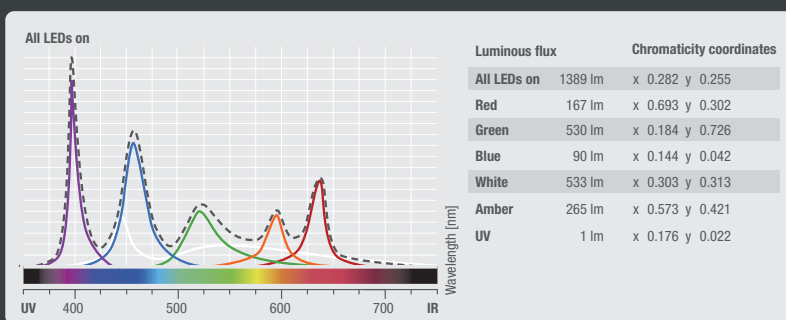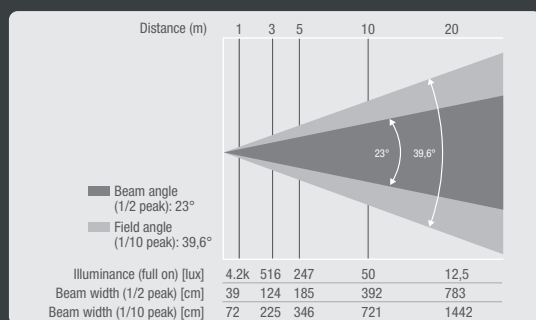

SPECIFICATIONS

Product Number:	CLPIXBAR500PRO
Product Type:	LED Bars
Colour Spectrum:	RGBWA+UV
Number Of LEDs:	6
LED Type:	12 W
Refresh Rate:	3,000 Hz
Dispersion:	23 °
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2, 6-1, 6-2, 8, 12, 38, 42-Channel
DMX Functions:	Auto programs, Colour macro, Colour Temperature correction, Dimmer, Single pixel control, Sound programs, Strobe
Standalone Modes:	Auto programs, Auto run, Sound programs, Static colour, Strobe

Controls:	Enter, Mode, Value up / down
Indicators:	LC Display
Power Supply:	110 V AC - 240 V AC / 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	Neutrik powerCON
Housing Material:	Die-cast aluminium
Housing Colour:	Black
Cooling:	Convection
Illuminance:	1190lx @ 1m
Dimensions (W x H x D):	450 x 120 x 75 mm (Dimensions without mounting bracket)
Dimensions Bracket:	380 x 140 x 100 mm (Incl. rubber feet)
Weight:	4 kg

AVAILABLE ACCESSORIES


- ▶ CAMEO GEARBAG 400 S (see page 82 - Accessories)





PIXBAR 600 PRO

PROFESSIONAL 12 x 12 W
RGBWA+UV LED BAR

- ▶ 12 ultra-bright 12 W RGBWA+UV LEDs
- ▶ Single pixel control for effective chase effects
- ▶ Silent operation thanks to convection cooling
- ▶ Flicker-free
- ▶ Professional 3- and 5-pin DMX sockets and Neutrik powerCon mains connector
- ▶ Fully RDM-enabled
- ▶ 7 DMX modes plus operation as a standalone, master or slave
- ▶ Diffusing lens for uniform, glare-free light
- ▶ 4 adjustable dimmer curves
- ▶ Colour temperature correction
- ▶ 3 preset shades of white: warm white, cool white, white
- ▶ Sturdy aluminium housing



PHOTOMETRICAL DATA

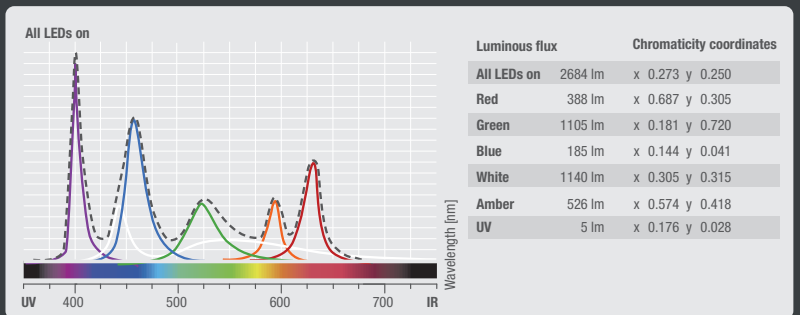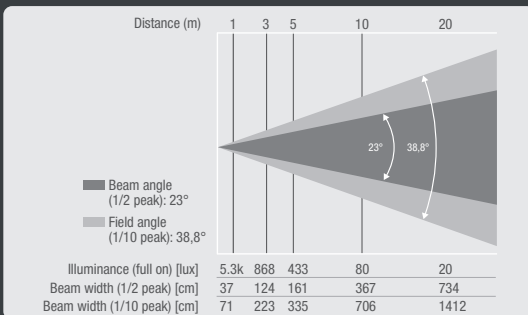

SPECIFICATIONS

Product Number:	CLPIXBAR600PRO
Product Type:	LED Bars
Colour Spectrum:	RGBW
Number Of LEDs:	12
LED Type:	12 W
Refresh Rate:	3,000 Hz
Dispersion:	23 °
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2, 6-1, 6-2, 8, 12, 74, 78-Channel
DMX Functions:	Auto programs, Colour macro, Colour temperature Correction, Dimmer, Single pixel control, Strobe
Standalone Modes:	Auto programs, Static colour, Strobe

Controls:	Enter, Mode, Value up / down
Indicators:	LC Display
Power Supply:	110 V AC - 240 V AC / 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	Neutrik powerCON
Housing Material:	Die-Cast Aluminium
Housing Colour:	Black
Cooling:	Convection
Illuminance:	5300 lx @ 1 m
Dimensions (W x H x D):	900 x 120 x 75 mm (Dimensions without mounting bracket)
Dimensions Bracket:	495 x 140 x 100 mm (Incl. rubber feet)
Weight:	6 kg

AVAILABLE ACCESSORIES

▶ CAMEO GEARBAG 400 S (see page 82 - Accessories)



HOT NOZZLE!
KEEP AT LEAST 50 CM DISTANCE

ONLY USE CAMEO
INSTANT MAZE FLUID

ER 1400 PRO



INSTANT SERIES

Featuring precision adjustment, DMX control and whisper-quiet operation Cameo Instant Series haze and wind machines create awesome effects at shows, events, in discotheques and TV, motion picture and theatre productions. With huge output capacity, extremely short pre-heating time, continuous haze without re-heating intervals and microprocessor control, Cameo hazers are a great choice to enhance moving light shows. Self-cleaning long-life vapor tubes minimize maintenance, and our specially formulated Instant Haze Fluid provides long hang time and excellent reflection. The Cameo Instant Air 1000 is the ideal addition to fog, smoke and haze systems generating heavy gusts of wind, just a breeze or anything in between.



Fluid is not included



INSTANT HAZER 1500 T PRO

TOURING HAZER WITH MICROPROCESSOR CONTROL

CLFIH5L
SPECIAL OIL FREE FLUID
FOR CAMEO INSTANT
HAZE MACHINES



Ready for the road, the Instant Series Hazer 1500 T Pro comes in a tough and durable touring case. With a huge output capacity of 1020 m³ per minute, extremely short pre-heating time of 45 seconds only and whisper-quiet operation it is ideal for portable applications in TV and motion picture productions, fashion shows, live events and mobile discotheques. The highly efficient, microprocessor-controlled haze machine features a long-life vapor tube of grade 316 stainless steel and automatic self-cleaning mechanism to prevent residue build-up and minimize maintenance. The unit's haze emission and projection fan speed are individually variable in 1% increments to suit stages and venues of any size, fluid consumption at 100% output is a low 17 ml per minute. The Hazer 1500 T Pro is capable of 2-Channel DMX control and standalone operation providing 3-Pin and 5-Pin XLR inputs and outputs for the DMX signal. The rugged construction sports a 3-Segment LED display, a fluid drawer for canisters up to 5 liters and overheating protection. Producing a very fine, long-lasting mist the Cameo Hazer 1500 T Pro is the perfect choice to enhance moving light shows for impressive atmospheric effects. For best results, use only Cameo Instant Haze Fluid, which is specially designed for Cameo Hazer. Using other fluids will void the warranty and can damage the device.

FEATURES

- ▶ Powerful 1,500 watt microprocessor-controlled touring haze machine
- ▶ Rugged road case
- ▶ 1020 m³ output capacity per minute
- ▶ Extended-life stainless steel vapor tube
- ▶ Automatic self-cleaning mechanism
- ▶ Haze emission and fan speed individually adjustable in 100 increments
- ▶ 2-Channel DMX control and standalone functionality
- ▶ Integrated fluid canister drawer
- ▶ Whisper-quiet operation
- ▶ Ideal for TV, motion pictures, theaters, discotheques and live events
- ▶ Enhances any light show



SPECIFICATIONS

Product Number:	CLIH1500TPRO
Product Type:	Hazer
Power:	1500 W
Max. Output:	1020 m ³ /min
Warm-Up Time:	45 sec.
Fluid Consumption:	17 ml/ min (100% Output)
DMX Input / Output:	XLR 3-Pin Male , XLR 5-Pin Male / XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	2-Channel
DMX Functions:	Fan, Vapour Volume
Standalone Modes:	Fan, Vapour Volume

Controls:	Start / Stop / Mode, Value Up / Down
Indicators:	3-Segment LED Display
Power Supply:	240 V AC, 50 Hz
Power Consumption:	1500 W
Overheating Protection:	Heating Element With Thermostat
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Cabinet Colour:	Black
Recommended Fluid:	INSTANT Haze (Not Included)
Dimensions (W x H x D):	415 x 266 x 555 mm
Weight:	25 kg



Fluid is not included



INSTANT HAZER 1400 PRO

HAZER WITH MICROPROCESSOR CONTROL

CLFIH5L
SPECIAL OIL FREE FLUID
FOR CAMEO INSTANT
HAZE MACHINES



With a maximum output volume of 991 m³ per minute, an extremely short warm-up time of only 45 seconds and whisper-quiet operation, the Instant Hazer 1400 Pro from Cameo's Instant series is perfect for discos, live events, theatres, TV and film. The highly efficient micro-processor-controlled hazer features a durable evaporation tube made of austenitic stainless steel and automatic self-cleaning to prevent clogging and minimise maintenance. Haze output is consistent without additional heating and – like the fan speed – is adjustable in 1% increments for stages and rooms of any size. At full output, fluid consumption is only 17 ml per minute. The Instant Hazer 1400 Pro can be controlled via DMX in 2-channel mode and can also be used stand-alone. It is equipped with 3-pin and 5-pin DMX inputs and outputs. The robust construction features a 3-digit LED display, a slot for fluid canisters up to 5 litres and is protected against overheating. The Cameo Instant Hazer 1400 Pro generates a very fine, long-lasting haze to enhance any light show with effective, atmospheric effects. For best results, use only Cameo Instant Haze fluid, which has been developed specifically for Cameo hazers. Use of other fluids will void the warranty and may damage the device.

FEATURES

- ▶ Microprocessor controlled 1400 Watt Hazer
- ▶ Max. output volume 991 m³ per minute
- ▶ Long-lasting evaporation tube made of stainless steel 316
- ▶ Automatic self-cleaning
- ▶ Output and fan individually adjustable in 100 increments
- ▶ 2-Channel DMX control and standalone mode
- ▶ Built-in insert for fluid canisters up to 5 L
- ▶ Whisper-quiet operation
- ▶ Ideal for TV, film, theatre, discos and live events
- ▶ Enriches the effect of any light show



SPECIFICATIONS

Product Number:	CLIH1400PRO	Controls:	Start / Stop / Mode, Value Up / Down
Product Type:	Hazer	Indicators:	3-Segment LED Display
Power:	1400 W	Power Supply:	240 V AC, 50 Hz
Max. Output:	991 m ³ /min	Power Consumption:	1500 W
Warm-Up Time:	45 sec.	Overheating Protection:	Heating Element With Thermostat
Fluid Consumption:	17 ml/min (100% Output)	Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male/ XLR 3-Pin Female, XLR 5-Pin Female	Cabinet Colour:	Black
DMX Mode:	2-Channel	Recommended Fluid:	INSTANT Haze (not included)
DMX Functions:	Fan, Vapour Volume	Dimensions (W x H x D):	345 x 300 x 365 mm
Standalone Modes:	Fan, Vapour Volume	Weight:	20.1 kg



INSTANT AIR 1000 PRO

WIND MACHINE WITH VARIABLE POWER AND DIRECTIVITY

The Instant Air 1000 Pro from the Cameo Instant series is a highly efficient wind machine for use in theatres, on catwalks, in films, clubs, discos, theme parks and live concerts. Thanks to a maximum air flow of 56 m³ per minute and a precise fan strength adjustable in one percent increments, it produces numerous effects from light breeze up to forceful gusts of wind. The output angle can be infinitely adjusted up to 180°, thus allowing a precise jet of air or a wide diffusion with a range of up to 21 m. The Instant Air 1000 Pro can be controlled via DMX, as a standalone device and is operated with a comfortable RF remote control. It features 3-Pin and 5-Pin DMX inputs and outputs, a clear LED display and an extremely low-noise fan motor for whisper-quiet operation. The Cameo Air 1000 Pro is designed for floor and truss mounting and can be used by itself or as an ideal complement to fog machines.

FEATURES


- ▶ Powerful professional wind machine
- ▶ Max. air flow 56 m³ per minute
- ▶ Ultra-quiet 31 cm fan
- ▶ Adjustable in 1% increments from 1 - 100
- ▶ Infinitely adjustable output aperture up to 180°
- ▶ DMX control
- ▶ RF remote control included
- ▶ Floor or truss mounting



SPECIFICATIONS

Product Number:	CLIA1000PRO
Product Type:	Wind machine
Max. Air Flow:	56 m ³ /min
Max. Distance:	21 m
Noise:	45 db - 51 db
Fan Diameter:	310
DMX Input / Output:	XLR 3-Pin Male, XLR 5-Pin Male/ XLR 3-Pin Female, XLR 5-Pin Female
DMX Mode:	1-Channel

DMX Functions:	Fan speed
Standalone Modes:	Fan speed
Indicators:	3-Segment LED display
Power Supply:	240 V AC, 50 Hz
Power Consumption:	75 W
Overheating Protection:	Heating element with thermostat
Power Connector:	Power cord with safety plug (Type E / CEE 7/7)
Cabinet Colour:	Black
Dimensions (W x H x D):	385 x 385 x 515 mm
Weight:	10.9 kg

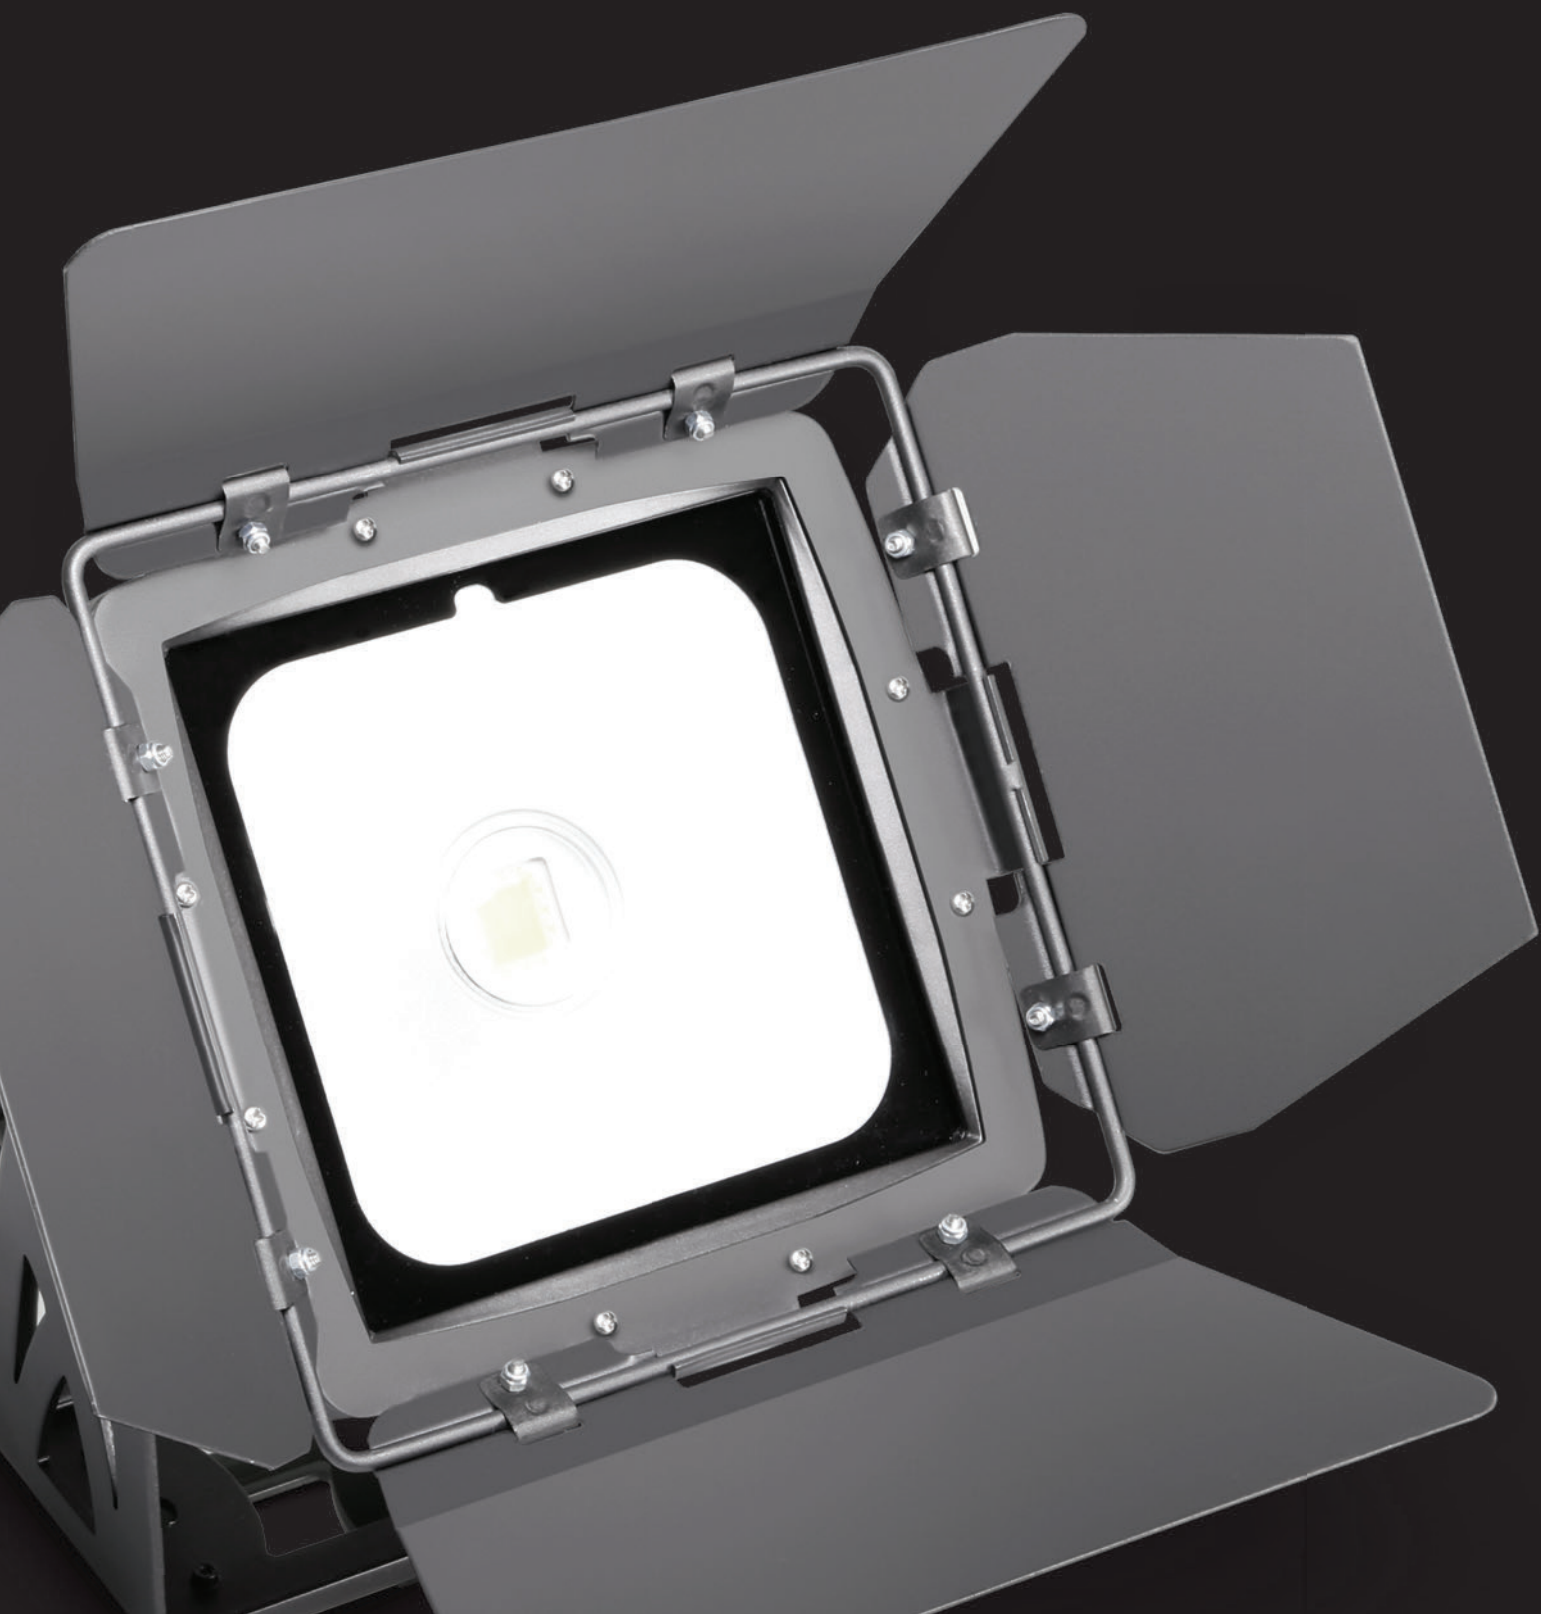

ACCESSORIES

With a selection of rugged, high-quality gear bags for convenient transport, special flightcase with battery charging feature, diffuser filters and barn doors Cameo covers your needs for professional lighting accessories.



AS 4 INSERT

FOAM INSERT FOR AURO SPOT 400

Product Number:	CLAS4INSERT
Product Type:	Flightcase Accessories
Colour:	Black
Material:	Integral Soft Foam
Required Lid Height:	Min. 11 cm
Dimensions (W x H x D):	470 x 310 x 485 mm
Weight:	5.5 kg



GEARBAG 100 S

UNIVERSAL EQUIPMENT BAG 230 X 230 X 310 MM

Product Number:	CGB100S
Product Type:	Other Lighting Accessories
Colour:	grey
Material:	Nylon 1680D
Thickness of the padding:	10 mm
Latch:	With Zipper
Dimensions (W x H x D):	230 x 230 x 310 mm
Weight:	1,67 kg



ZENIT® B60 CASE

CHARGING FLIGHT CASE FOR 6 ZENIT B60

Product Number:	CLZB60CASE6PC
Product Type:	LED PAR Lighting Accessories
Material:	Birch Multiplex
Material Thickness:	7 mm
Colour:	Black
Latch:	Butterfly Latches
Interior construction:	Firmly Installed Power Cabling, Foam
Components:	2 x 100 mm Directional Self-Setting Castor, 2 x 100 mm Directional Self-Setting Castor With Brake, 2 x Butterfly Medium, 4 x Ball Corner Medium, 4 x Ball Corner Medium With Integrated Corner Brace, 4 x Castor Dish, 8 x Fold-Down Handle, Aluminium Case Angle 30 x 30 mm, Dish Black For 2 XLR Sockets, Tour Label Self-Adhesive, Tour Label Dish
Material:	Birch Multiplex



GEARBAG S400 S

UNIVERSAL EQUIPMENT BAG 1120 x 180 x 115 mm


Product Number:	CGB400S
Product Type:	Other Lighting Accessories
Colour:	Grey
Material:	Nylon 1680D
Thickness of padding:	10 mm
Latch:	With Zipper
Dimensions (W x H x D):	1120 x 180 x 115 mm
Weight:	2 kg



ZENIT® LSD 6010

ELLIPTICAL LIGHT SHAPING DIFFUSER 60° x 10°
FOR ZENIT B 60, ZENIT P 40 AND ZENIT P 130


Product Number: CLZPLSD6010
Product Type: LED PAR Lighting Accessories
Weight: 0.1 kg

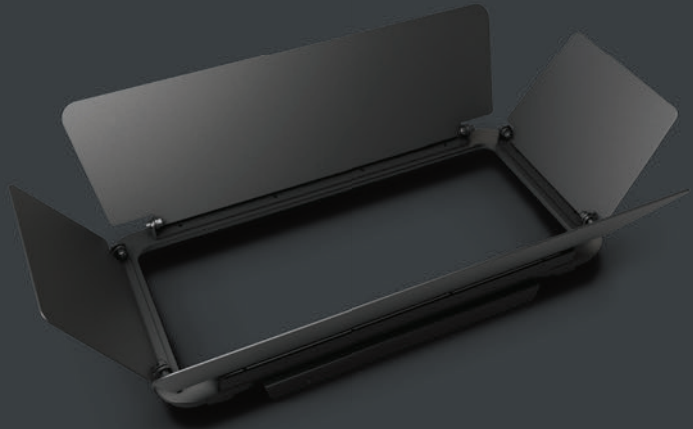

ZENIT® W 600 4 B

4-WAY BARNDOOR FOR ZENIT® W600
FOR ZENIT W 600


Product Number: CLZW6004B
Product Type: LED PAR Lighting Accessories
Weight: 0.84 kg

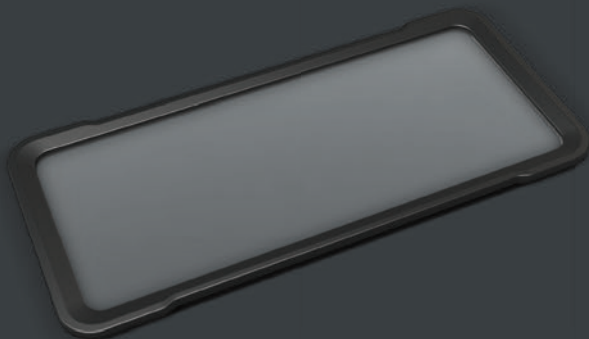

ZENIT® W 600 SM LSD 6010

SNAPMAG® FILTER 60°X10°
FOR ZENIT W 600


Product Number: CLZW600SMLSD6010
Product Type: LED PAR Lighting Accessories
Weight: 0.1 kg

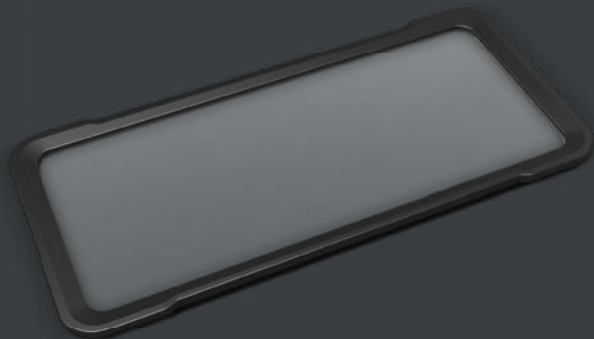

ZENIT® W 600 SM LSD 20 / 40 / 100

SNAPMAG® FILTER 25° / 45° / 100°
FOR ZENIT W 600


Product Number: CLZW600SMLSD20 / CLZW600SMLSD40 / CLZW600SMLSD100
Product Type: LED PAR Lighting Accessories
Weight: 0.1 kg

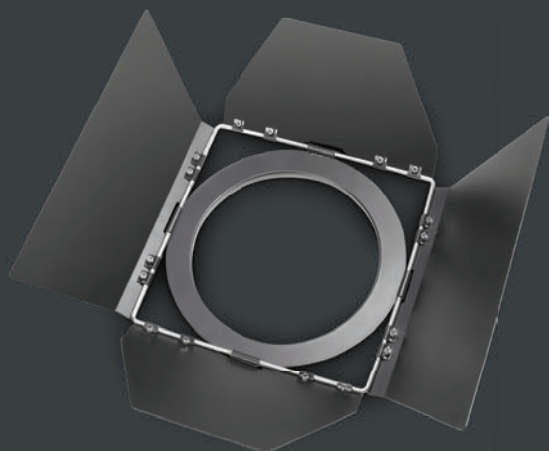

ZENIT® 120 BARN DOOR

BARN DOORS FOR ZENIT Z 120

Product Number:	CLZZ120BARND00R
Product Type:	LED PAR Lighting Accessories
Colour:	Black
Weight:	1.5 kg

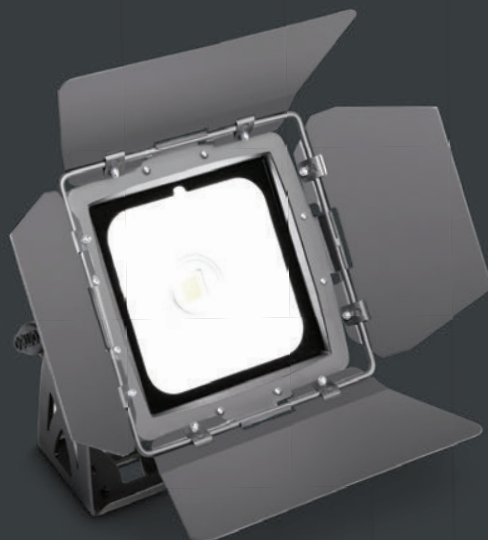

FLAT PRO FLOOD BARN DOOR

BARN DOORS FOR CLFLOODIP65

Product Number:	CLFLATBARND00R
Product Type:	LED PAR Lighting Accessories
Colour:	Black
Weight:	0,5 kg



PIXBAR 600 IP 65 BSET

OMEGA BRACKET SET FOR PIXBAR 600 PRO IP65

Product Number:	CLPIXBAR600IP65BSET
Product Type:	LED Bars
Colour:	Black
Weight:	0,6 kg



Design by
**PORSCHE DESIGN
STUDIO**

Monumental Clarity

MAUI® P900

A GROUND-BREAKING VISION IN PRO AUDIO

Imagine a modern art audio system. Imagine a pure design, pristine sound clarity and monumental power. Creating the MAUI P900, we set out to combine state-of-the-art audio technology and sleek

elegance into a loudspeaker system that breaks new ground. Merging inspired aesthetics with technical excellence, the MAUI P900 is a vision come true.



» Expand your horizon at:
LD-SYSTEMS.COM/MAUIP900

LD PRO AUDIO
SYSTEMS IN MOTION

LD Systems® is a brand of the Adam Hall Group.



Tri-Colour RGB LEDs

Also called 3-in-1, RGB LEDs have red, green and blue emitters to produce the RGB additive Colour Spectrum and white.



LED Technology

LEDs are extremely advantageous for the use in lighting systems: they are bright, emit very little heat, have a very long lifetime and low energy consumption. Also, LED fixtures often weigh less than conventional fixtures.



Eco-Friendly

With highly efficient energy use, a very long LED lifetime and low heat emission, this fixture is environmentally friendly.



DMX512

Created in 1986, DMX512 is a communications standard for lighting equipment. up to 32 DMX fixtures can be daisy-chained and controlled by a dedicated source, e.g. a lighting console. In a DMX512 daisy chain "network", the controller is called "master" while the daisy-chained fixtures are the "slaves."



"Master" and "Slave"

Simply put, this fixture is able to control or be controlled by other fixtures. In "master" mode and first in a chain, the fixture acts as a controller for fixtures ("slaves") that are connected to its output. In "slave" mode, the input of the fixture is connected to the output of a lighting console or "master." Fixtures that are daisy-chained to a slave's output also act as slaves.



Wireless Master/Slave

Simply put, this fixture is able to control or be controlled by other fixtures. In "master" mode and first in a chain, the fixture acts as a controller for fixtures ("slaves") that are connected to its output. In "slave" mode, the input of the fixture is connected to the output of a lighting console or "master." Fixtures that are daisy-chained to a slave's output also act as slaves.



Sound Control

In "sound to light" mode, the fixture is controlled by a built-in microphone capturing sounds to activate colour changes, e.g. the beat of the music.



Standalone Mode

In "standalone" mode, this fixture uses built-in programmes to control its functions. There is no need for a lighting console or "master" controller.



Strobe Lighting

Strobe lights emit a large number of periodic flashes per second seemingly freezing the movement of objects thus creating the illusion of slow motion.



Quad Colour RGBA/RGBW LEDs

Also called 4-in-1, quad colour LEDs add amber to the RGB spectrum for increased saturation, or white for improved contrast and definition.



RGB Additive Colour System

Additive colour mixes use varying amounts of red, green and blue to produce other colours and white. The RGB system is used in television, computer monitors and digital cameras to name a few.



RGB Additive Colour System Plus White LEDs

Adding white LEDs to the RGB system produces more contrast and definition and enhances the RGB generated white and pastel colours.



RGBWA

RGB additive colour system plus white and amber LEDs.



COB LED Technology

The "chip-on-board" multi-LED array is a recent technology that produces a high-density large-area light source with high brightness and uniform diffusion for a rich wash of colours.



Ingress Protection Rating of 65

The IP code rates the degree of protection against the intrusion of solid objects, water and access to hazardous parts. This fixture is completely protected against hazardous contact, water jets and ingress of dust.



UV

UV or black lights are employed for decorative and artistic lighting effects.



ILDA

This laser fixture can be controlled with any ILDA-compatible controller.



Single pixel control

This device features Single pixel control. With individual LED pixel on/off status and colour control this fixture is capable of creating animated patterns and video panel style pixel-mapping effects.



5-in-1 LED

These fixtures add amber and white to the RGB spectrum for increased saturation, and white for improved contrast and definition.



6-in-1 LED

These fixtures add amber, white and UV to the RGB spectrum for increased saturation, and white for improved contrast and definition. UV or black lights are employed for decorative and artistic lighting effects.



Infrared Remote Control

Featuring an IR sensor, this fixture allows control with a handheld IR remote.



WiFi

This device is compatible with all WiFi standards.



W-DMX™

This fixture features W-DMX™ technology for wireless DMX control.



Cold White

"Cold white" is a clean, very bright light in the 5,000 - 10,000 K range with a somewhat artificial touch that goes well with deeply saturated primary colours. Measured in degrees of Kelvin (K), colour temperature indicates the properties of light sources.



Warm White

"Warm white" is in the 2,000 - 4,000 K range providing a soft light with a slight touch of yellow that is natural and pleasing to the eye. Measured in degrees of Kelvin (K), colour temperature indicates the properties of light sources.



RDM-Enabled

This fixture is RDM-enabled. The Remote Device Management protocol extension to DMX allows bi-directional communication over a standard DMX network for the convenient configuration, management and monitoring of RDM devices connected to a dedicated RDM controller.



Unlimited Rotation

This moving head fixture features two high-speed high-torque motors for infinite horizontal and vertical rotation (pan and tilt).



iDMX® App Control

This fixture permits wireless control from any smartphone or tablet with Cameo's iDMX® Controller App.



Pan & Tilt

This moving head fixture features two high-speed high-torque motors for horizontal and vertical rotation (pan and tilt) which are controllable independently.



Art-Net

This fixture is Art-Net compatible.



Zoom Function

This fixture features a motorized or manual zoom to vary its beam angle.



Battery Powered

This fixture is powered by rechargeable high-capacity batteries.



Multiple Angles

This fixture provides multiple beam angles and shapes using the included or optional light shaping diffusers.



SnapMag® Technology

This fixture features SnapMag® technology that enables mounting SnapMag® filter frames in an instant without the need for tools.



Android Compatible

This fixture is delivered with a software allowing control via Android devices.



Mac OS and iOS Compatible

This fixture is delivered with a software allowing control via Mac OS X and iOS.



Windows Compatible

This fixture is delivered with a software allowing control via computers running on Windows.

Article no.	Page
CGB100S	92
CGB400S	92
CLABAR100	14
CLABEAM150	16
CLAM500	18
CLAS100	20
CLAS200	22
CLAS300	24
CLAS400	26
CLAS4INSERT	92
CLFLATBARND00R	94
CLFLOOD600IP65	66
CLFLOODIP65TRI	64
CLIA1000PRO	88
CLIDMXCORE	10
CLIH1400PRO	86
CLIH1500TPRO	84
CLMBZ100	32
CLMB100	30
CLPFLATPRO12	60
CLPFLATPRO12IP65	60
CLPFLATPRO18	58
CLPFLATPRO18IP65	58
CLPFLATPRO7	62



Article no.	Page
CLPFLATPRO7IP65	62
CLPFLATPRO7SPOT	70
CLPFLATPRO7XS	71
CLPIXBAR400PRO	79
CLPIXBAR500PRO	80
CLPIXBAR600IP65BSET	94
CLPIXBAR600PRO	81
CLPIXBAR600PROIP65	74
CLPIXBAR650CPRO	78
CLZB60BLS	40
CLZB60CASE6PC	92
CLZP60CLS	40
CLZP130LS	44
CLZP40LS	48
CLZPLSD6010	93
CLZZ120BARND00R	94
CLZW600	36
CLZW6004B	93
CLZW600SMLS100	93
CLZW600SMLS20	93
CLZW600SMLS40	93
CLZW600SMLS6010	93
CLZZ120	52





PRODUCT CATALOGUE PRO

YOUR CAMEO® DEALER:




cameolight.com



facebook.com/cameolightandsound
youtube.com/cameolightandsound
blog.adamhall.com

EDITION **2018**

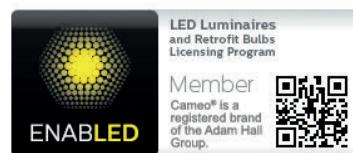

The information contained in this publication, including numerical data, has been prepared as a general guide to the products, but intending buyers and users must satisfy themselves as to the suitability and the safety of the products for their particular purposes and duties. No responsibility is assumed for any errors herein. The company reserves the right to alter the designs and material specifications of products shown in this publication without notice.

Cameo®
is a brand of  **adam hall** experience
event technology

SOUND
TECHNOLOGY

LIGHT
TECHNOLOGY

STAGE
EQUIPMENT

HARDWARE
FOR FLIGHTCASES

share the experience at
adamhall.com