


Part number

PN 1663 PI



Brief description:

bulkhead mounting housings, sockets, 2 poles + PE, 16 (A.C.), 200 ÷ 250V, 6 blue, inclined, IP44

Product description		Approvals / Standards	
Model	sockets	Reference standard	EN 60309-1 and -2
Version	LS-Type, for stage equipments	General ordering information	
Series	PN...PI	EAN13 code	8015747079686
Product type	flush-mounting	Packaging Information	
Style	inclined	Packaging length	280,00 mm
Family	plugs and socket-outlets	Packaging height	196,00 mm
Size	fixing centre distance socket 52 x 60 mm	Packaging width	280,00 mm
N. of poles	2 poles + 	Packaging weight	2,30 kg
Clock position	6	Packaging volume	15,37 dm ³
Technical data		Packaging description	Carton box
Current	16 A	Packaging quantity	20 Pcs
Voltage	200 ÷ 250 V	Packaging EAN code	8015747079792
Frequency	50 and 60 Hz.		
Operating temperature range (min, max)	-40°C ... +125°C		
Material	thermoplastic		
IP degree of protection	IP44		
Further technical details			
Weight	115,00 g		


Part number

PN 1663 PI



Catalogue drawings

(16A) PN ... PI

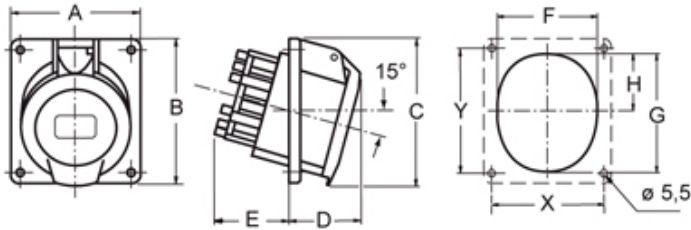

PN ... PI	A	B	C	D	E	F	G	H	X	Y
16A 2P+⊕	64	82	82	38	46	52	62	30	52	60
3P+⊕	64	82	82	42	47	57	65	28	52	60
3P+N+⊕	92	100	100	43	47	66	78	37,5	77	85

Notes

- Enclosure and spring lid colour RAL 9005 black
- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Flange with anti-ageing gasket
- PN...PI - PN...PQ types (IP44), spring lid
- Terminals with retained screws
- IP44 degree of protection (EN 60529)